

Series  
**VENTS KSB EC**



Centrifugal inline fan  
with capacity up to **1260 m<sup>3</sup>/h**  
in insulated casing

■ **Purpose**

The design of the KSB fans allows to use them in supply and exhaust ventilation systems for commercial, office and other public or industrial premises with high requirements to the noise level, efficiency and fan control and with limited space for mounting.

For example, the unit design includes a possibility of space-restricted installation above suspended ceilings. The KSB EC fans are designed for mounting into Ø 100, 125, 150, 160, 200, 250, 315 mm air ducts.

■ **Design**

The fan casing is made of galvanized sheet steel using heat- and sound-insulation material. The round connecting spigots are rubber sealed.

■ **Motor**

The unit is equipped with high-efficient external rotor EC motors and centrifugal impellers with backward curved blades.

These motors currently are the most cutting-edge solution in the field of energy conservation. The use of EC motors allows to reduce the electricity consumption by 35 % approximately while providing the high capacity and low noise level.

The EC motors are featured with high performance and totally controllable speed range.

The high efficiency (up to 90 %) is a definite advantage of the EC motors.

The motors are equipped with rolling-element bearings that provide a longer operation period (40 000 hours).

■ **Speed control**

The fans are controlled by means of a 0-10 V external control signal while the performance regulation is based on the feedback from the temperature, smoke and other sensors as well as other vital parameter settings.

As the control signal changes the EC fan changes speed accordingly to supply the exact air amount required by the ventilation system.

The maximum fan speed does not depend on the electric mains frequency enabling compatibility with both 50 Hz and 60 Hz networks.

The fans can be easily combined into a single computer-controlled network.

Special software allows for precise control over the operating parameters of the network units.

■ **Mounting**

The fans are intended for installation in round air ducts. They are installed between the air ducts.

The use of flexible connectors requires fixation of the fan on the building structure by means of supports, mounts or fixing brackets.

The fan can be fixed in any position, taking into account the air flow direction indicated by the arrow on the fan casing.

While mounting the fan provide enough access for servicing and repair operations.

Electrical connection and installation must be performed in accordance with the instruction manual and the electrical connections diagram applied to the terminal box.

**Designation key**

Series	Air duct diameter	Motor	Options
<b>VENTS KSB</b>	100; 125; 150; 160; 200; 250; 315	<b>EC:</b> synchronous electronically commutated motor	<b>P:</b> integrated smooth speed controller

**Accessories**



Silencer

Filters

Heaters


Backdraft damper

Air shutter

Speed controller

**Overall dimensions**

Model	Dimensions [mm]								
	Ø D	L	B1	L	L1	B	H	L2	B2
KSB 100 EC	99	325	447	325	388 375	355	200	280	380
KSB 125 EC	124	325	447	325	388 375	355	200	280	380
KSB 150 EC	149	325	447	325	418 405	385	220	310	410
KSB 160 EC	159	325	447	355	418 405	385	220	310	410
KSB 200 EC	199	435	590	435	503 490	485	295	368	506
KSB 250 EC	249	435	590	435	503 490	485	295	368	506
KSB 315 EC	314	435	650	435	663 560	545	405	438	566


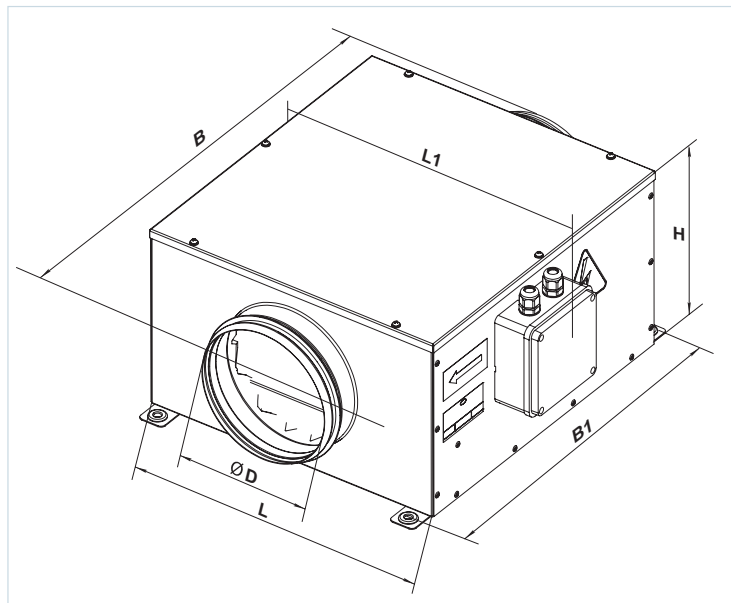


FAN SERIES VENTS KSB EC

**Technical data**



	KSB 100 EC	KSB 125 EC	KSB 150 EC KSB 160 EC	KSB 200 EC	KSB 250 EC	KSB 315 EC
Unit voltage [V/50 (60) Hz]	1~230					
Power [W]	92.7	92.6	94.8	101.6	163.7	164.3
Current [A]	0.75	0.75	0.77	0.83	1.34	1.35
Maximum air flow [m³/h]	278	357	425	700	1145	1260
RPM [min <sup>-1</sup> ]	3200	3200	3200	2580	2510	2620
Sound pressure level at 3 m distance [dBA]	32	34	35	37	40	42
Transported air temperature [°C]	-25...+60	-25...+60	-25...+60	-25...+60	-25...+60	-25...+60
Energy efficiency class	C	C	B	B	B	-
Ingress protection rating	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4

VENTS KSB EC

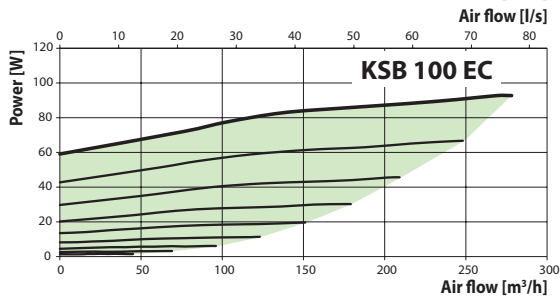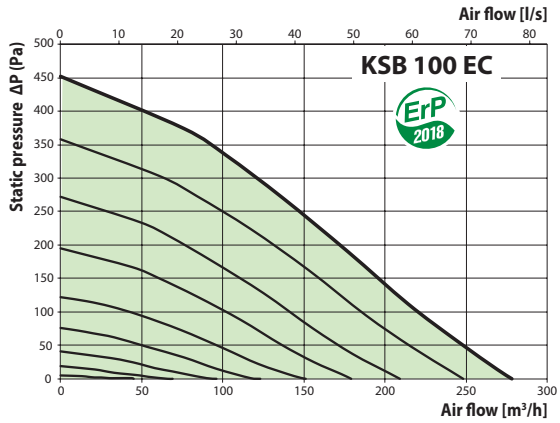



Sound power level [dBA], A-weighted	[Hz]	Octave frequency band, [Hz]								LpA, 3 m [dBA]	LpA, 1 m [dBA]	
		Gen.	63	125	250	500	1000	2000	4000			8000
L <sub>WA</sub> to inlet	[dBA]	61	47	55	59	51	47	41	41	32	41	51
L <sub>WA</sub> to outlet	[dBA]	64	52	59	60	57	47	41	42	36	44	54
L <sub>WA</sub> to environment	[dBA]	53	42	49	49	41	36	31	27	23	32	42

VENTS KSB EC

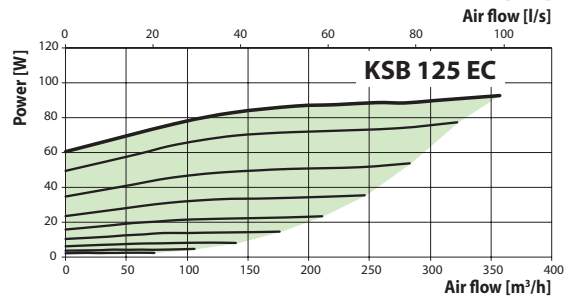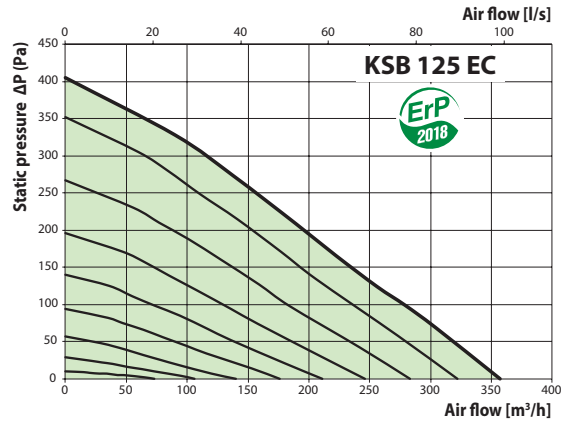



Sound power level [dBA], A-weighted	[Hz]	Octave frequency band, [Hz]								LpA, 3 m [dBA]	LpA, 1 m [dBA]	
		Gen.	63	125	250	500	1000	2000	4000			8000
L <sub>WA</sub> to inlet	[dBA]	60	46	54	58	50	46	40	40	31	40	50
L <sub>WA</sub> to outlet	[dBA]	63	51	58	59	56	46	40	41	35	43	53
L <sub>WA</sub> to environment	[dBA]	55	44	51	51	43	38	32	28	24	34	44

VENTS KSB EC

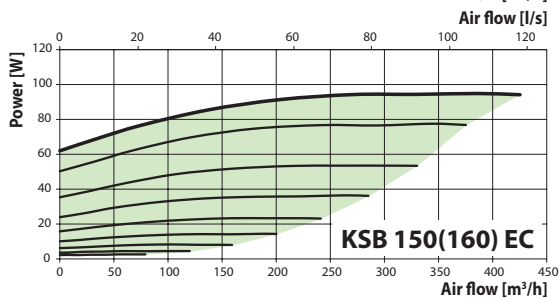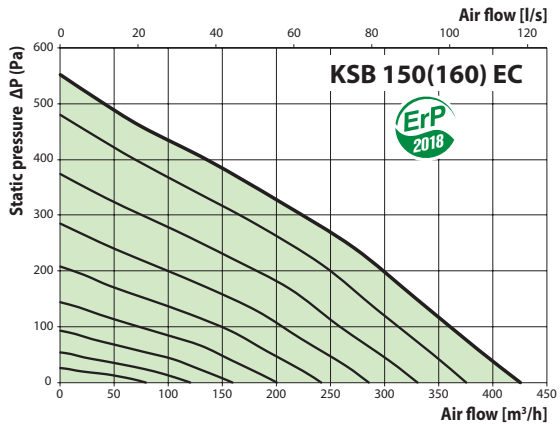



Sound power level [dBA], A-weighted	[Hz]	Octave frequency band, [Hz]								LpA, 3 m [dBA]	LpA, 1 m [dBA]	
		Gen.	63	125	250	500	1000	2000	4000			8000
L <sub>WA</sub> to inlet	[dBA]	63	48	56	60	52	48	42	42	32	42	52
L <sub>WA</sub> to outlet	[dBA]	65	53	60	61	58	48	42	43	36	45	55
L <sub>WA</sub> to environment	[dBA]	56	45	52	52	44	39	33	29	24	35	45

VENTS KSB EC

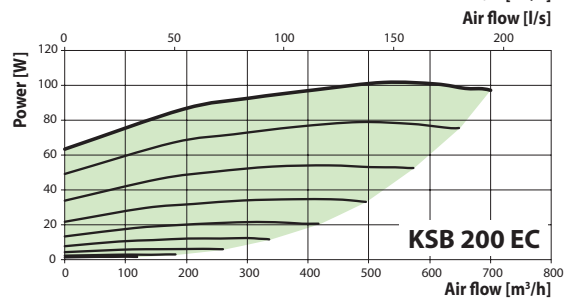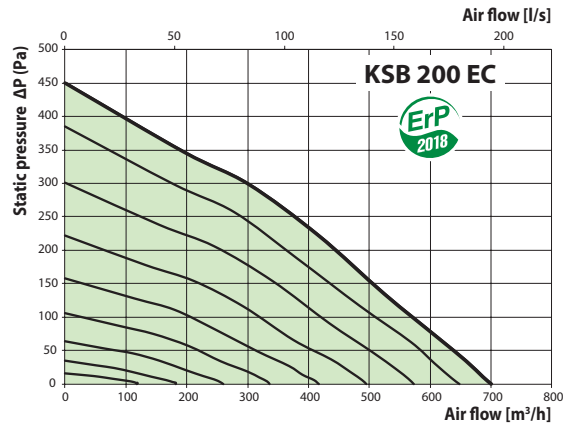



Sound power level [dBA], A-weighted	[Hz]	Octave frequency band, [Hz]								LpA, 3 m [dBA]	LpA, 1 m [dBA]	
		Gen.	63	125	250	500	1000	2000	4000			8000
L <sub>WA</sub> to inlet	[dBA]	62	46	59	59	41	37	34	30	23	41	51
L <sub>WA</sub> to outlet	[dBA]	65	52	64	51	47	43	35	29	22	44	54
L <sub>WA</sub> to environment	[dBA]	57	46	53	54	45	40	33	30	25	37	47

**VENTS KSB EC**

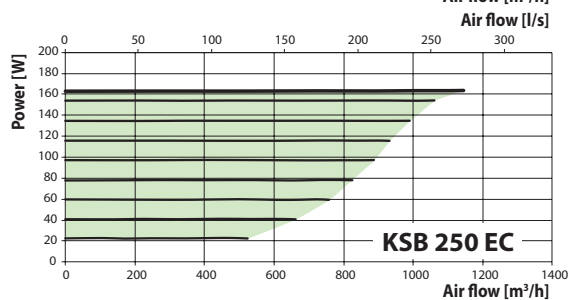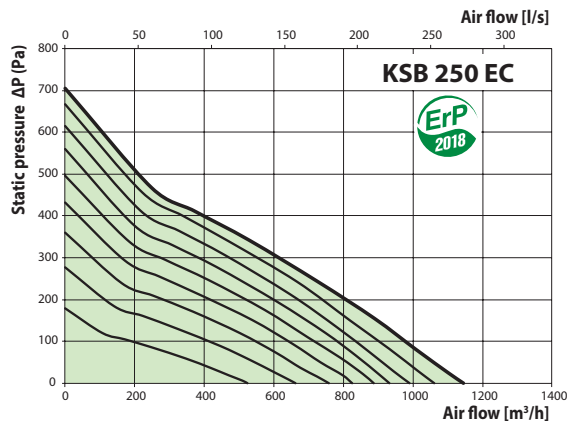

Sound power level [dBA], A-weighted	[Hz]	Octave frequency band, [Hz]								LpA, 3 m [dBA]	LpA, 1 m [dBA]	
		Gen.	63	125	250	500	1000	2000	4000			8000
L <sub>WA</sub> to inlet	[dBA]	66	49	62	62	44	39	36	32	24	45	55
L <sub>WA</sub> to outlet	[dBA]	68	55	68	54	50	45	37	31	24	48	58
L <sub>WA</sub> to environment	[dBA]	61	49	57	57	48	43	36	32	27	40	50

**VENTS KSB EC**

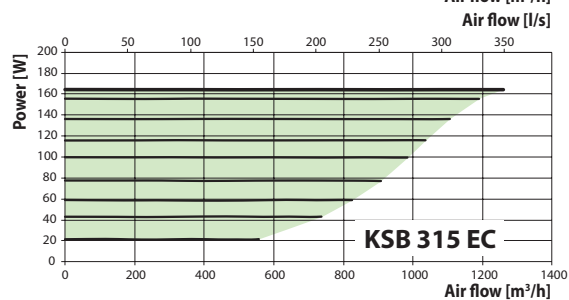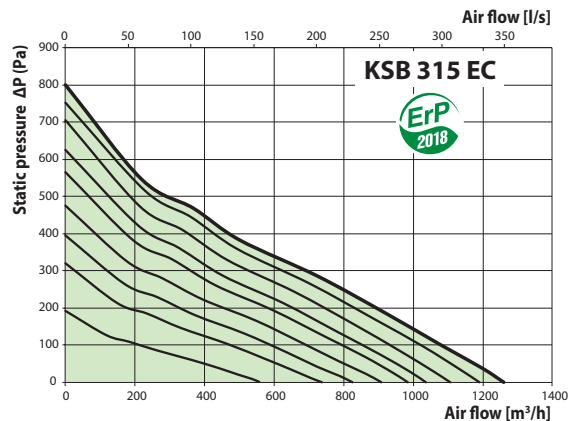

Sound power level [dBA], A-weighted	[Hz]	Octave frequency band, [Hz]								LpA, 3 m [dBA]	LpA, 1 m [dBA]	
		Gen.	63	125	250	500	1000	2000	4000			8000
L <sub>WA</sub> to inlet	[dBA]	67	52	61	65	56	51	45	45	35	46	56
L <sub>WA</sub> to outlet	[dBA]	70	56	65	66	62	51	44	46	39	49	59
L <sub>WA</sub> to environment	[dBA]	62	51	58	59	50	44	37	32	28	42	52