


100 LD T turbo



Axial decorative fans for extract ventilation with panels

- Maximum airflow: 115
- Sound pressure level LpA at 3 m: 36
- Motor type: AC
- Casing material: Plastic
- Timer: Turn off timer

| | Unit of measurement | 100 LD T turbo |
|---------------------------------|---------------------|----------------|
| Connected air duct size | mm | 100 |
| Speed | - | 1 |
| Minimum supply voltage | V | 220 |
| Maximum supply voltage | V | 240 |
| Power supply frequency | Hz | 50 |
| Rated power | W | 16 |
| Unit current | A | 0.1 |
| Maximum airflow | m ³ /h | 115 |
| Sound pressure level LpA at 3 m | dB(A) | 36 |
| Weight | kg | 0.68 |
| Ambient air temperature min | °C | 1 |
| Ambient air temperature max | °C | 40 |
| Ingress protection rating | - | IP34 |

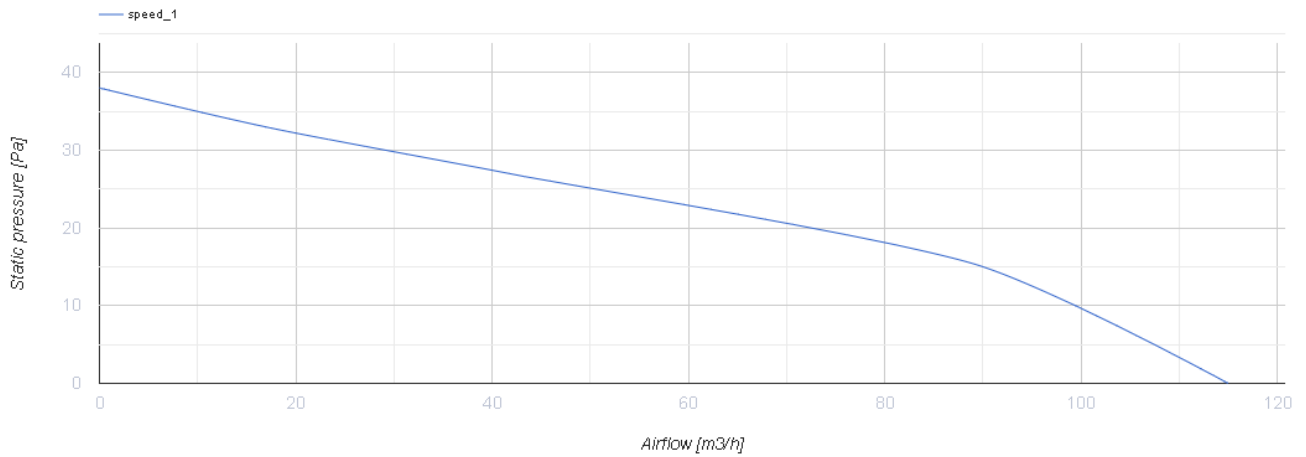

Dimensions

| ØD | B | H | L | L1 |
|-----|-----|-----|-----|----|
| 100 | 152 | 120 | 126 | 30 |



Accessories

Flanges

| Name | Photo | Description |
|------------------------|-------|--|
| FO 100 | | The window flange applicable for all VENTS fans except for VKO, VKO1, iFan, Quiet, MAO, CF |
| KO 100 | | Back valve is designed for domestic fan series VENTS M, M1, D, S, M3, X, X1, LD, LD Fresh time, Silenta-M, Silenta-S, Modern, Vitro star, Z star, X star |

