


100 MA L turbo



Axial fans with automatic louver shutters for exhaust ventilation

- Maximum airflow: 128
- Sound pressure level LpA at 3 m: 37
- Motor type: AC
- Casing material: Polypropylene/Thermoplastic elastomer

| | Unit of measurement | 100 MA L turbo |
|---------------------------------|---------------------|----------------|
| Connected air duct size | mm | 100 |
| Speed | - | 1 |
| Minimum supply voltage | V | 220 |
| Maximum supply voltage | V | 240 |
| Power supply frequency | Hz | 50/60 |
| Rated power | W | 20 |
| Unit current | A | 0.1 |
| Maximum airflow | m ³ /h | 128 |
| Sound pressure level LpA at 3 m | dB(A) | 37 |
| Weight | kg | 0.65 |
| Ambient air temperature min | °C | 1 |
| Ambient air temperature max | °C | 40 |
| Ingress protection rating | - | IP24 |

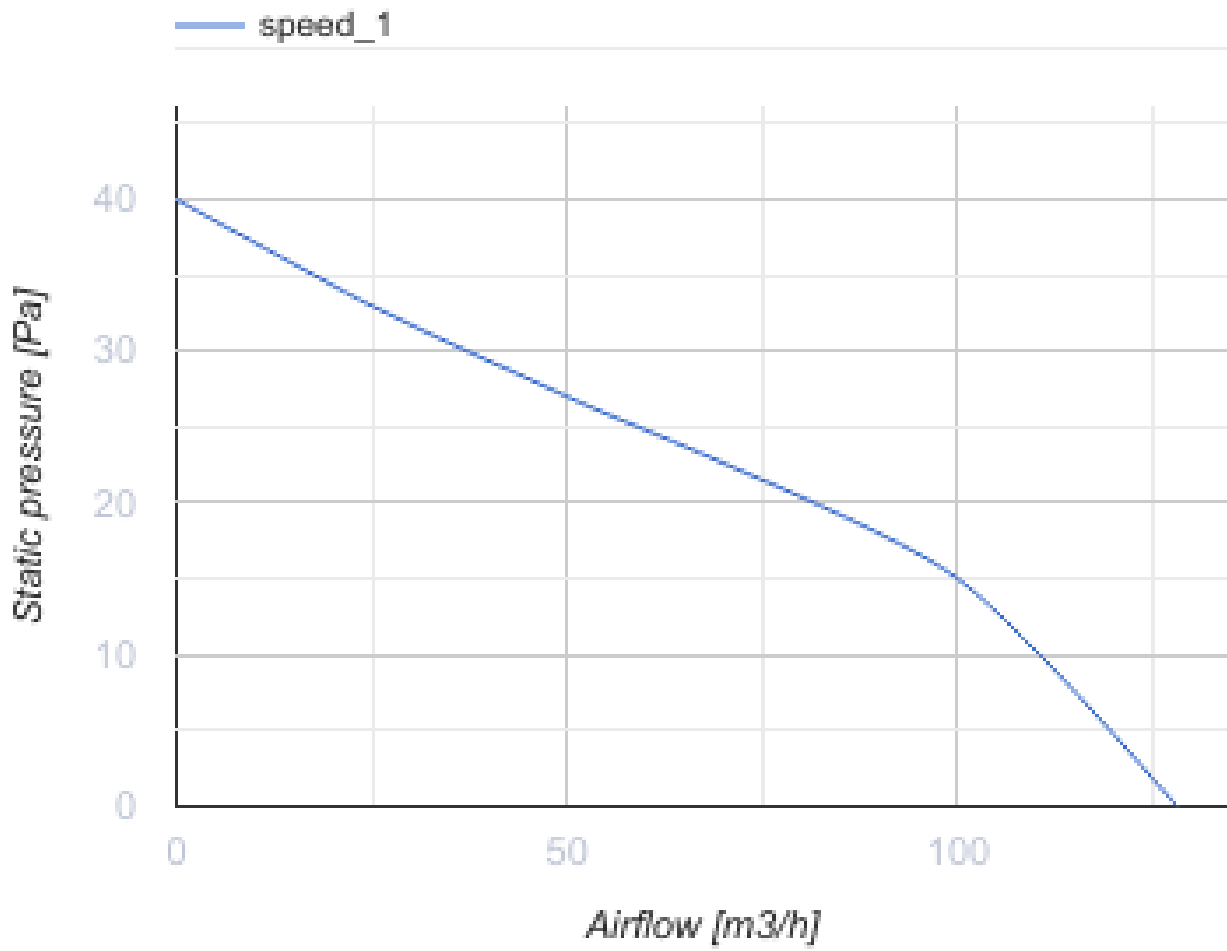


Dimensions

| ∅D | B | B1 | B2 | H | L | L1 |
|-----|-----|-----|-----|-----|----|----|
| 100 | 165 | 150 | 150 | 150 | 92 | 32 |



Accessories

Flanges

| Name | Photo | Description |
|------------------------|--|--|
| FO_100 |  | The window flange applicable for all VENTS fans except for VKO, VKO1, iFan, Quiet, MAO, CF |