


100 MF One T L (220 V/60 Hz)

Quiet axial extract fans suitable for use in Zone 1

- Motor type: AC
- Impeller type: Mixed-flow
- Casing material: ABS Plastic
- Backdraft protection: Backdraft damper
- Timer: Turn off timer



| | Unit of measurement | 100 MF One T L (220 V/60 Hz) |
|---------------------------------|---------------------|------------------------------|
| Connected air duct size | mm | 100 |
| Speed | - | 1 |
| Minimum supply voltage | V | 220 |
| Maximum supply voltage | V | 220 |
| Power supply frequency | Hz | 60 |
| Rated power | W | |
| Unit current | A | |
| Maximum airflow | m ³ /h | |
| Sound pressure level LpA at 3 m | dB(A) | |
| Weight | kg | 0.45 |
| Ambient air temperature min | °C | 1 |
| Ambient air temperature max | °C | 40 |
| Ingress protection rating | - | IP44 Zone 1 |

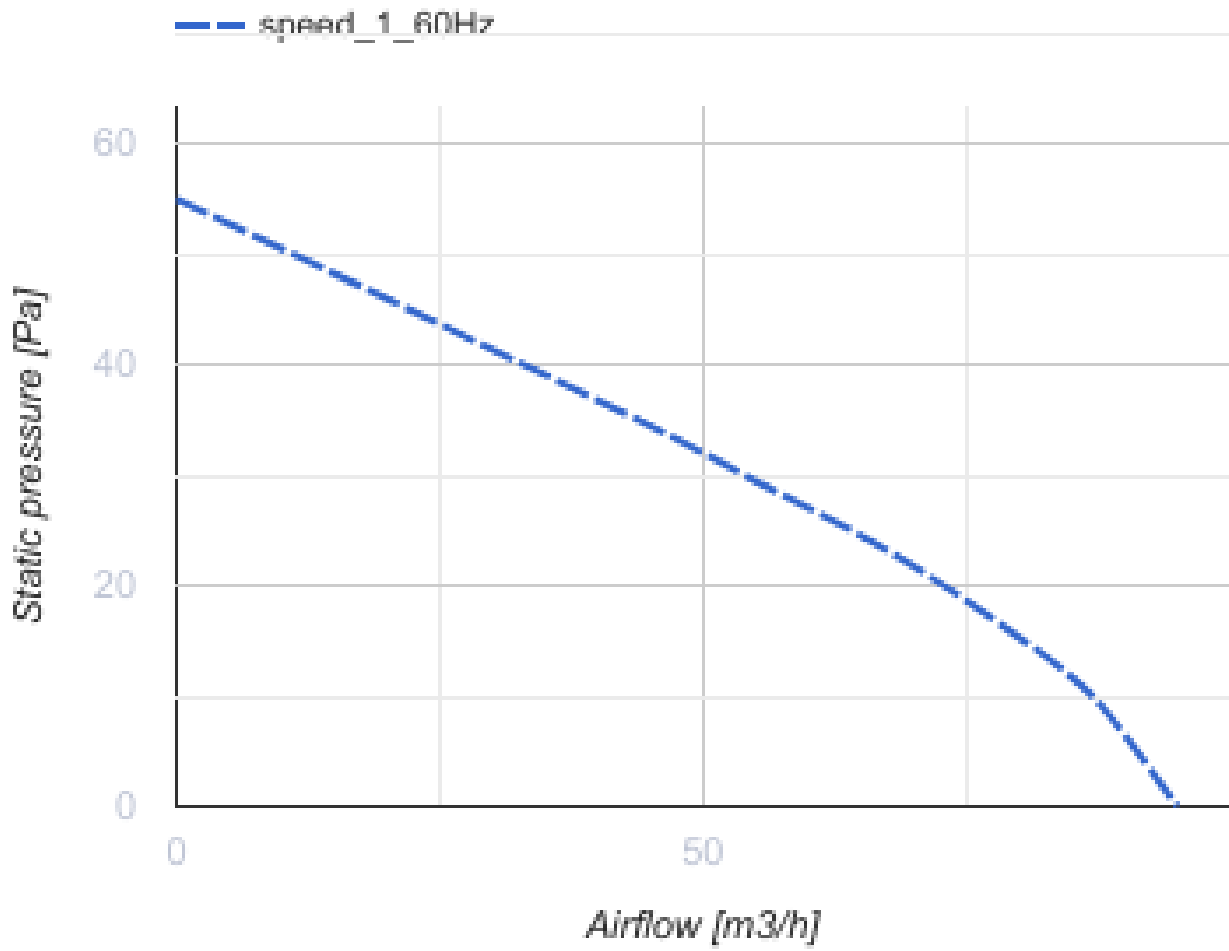


Dimensions

| D | B | L | L1 |
|----------|----------|----------|-----------|
| 99 | 150 | 79 | 19 |



Accessories

Flanges

| Name | Photo | Description |
|------------------------|---|--|
| FO_100 |  | The window flange applicable for all VENTS fans except for VKO, VKO1, iFan, Quiet, MAO, CF |