

100 Solid Glass TH




Low-noise and low-power extract axial fan suitable for use in Zone 1

- Maximum airflow: 85
- Sound pressure level LpA at 3 m: 26
- Motor type: AC
- Casing material: Plastic
- Backdraft protection: Backdraft damper
- Humidity sensor
- Timer: Turn off timer

| | Unit of measurement | 100 Solid Glass TH |
|---------------------------------|---------------------|--------------------|
| Connected air duct size | mm | 100 |
| Speed | - | 1 |
| Minimum supply voltage | V | 220 |
| Maximum supply voltage | V | 240 |
| Power supply frequency | Hz | 50 |
| Rated power | W | 8 |
| Unit current | A | 0.5 |
| Maximum airflow | m ³ /h | 85 |
| rotation speed at 50hz | - | 2100 |
| Sound pressure level LpA at 3 m | dB(A) | 26 |
| Weight | kg | 0.51 |
| Ambient air temperature min | °C | 1 |
| Ambient air temperature max | °C | 45 |
| Ingress protection rating | - | IP44 Zone 1 |


Dimensions

| Ø D | B | L | L1 |
|-----|-----|----|----|
| 99 | 160 | 79 | 38 |

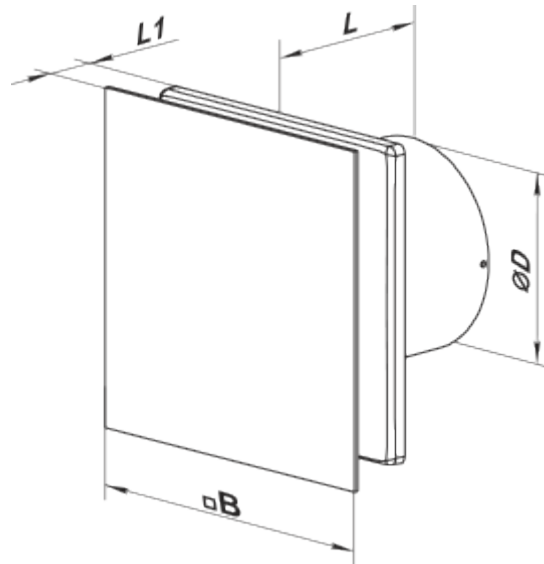

Accessories

Cooker Hoods

| Name | Photo | Description |
|------------------------|--|--|
| FO 100 |  | The window flange applicable for all VENTS fans except for VKO, VKO1, iFan, Quiet, MAO, CF |