

# 100 Style Eco



Innovative domestic extract fan with automatic shutters, low-noise operation and low energy consumption


- Maximum airflow: 101
- Sound pressure level LpA at 3 m: 27
- Motor type: AC
- Casing material: Plastic

	Unit of measurement	100 Style Eco	
Connected air duct size	mm	100	
Speed	-	2	
Minimum supply voltage	V	100	
Maximum supply voltage	V	240	
Power supply frequency	Hz	50/60	
Rated power	W	3	5
Unit current	A	0.126	0.196
Maximum airflow	m <sup>3</sup> /h	70	101
Sound pressure level LpA at 3 m	dB(A)	22	27
Weight	kg	0.55	
Ambient air temperature min	°C	1	
Ambient air temperature max	°C	40	
Ingress protection rating	-	IP44	
ErP compliance	-	2016	
Cold - Specific energy consumption (SEC)	kWh/(m <sup>2</sup> /a)	32.2	
SEC Class Cold	-	B	
Average - Specific energy consumption (SEC)	kWh/(m <sup>2</sup> /a)	15.8	
SEC Class Average	-	E	
Warm - Specific energy consumption (SEC)	kWh/(m <sup>2</sup> /a)	6.4	
SEC Class Warm	-	F	
Unit category	-	RVU	

Type of ventilation unit	-	Unidirectional
Type of drive installed	-	2-speed
Type of heat recovery system	-	None
Maximum flow rate	m <sup>3</sup> /h	101
Electric power input	W	5
Reference flow rate	m <sup>3</sup> /s	0.019
Specific power input (SPI)	W/(m <sup>3</sup> /h)	0.043
Control typology	-	Manual control
Maximum external leakage rates	%	2.7
Cold - The annual electricity consumption (AEC)	kWh/a	54
Average - The annual electricity consumption (AEC)	kWh/a	54
Warm - Jährlicher Stromverbrauch (JSV)	kWh/a	54
Cold - The annual heating saved (AHS)	kWh/a	3355
The annual heating saved (AHS) Average	kWh/a	1715
The annual heating saved (AHS) Warm	kWh/a	776
Sound power level	dB(A)	42
Declared typology	-	RVU UVU


## Dimensions

Ø d	a	b	c	e
99	175	221	77	39

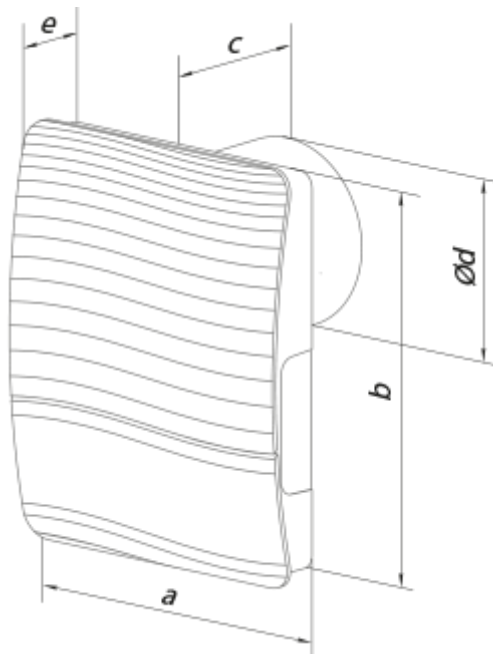

## Accessories

### Cooker Hoods

Name	Photo	Description
<a href="#">FO 100</a>		The window flange applicable for all VENTS fans except for VKO, VKO1, iFan, Quiet, MAO, CF