


125 M press



Axial fans for exhaust ventilation


- Maximum airflow: 188
- Sound pressure level LpA at 3 m: 39
- Motor type: AC
- Casing material: Plastic

	Unit of measurement	125 M press
Connected air duct size	mm	125
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50/60
Rated power	W	22
Unit current	A	0.105
Maximum airflow	m ³ /h	188
Sound pressure level LpA at 3 m	dB(A)	39
Weight	kg	0.81
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ingress protection rating	-	IP34

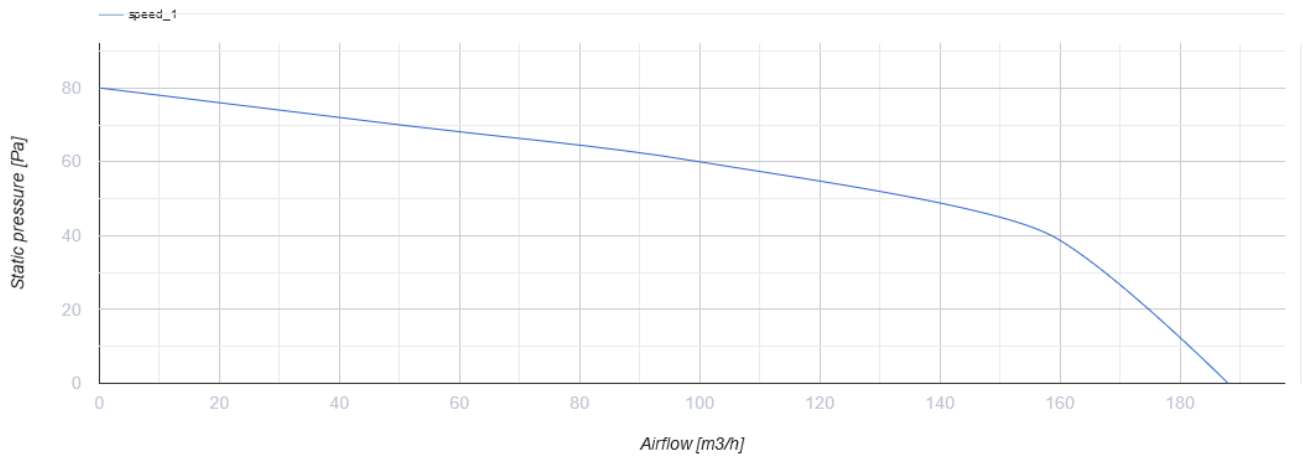

Dimensions

ØD	B	H	L	L1
125	180	150	94	25

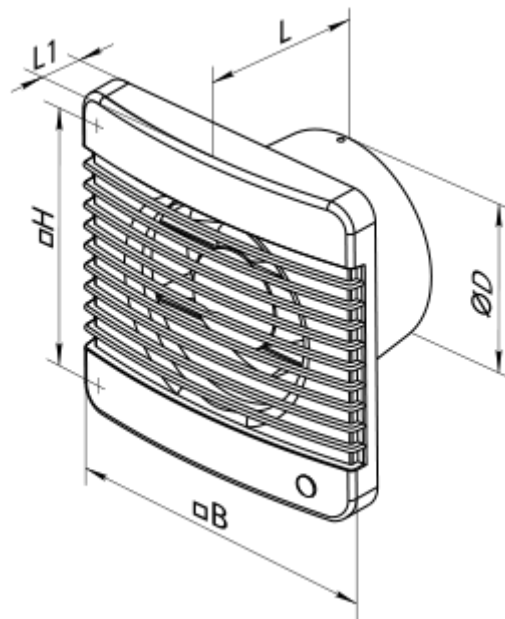

Accessories

Flanges


Name	Photo	Description
KO 125		Back valve is designed for domestic fan series VENTS M, M1, D, S, M3, X, X1, LD, LD Fresh time, Silenta-M, Silenta-S, Modern, Vitro star, Z star, X star

[FO_125](#)



The window flange applicable for all VENTS fans except for VKO, VKO1, iFan, Quiet, MAO, CF

Ecodesign

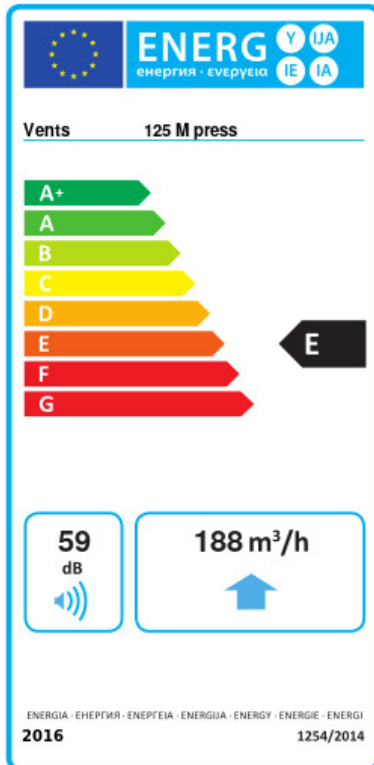

Trademark	Vents					
Model	125 M press					
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold		Average		Warm	
	-29.9	B	-13.5	E	-4.1	F
Type of ventilation unit	Unidirectional					
Type of drive installed	Single speed					
Type of heat recovery system	None					
Maximum flow rate (m ³ /h)	188					
Electric power input (W)	22					
Reference flow rate (m ³ /s)	0.037					
Specific power input (SPI) (W/(m ³ /h))	0.117					
Control typology	Manual control					
Maximum external leakage rates (%)	2.7					
Sound power level (dB(A))	59					
Declared typology	RVU UVU					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	147		147		147	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	3355		1715		776	