

# 125 PF turbo



Axial fans for exhaust ventilation with air capacity up to 342 m<sup>3</sup>/h


- Maximum airflow: 230
- Sound pressure level LpA at 3 m: 42
- Motor type: AC
- Casing material: Plastic

	Unit of measurement	125 PF turbo
Connected air duct size	mm	125
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50/60
Rated power	W	24
Unit current	A	0.1
Maximum airflow	m <sup>3</sup> /h	230
Sound pressure level LpA at 3 m	dB(A)	42
Weight	kg	0.6
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ingress protection rating	-	IP34
ErP compliance	-	2016
Cold - Specific energy consumption (SEC)	kWh/(m <sup>2</sup> /a)	30.3
SEC Class Cold	-	B
Average - Specific energy consumption (SEC)	kWh/(m <sup>2</sup> /a)	13.9
SEC Class Average	-	E
Warm - Specific energy consumption (SEC)	kWh/(m <sup>2</sup> /a)	4.5
SEC Class Warm	-	F
Unit category	-	RVU

Type of ventilation unit	-	Unidirectional
Type of drive installed	-	Single speed
Type of heat recovery system	-	None
Maximum flow rate	m <sup>3</sup> /h	230
Electric power input	W	24
Reference flow rate	m <sup>3</sup> /s	0.045
Specific power input (SPI)	W/(m <sup>3</sup> /h)	0.104
Control typology	-	Manual control
Maximum external leakage rates	%	2.7
Cold - The annual electricity consumption (AEC)	kWh/a	131
Average - The annual electricity consumption (AEC)	kWh/a	131
Warm - Jährlicher Stromverbrauch (JSV)	kWh/a	131
Cold - The annual heating saved (AHS)	kWh/a	3355
The annual heating saved (AHS) Average	kWh/a	1715
The annual heating saved (AHS) Warm	kWh/a	776
Sound power level	dB(A)	62
Declared typology	-	RVU UVU

## Dimensions

Ø D	Ø D1	L	L1
125	166	110	15

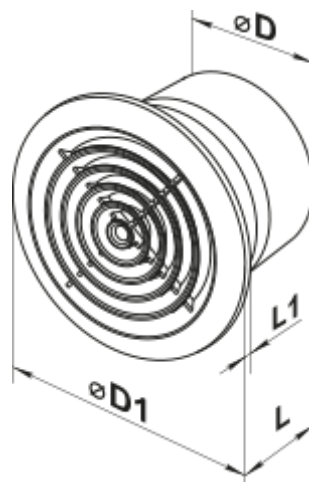

## Accessories

### Cooker Hoods

Name	Photo	Description
------	-------	-------------

[FO\\_125](#)



The window flange applicable for all VENTS fans except for VKO, VKO1, iFan, Quiet, MAO, CF