

125 Solid T1



Low-noise and low-power extract axial fan with air flow up to 155 m³/h


- Maximum airflow: 155
- Sound pressure level LpA at 3 m: 32
- Motor type: AC
- Casing material: Plastic
- Backdraft protection: Backdraft damper
- Timer: Turn off timer

	Unit of measurement	125 Solid T1
Connected air duct size	mm	125
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50
Rated power	W	18
Unit current	A	0.11
Maximum airflow	m ³ /h	155
Sound pressure level LpA at 3 m	dB(A)	32
Weight	kg	0.75
Ambient air temperature min	°C	1
Ambient air temperature max	°C	45
Ingress protection rating	-	IP44
ErP compliance	-	2016
Cold - Specific energy consumption (SEC)	kWh/(m ² /a)	33.2
SEC Class Cold	-	B
Average - Specific energy consumption (SEC)	kWh/(m ² /a)	15.3
SEC Class Average	-	E
Warm - Specific energy consumption (SEC)	kWh/(m ² /a)	5
SEC Class Warm	-	F
Unit category	-	RVU

Type of ventilation unit	-	Unidirectional
Type of drive installed	-	Single speed
Type of heat recovery system	-	None
Maximum flow rate	m ³ /h	155
Electric power input	W	18
Reference flow rate	m ³ /s	0.03
Specific power input (SPI)	W/(m ³ /h)	0.116
Control typology	-	Clock control
Maximum external leakage rates	%	2.7
Cold - The annual electricity consumption (AEC)	kWh/a	138
Average - The annual electricity consumption (AEC)	kWh/a	138
Warm - Jährlicher Stromverbrauch (JSV)	kWh/a	138
Cold - The annual heating saved (AHS)	kWh/a	3667
The annual heating saved (AHS) Average	kWh/a	1874
The annual heating saved (AHS) Warm	kWh/a	848
Sound power level	dB(A)	52
Declared typology	-	RVU UVU

Dimensions

Ø D	B	L	L1
123.5	180	85	38

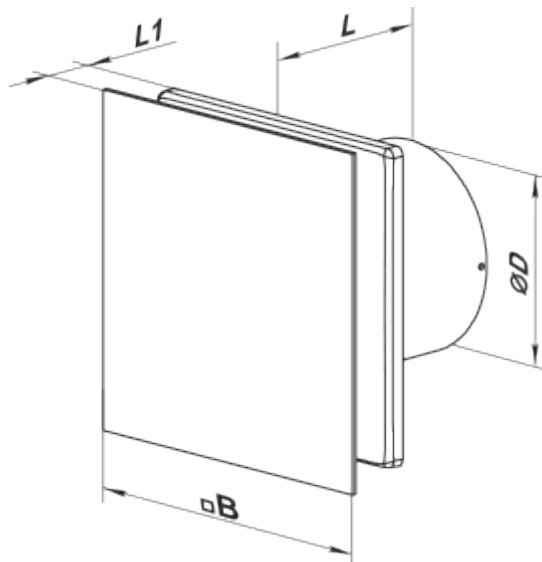

Accessories

Cooker Hoods

Name	Photo	Description
------	-------	-------------

[FO_125](#)

The window flange applicable for all VENTS fans except for VKO, VKO1, iFan, Quiet, MAO, CF