

# 150 M L turbo



Axial fans for exhaust ventilation

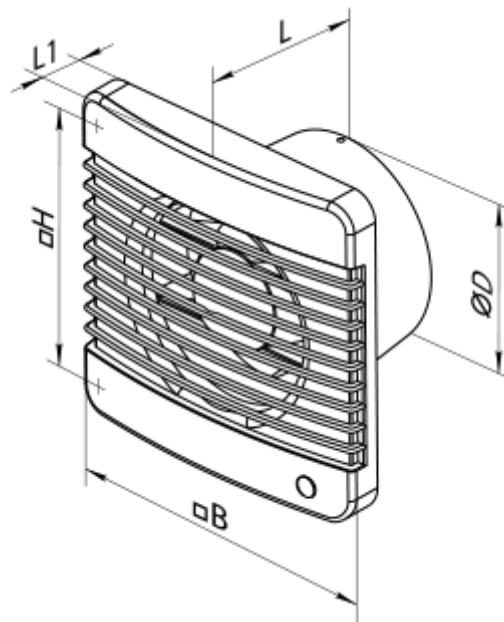
- Maximum airflow: 345
- Sound pressure level LpA at 3 m: 41
- Motor type: AC
- Casing material: Plastic

	Unit of measurement	150 M L turbo
Connected air duct size	mm	150
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50
Rated power	W	29
Unit current	A	0.13
Maximum airflow	m <sup>3</sup> /h	345
Sound pressure level LpA at 3 m	dB(A)	41
Weight	kg	0.93
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ingress protection rating	-	IP34
ErP compliance	-	2016
Cold - Specific energy consumption (SEC)	kWh/(m <sup>2</sup> /a)	0
SEC Class Cold	-	B
Average - Specific energy consumption (SEC)	kWh/(m <sup>2</sup> /a)	0
SEC Class Average	-	E
Warm - Specific energy consumption (SEC)	kWh/(m <sup>2</sup> /a)	0
SEC Class Warm	-	F
Unit category	-	RVU

Type of ventilation unit	-	Unidirectional
Type of drive installed	-	Single speed
Type of heat recovery system	-	None
Maximum flow rate	m <sup>3</sup> /h	0
Electric power input	W	0
Reference flow rate	m <sup>3</sup> /s	0
Specific power input (SPI)	W/(m <sup>3</sup> /h)	0
Control typology	-	Manual control
Maximum external leakage rates	%	0
Cold - The annual electricity consumption (AEC)	kWh/a	0
Average - The annual electricity consumption (AEC)	kWh/a	0
Warm - Jährlicher Stromverbrauch (JSV)	kWh/a	0
Cold - The annual heating saved (AHS)	kWh/a	0
The annual heating saved (AHS) Average	kWh/a	0
The annual heating saved (AHS) Warm	kWh/a	0
Sound power level	dB(A)	0
Declared typology	-	RVU UVU



## Dimensions

∅D	B	H	L	L1
150	206	182	106	25.5



## Accessories

### Cooker Hoods

Name	Photo	Description
<a href="#">FO 150</a>		The window flange applicable for all VENTS fans except for VKO, VKO1, iFan, Quiet, MAO, CF
<a href="#">KO 150</a>		Back valve is designed for domestic fan series VENTS M, M1, D, S, M3, X, X1, LD, LD Fresh time, Silenta-M, Silenta-S, Modern, Vitro star, Z star, X star