


150 MA press



Axial fans with automatic louver shutters for exhaust ventilation

- Maximum airflow: 307
- Sound pressure level LpA at 3 m: 41
- Motor type: AC
- Casing material: Polypropylene/Thermoplastic elastomer

	Unit of measurement	150 MA press
Connected air duct size	mm	150
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50
Rated power	W	32
Unit current	A	0.14
Maximum airflow	m ³ /h	307
Sound pressure level LpA at 3 m	dB(A)	41
Weight	kg	0.99
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ingress protection rating	-	IP24

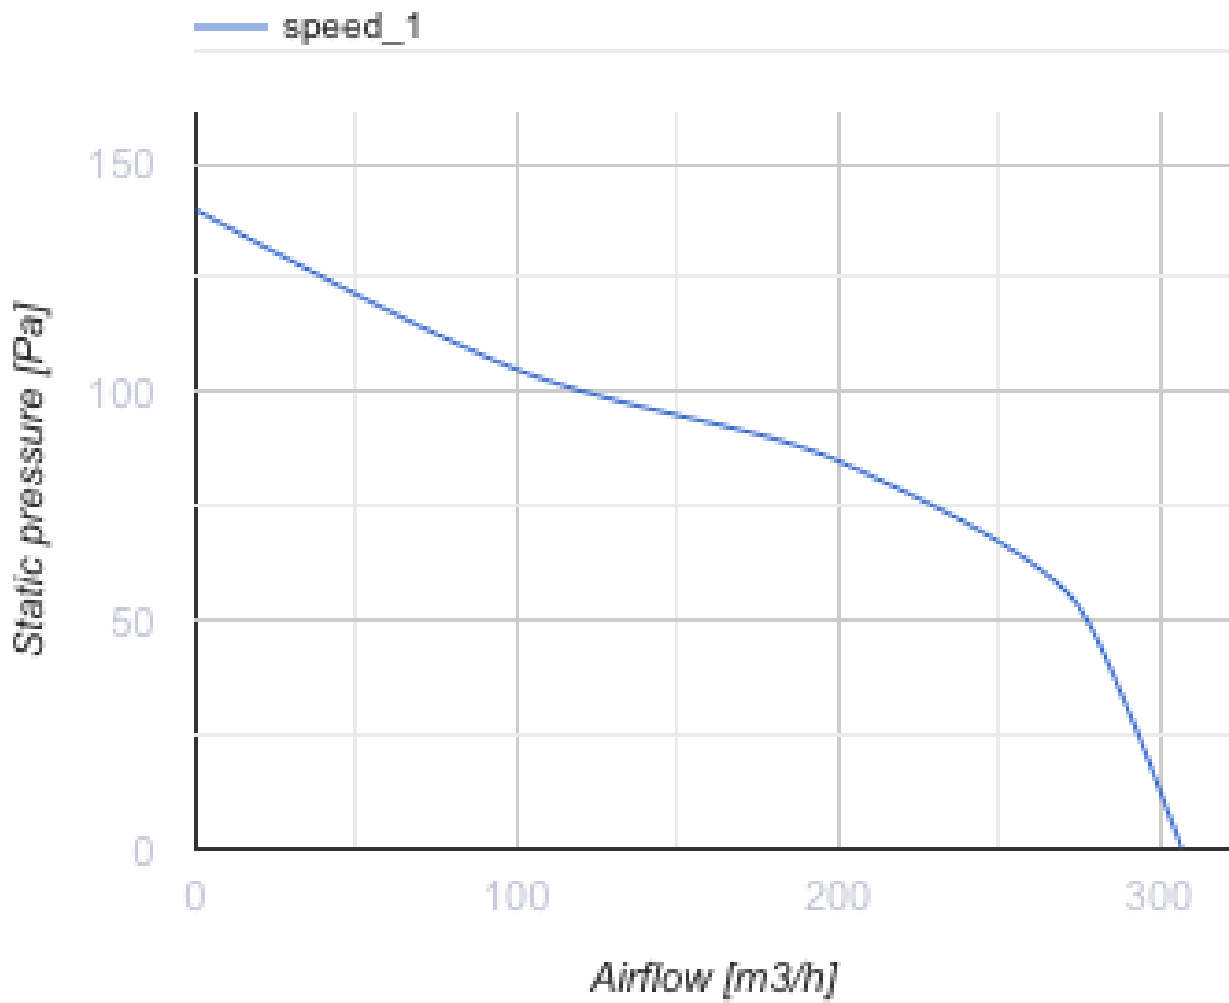


Dimensions

∅D	B	B1	B2	H	L	L1
150	212	196	150	195	114	33




Accessories

Flanges

Name	Photo	Description
FO 150		The window flange applicable for all VENTS fans except for VKO, VKO1, iFan, Quiet, MAO, CF

Ecodesign

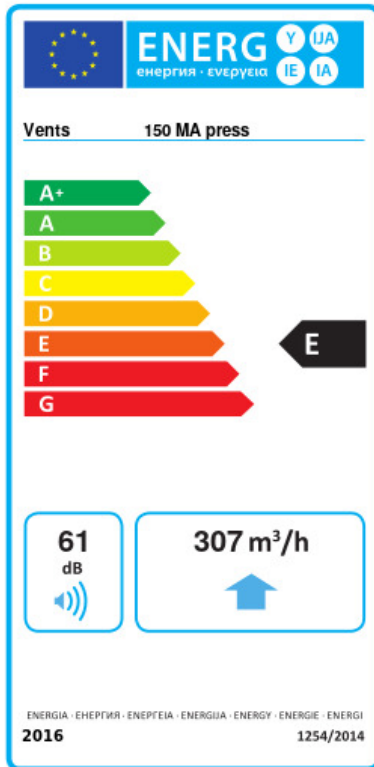

Trademark	Vents					
Model	150 MA press					
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold		Average		Warm	
	-31.5	B	-15.1	E	-5.7	F
Type of ventilation unit	Unidirectional					
Type of drive installed	Multi-speed					
Type of heat recovery system	None					
Maximum flow rate (m ³ /h)	307					
Electric power input (W)	32					
Reference flow rate (m ³ /s)	0.06					
Specific power input (SPI) (W/(m ³ /h))	0.067					
Control typology	Manual control					
Maximum external leakage rates (%)	2.7					
Declared typology	RVU UVU					
Sound power level (dB(A))	61					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	84		84		84	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	3355		1715		776	