


# 150 MA01 turbo



Axial window fans for exhaust ventilation

- Maximum airflow: 345
- Sound pressure level LpA at 3 m: 43
- Motor type: AC
- Casing material: Plastic

	Unit of measurement	150 MA01 turbo
Connected air duct size	mm	150
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50
Rated power	W	29
Unit current	A	0.13
Maximum airflow	m <sup>3</sup> /h	345
Sound pressure level LpA at 3 m	dB(A)	43
Weight	kg	1.67
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ingress protection rating	-	IP24

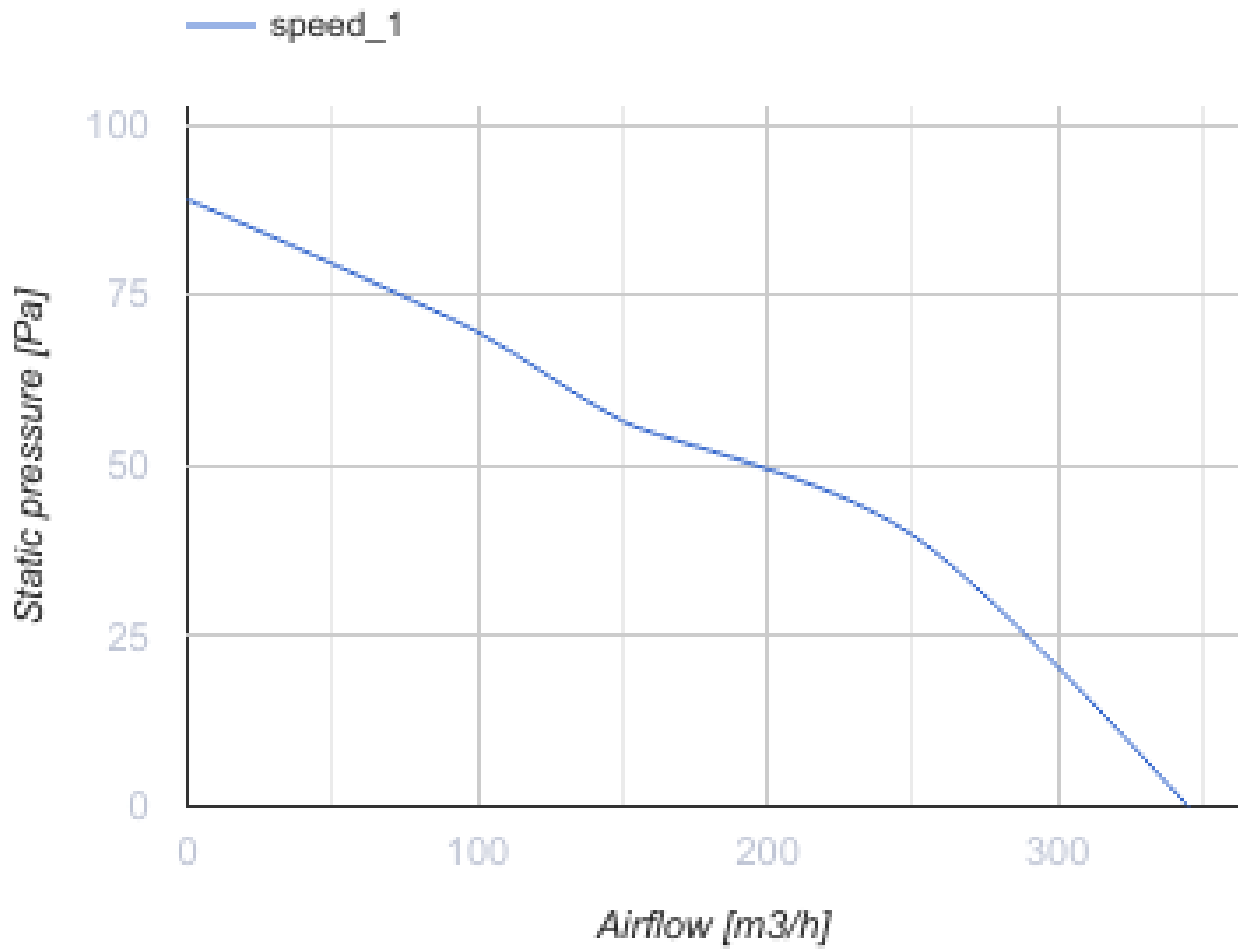


### Dimensions

<b>∅ D</b>	<b>B</b>	<b>H</b>	<b>L1</b>	<b>L2</b>
150	212	195	66	60



## Ecodesign

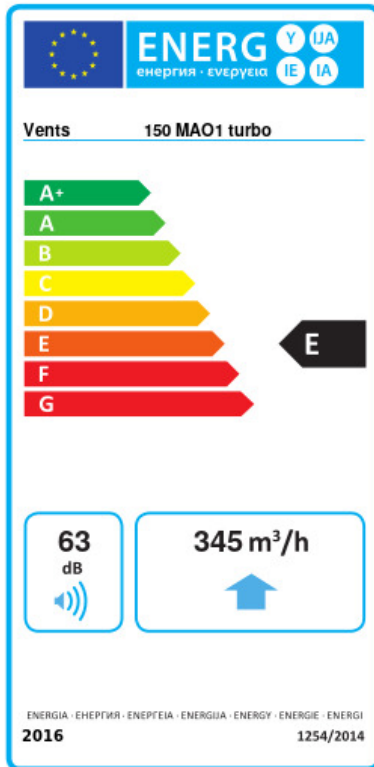

Trademark	Vents					
Model	150 MAO1 turbo					
Specific energy consumption (SEC) (kWh/(m <sup>2</sup> /a))	Cold		Average		Warm	
	-33.6	B	-17.2	E	-7.8	F
Type of ventilation unit	Unidirectional					
Type of drive installed	Multi-speed					
Type of heat recovery system	None					
Maximum flow rate (m <sup>3</sup> /h)	345					
Electric power input (W)	29					
Reference flow rate (m <sup>3</sup> /s)	0.067					
Specific power input (SPI) (W/(m <sup>3</sup> /h))	0.054					
Control typology	Manual control					
Maximum external leakage rates (%)	2.7					
Airflow sensitivity at +20 Pa and -20 Pa (%)	0.15					
The indoor/outdoor air tightness (m <sup>3</sup> /h)	1					
Sound power level (dB(A))	63					
Declared typology	RVU UVU					
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	3355		1715		776	