

# 150 VKO 12




Axial inline fans, for exhaust or supply ventilation

- Maximum airflow: 266
- Sound pressure level LpA at 3 m: 39
- Motor type: AC
- Casing material: Polypropylene/Thermoplastic elastomer


	<b>Unit of measurement</b>	<b>150 VKO 12</b>
Connected air duct size	mm	150
Speed	-	1
Minimum supply voltage	V	12
Maximum supply voltage	V	12
Power supply frequency	Hz	50
Rated power	W	29
Unit current	A	2
Maximum airflow	m³/h	266
Sound pressure level LpA at 3 m	dB(A)	39
Weight	kg	0.76
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ingress protection rating	-	IPX4

## Dimensions

<b>ØD</b>	<b>ØD1</b>	<b>L</b>	<b>L1</b>
150	154	108	46

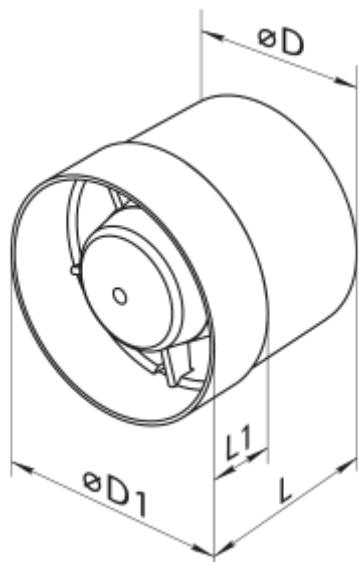

## Ecodesign

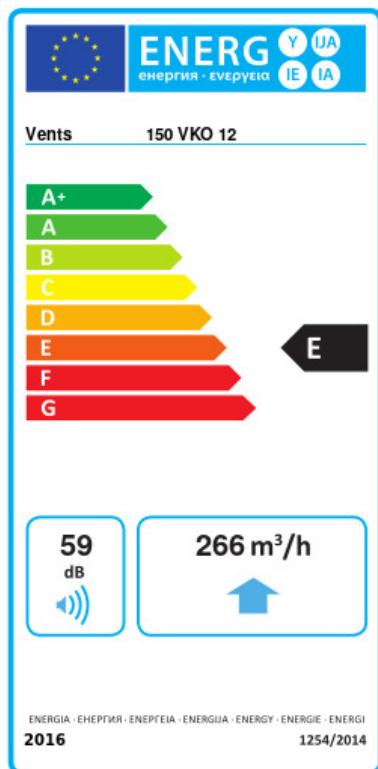

Trademark	Vents		
Model	150 VKO 12		
Specific energy consumption (SEC) (kWh/(m <sup>2</sup> /a))	-32	B	-15 E -6 F
Type of ventilation unit	Unidirectional		
Type of drive installed	Multi-speed		
Type of heat recovery system	None		
Maximum flow rate (m <sup>3</sup> /h)	266		
Electric power input (W)	24		
Reference flow rate (m <sup>3</sup> /s)	0.052		
Specific power input (SPI) (W/(m <sup>3</sup> /h))	0.058		
Control typology	Manual control		
Maximum external leakage rates (%)	2.7		
Declared typology	RVU UVU		
Sound power level (dB(A))	59		
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm
	100	100	100
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm
	3400	1700	800