


# AirVENTS RP 2500

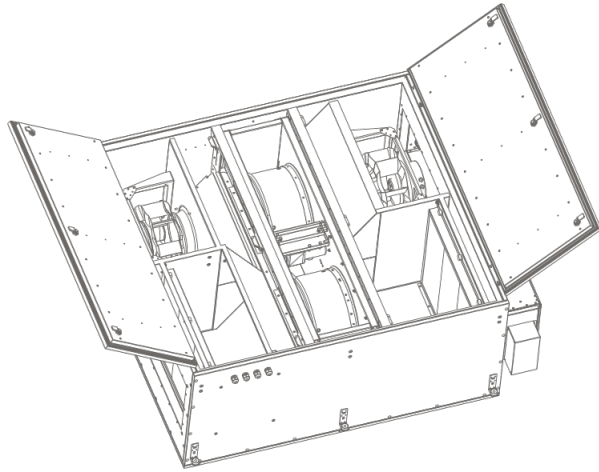

Premium commercial suspended air handling units with a rotary heat exchanger

- Maximum airflow: 2500
- Sound pressure level LpA at 3 m: 43
- Heat exchanger type: Rotary
- Extract filter: F7
- Supply filter: F7
- Sound insulation
- Motor type: EC
- Casing material: Aluzinc steel

	Unit of measurement	AirVENTS RP 2500
Phases	-	1
Minimum supply voltage	V	200
Maximum supply voltage	V	277
Power supply frequency	Hz	50/60
Rated power	W	2x740
Unit current	A	3.75
Maximum airflow	m <sup>3</sup> /h	2500
Sound pressure level LpA at 3 m	dB(A)	43
Heat exchanger type	-	Rotary
Heat exchanger material	-	Aluminum
Weight	kg	290
Extract filter	-	F7
Supply filter	-	F7
Transported air temperature (max)	°C	122
Transported air temperature (min)	°C	-31
Ambient air temperature min	°C	-35
Ambient air temperature max	°C	50
Ingress protection rating	-	IP34
Ingress protection rating of the drive	-	IP54

## Dimensions

L	W	H	S	H1	E2	S1	E1
1400	1416	628	501	300	171	505	360

