

## AOW 30



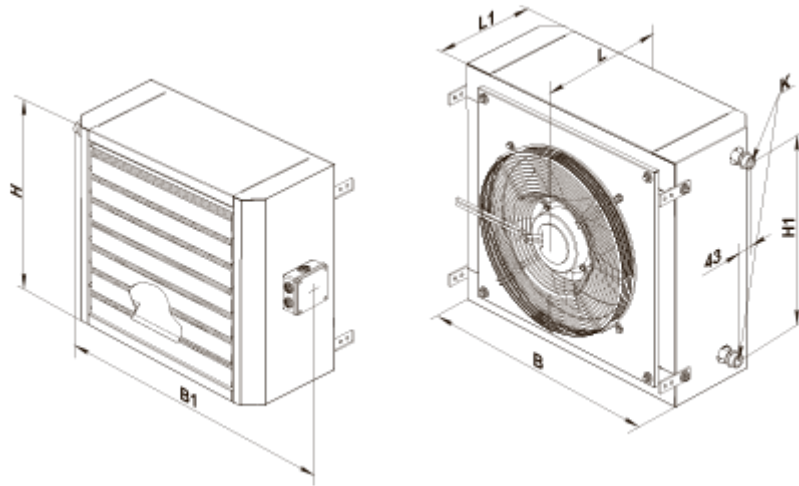
Air unit with the water heat exchanger for arrangement of cost-saving and efficient air heating and cooling in various premises

- Maximum airflow: 3000
- Sound pressure level LpA at 3 m: 55
- Motor type: AC
- Casing material: Coated steel

|                                 | Unit of measurement | AOW 30 |
|---------------------------------|---------------------|--------|
| Phases                          | -                   | 1      |
| Minimum supply voltage          | V                   | 230    |
| Maximum supply voltage          | V                   | 230    |
| Power supply frequency          | Hz                  | 50     |
| Rated power                     | W                   | 191    |
| Unit current                    | A                   | 0.85   |
| Maximum airflow                 | m <sup>3</sup> /h   | 3000   |
| Sound pressure level LpA at 3 m | dB(A)               | 55     |
| Weight                          | kg                  | 40     |
| Ingress protection rating       | -                   | IP44   |




### Dimensions

| B   | B1  | H   | H1  | L   | L1  | K      |
|-----|-----|-----|-----|-----|-----|--------|
| 680 | 785 | 655 | 518 | 360 | 286 | G 3/4" |







## Accessories

### Other accessories

| Name      | Photo   | Description       |
|-----------|---|-------------------|
| UWT-1E    |    | Control unit      |
| MKP-AOW   |  | Mounting angles   |
| MK-AOW 30 |  | Mounting brackets |

### Temperature regulators

| Name                       | Photo   | Description           |
|----------------------------|---|-----------------------|
| <a href="#">TST-1-300</a>  |  | Temperature regulator |
| <a href="#">TSTD-1-300</a> |  | Temperature regulator |
| <a href="#">RTS-1-400</a>  |  | Temperature regulator |
| <a href="#">RTSD-1-400</a> |  | Temperature regulator |