
AV06 UVU 8000

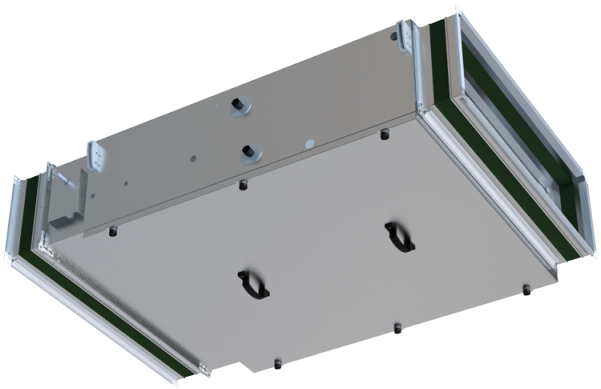

Unidirectional ventilation units

- Sound pressure level LpA at 3 m: 35
- Supply filter: COARSE 90% (ISO 16890)-G4 (EN779)
- Sound-insulated casing
- Reheater: Optional
- BMS protocol: Bacnet, ModBus
- Casing material: Aluzinc

	Unit of measurement	AV06 UVU 8000
Casing performance	-	40 mm, T3/TB4
Connected air duct size	mm	1540x560
Phases	-	3
Minimum supply voltage	V	380
Maximum supply voltage	V	480
Power supply frequency	Hz	50/60
Rated power supply fan	W	2x1100
Unit current (without electric heaters)	A	3.62
Maximum airflow	m^3/h	9400
Maximum airflow at ESP 200 Pa	m^3/h	9200
Sound pressure level LpA at 3 m	dB(A)	35
Weight	kg	220
Supply filter	-	COARSE 90% (ISO 16890)-G4 (EN779)
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25
Ambient air temperature min	°C	-40
Ambient air temperature max	°C	60
Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP54

Dimensions