



Boost-I 200 EC



Mixed-type duct fans with EC motors in casing with noise and heat insulation


- Maximum airflow: 1210
- Sound pressure level LpA at 3 m: 47
- Sound insulation
- Motor type: EC
- Impeller type: Mixed-flow
- Casing material: Galvanized steel
- Installation in any position

	Unit of measurement	Boost-I 200 EC
Connected air duct size	mm	200
Speed	-	1
Phases	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	121
Unit current	A	0.96
Maximum airflow	m ³ /h	1210
rotation speed at 50hz	-	3100
Sound pressure level LpA at 3 m	dB(A)	47
Weight	kg	8.2
Transported air temperature (max)	°C	55
Transported air temperature (min)	°C	-25
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP44

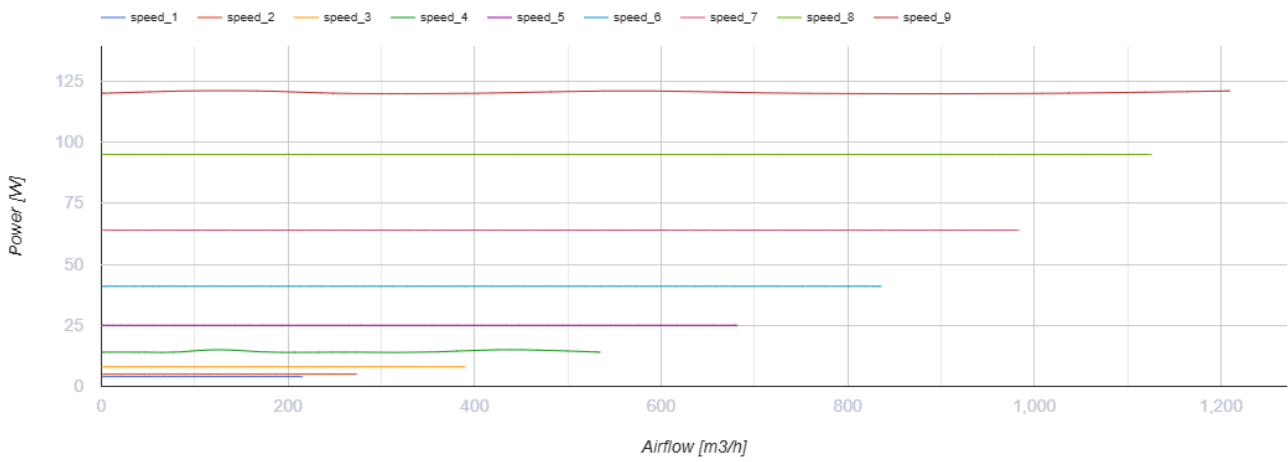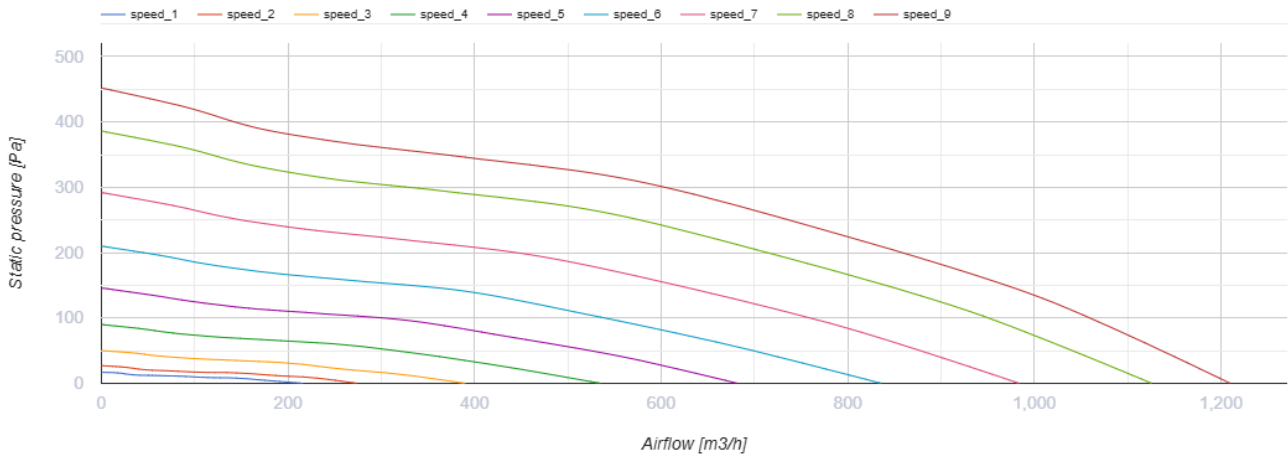





Dimensions

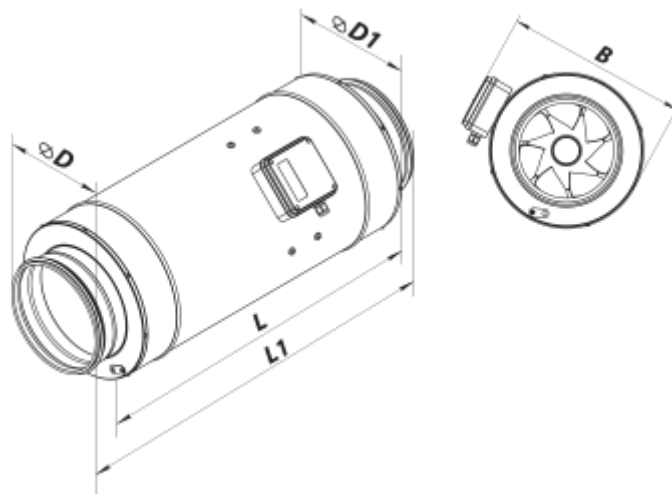ØD	ØD1	L	L1	B
199	281	601	739	339



Accessories




For round ducts

Name	Photo	Description
FBK 200-7		Pocket filter
FBK 200-5		Pocket filter
FBK 200-4		Pocket filter
FB 200		Panel filters



Speed controllers

Name	Photo	Description
R-1/010		Speed controller for EC motors




For round ducts

Name	Photo	Description
KR 200		Air damper for air flow control in round air ducts
KOMu 200		Spring-loaded backdraft damper for round ducts
KOM 200		Spring-loaded backdraft damper for round ducts






Water heaters

Name	Photo	Description
NKV 200-2		Duct water heaters are designed for heating of supply air in round ventilation systems. They can be also applied in supply or supply and exhaust ventilating units
NKV 200-4		Duct water heaters are designed for heating of supply air in round ventilation systems. They can be also applied in supply or supply and exhaust ventilating units

For round ducts

Name	Photo	Description
SR 200/1200		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SR 200/900		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SR 200/600		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems

Electrical heaters

Name	Photo	Description
NK 200-1,2-1		Duct electric heater
NK 200-1,7-1		Duct electric heater
NK 200-2,0-1		Duct electric heater
NK 200-2,4-1		Duct electric heater
NK 200-3,4-1		Duct electric heater

Ecodesign

Trademark	Vents
Model	Boost-I 200 EC
Type of drive installed	Integrated VSD
Type of heat recovery system	None
Nominal flow rate (m ³ /s)	0.211
Nominal external pressure (Pa)	241
Maximum external leakage rates (%)	2.7
Static efficiency (%)	43.2
Declared typology	NRVU UVU
Effective electric power input (kW)	0.12
Sound power level (dB(A))	62