


Boost-I 315 P




Mixed-flow inline fans in sound-insulated casings

- Maximum airflow: 2300
- Sound pressure level LpA at 3 m: 36
- Sound insulation
- Motor type: AC
- Control: Speed controller
- Impeller type: Mixed-flow
- Casing material: Galvanized steel
- Installation in any position


| | Unit of measurement | Boost-I 315 P | | |
|--|---------------------|---------------|------|------|
| Connected air duct size | mm | 315 | | |
| Speed | - | 3 | | |
| Phases | - | 1 | | |
| Minimum supply voltage | V | 230 | | |
| Maximum supply voltage | V | 230 | | |
| Power supply frequency | Hz | 50 | | |
| Rated power | W | 126 | 131 | 148 |
| Unit current | A | 0.60 | 0.58 | 0.66 |
| Maximum airflow | m ³ /h | 1913 | 2120 | 2300 |
| rotation speed at 50hz | - | 1350 | 1400 | 1470 |
| Sound pressure level LpA at 3 m | dB(A) | 33 | 34 | 36 |
| Weight | kg | 20.7 | | |
| Transported air temperature (max) | °C | 55 | | |
| Transported air temperature (min) | °C | -25 | | |
| Ambient air temperature min | °C | 1 | | |
| Ambient air temperature max | °C | 40 | | |
| Ingress protection rating | - | IPX4 | | |
| Ingress protection rating of the drive | - | IP20 | | |

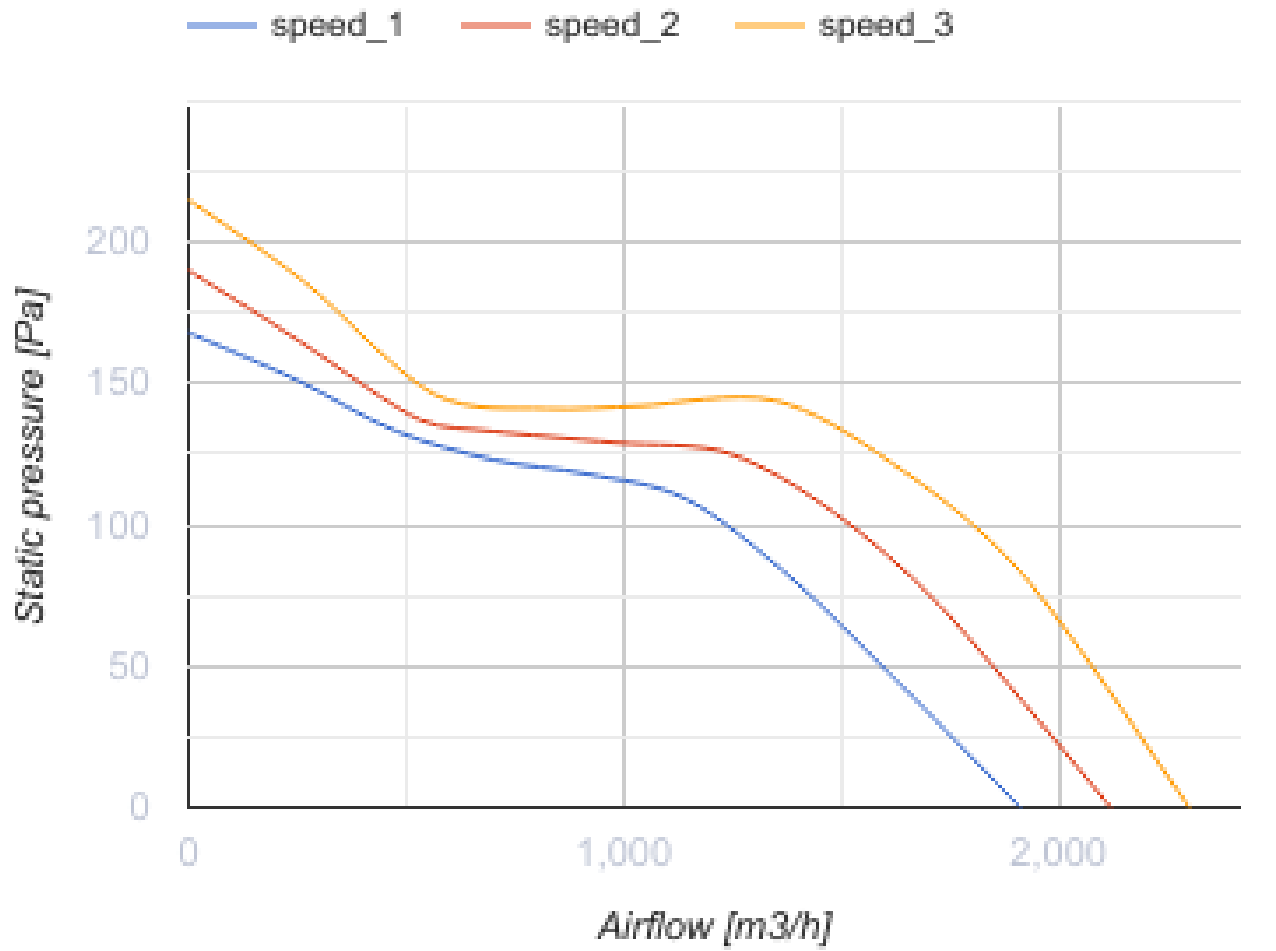

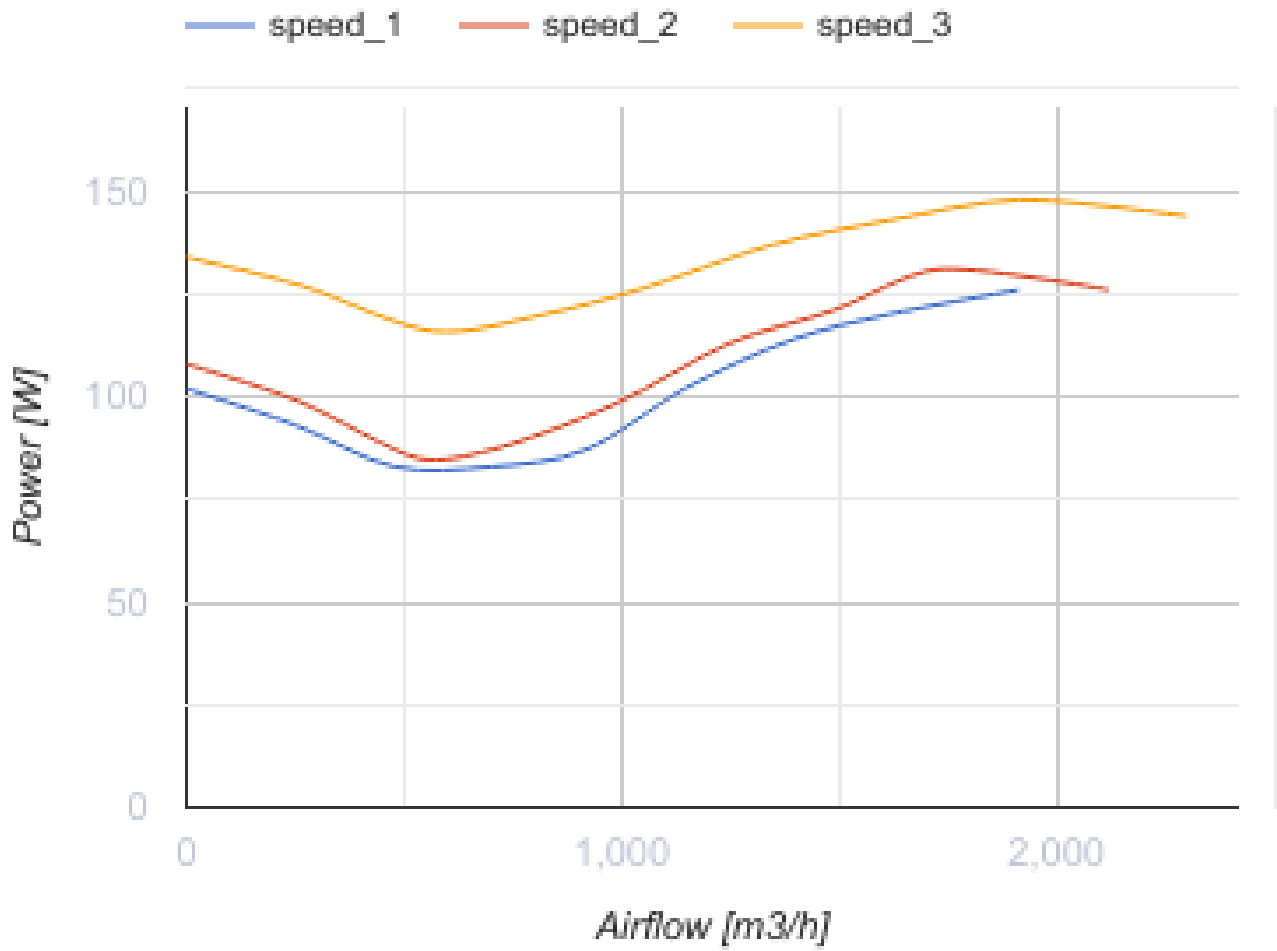




Dimensions
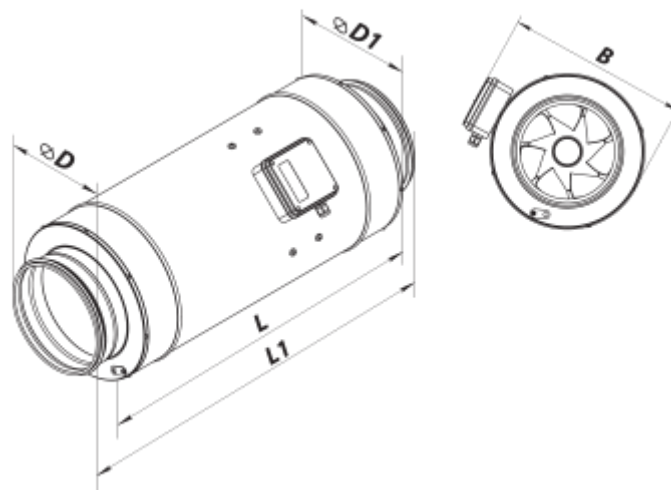
| $\varnothing D$ | $\varnothing D1$ | B | L | L1 |
|-----------------|------------------|-----|-----|-----|
| 314 | 412 | 468 | 601 | 739 |







Accessories




For round ducts

| Name | Photo | Description |
|-----------------------------|---|---|
| SR 315/600 |  | Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems |
| SR 315/900 |  | Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems |
| SR 315/1200 |  | Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems |

For round ducts



| Name | Photo | Description |
|---------------------------|---|---------------|
| FB 315 |  | Panel filters |
| FBK 315-4 |  | Pocket filter |
| FBK 315-5 |  | Pocket filter |
| FBK 315-7 |  | Pocket filter |

Electrical heaters




| Name | Photo | Description |
|------------------------------|---|----------------------|
| NK 315-1,2-1 |  | Duct electric heater |
| NK 315-2,0-1 |  | Duct electric heater |
| NK 315-2,4-1 |  | Duct electric heater |

Water heaters

| Name | Photo | Description |
|------|-------|-------------|
|------|-------|-------------|

| | | |
|---------------------------|---|--|
| NKV 315-2 |  | Duct water heaters are designed for heating of supply air in round ventilation systems. They can be also applied in supply or supply and exhaust ventilating units |
| NKV 315-4 |  | Duct water heaters are designed for heating of supply air in round ventilation systems. They can be also applied in supply or supply and exhaust ventilating units |




For round ducts

| Name | Photo | Description |
|--------------------------|---|--|
| KOM 315 |  | Spring-loaded backdraft damper for round ducts |
| KOMu 315 |  | Spring-loaded backdraft damper for round ducts |
| KR 315 |  | Air damper for air flow control in round air ducts |

Speed control switches

| Name | Photo | Description |
|--------------------------|---|-------------|
| P3-1-300 |  | Switch |

Speed controllers

| Name | Photo | Description |
|---------------------------|---|---|
| RS-1,5-PS |  | Used in ventilation systems for switching on/off and speed control of single-phase fan motors with voltage control |
| RS-1-400 |  | Speed controller |
| RS-3,0-T |  | Applied in ventilation systems for speed switching ON/OFF and speed control of single-phase power-controlled motors |