

CBF 150 DC




- Maximum airflow: 254
- Sound pressure level LpA at 3 m: 29
- Motor type: DC
- Control: Built-in control panel
- Casing material: Galvanized steel
- Backdraft protection: Backdraft damper
- Timer: Turn off timer

	Unit of measurement	CBF 150 DC
Connected air duct size	mm	150
Phases	-	1
Minimum supply voltage	V	120
Maximum supply voltage	V	240
Power supply frequency	Hz	50/60
Rated power	W	26
Unit current	A	0.24
Maximum airflow	m ³ /h	254
Sound pressure level LpA at 3 m	dB(A)	29
Weight	kg	5.1
ambient air temperature min	°C	1
ambient air temperature max	°C	40
Ingress protection rating	-	IPX4

Dimensions

D	L1	A	B	C	E	H	h
149	50	330	258	260	395	188	18

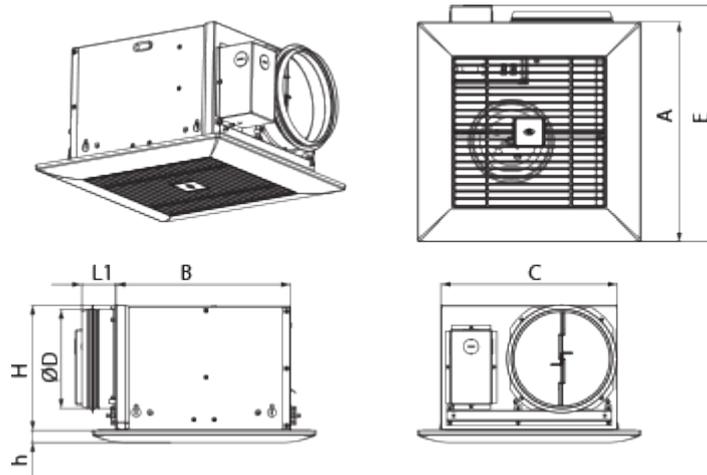

Accessories

Speed control switches

Name	Photo	Description
P2-10		Turning fan on/off and speed switching for multispeed fans

Sensors

Name	Photo	Description
TH CBE		Humidity sensor

Other accessories

Name	Photo	Description
MV 152 bVs N		Supply and exhaust metal hoods
MV 152 V ASA		Supply and exhaust hoods

Other accessories

Name	Photo	Description
Polyvent 660		Flexible PVC film non-insulated air ducts with steel wire frame (65 µm)

Other accessories

Name	Photo	Description
------	-------	-------------

[CB 60-165](#)

The clamps are designed for quick and reliable mounting and connection of various round ventilation system components. Clamps are the stainless steel quick-release clamps equipped with a stainless steel swing screw