


CBF LP 110 DC Light TP

Ceiling bathroom fans with integrated LED-light

- Maximum airflow: 187
- Sound pressure level LpA at 3 m: 25
- Lighting
- Motor type: DC
- Control: Built-in control panel
- Casing material: Galvanized steel
- Backdraft protection: Backdraft damper
- Motion sensor
- Timer: Turn off timer, Turn on timer

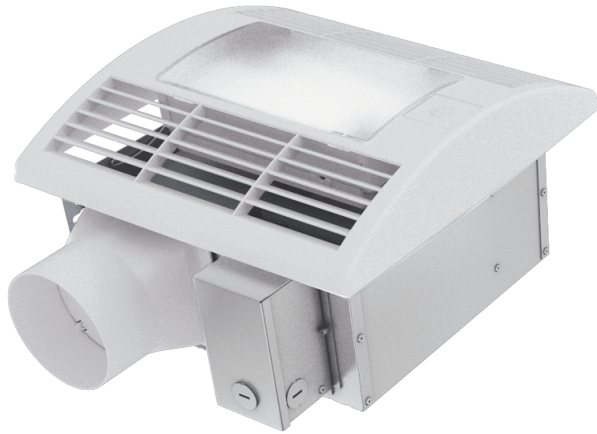

| | Unit of measurement | CBF LP 110 DC Light TP |
|---------------------------------|---------------------|------------------------|
| Connected air duct size | mm | 100 |
| Phases | - | 1 |
| Minimum supply voltage | V | 120 |
| Maximum supply voltage | V | 240 |
| Power supply frequency | Hz | 50/60 |
| Rated power | W | 19 |
| Unit current | A | 0.18 (0.3) |
| Maximum airflow | m ³ /h | 187 |
| Sound pressure level LpA at 3 m | dB(A) | 25 |
| Weight | kg | 5.3 |
| Ambient air temperature min | °C | 1 |
| Ambient air temperature max | °C | 40 |
| Ingress protection rating | - | IPX4 |




Dimensions

| d | L1 | L2 | A | B | C | E | H | h | G |
|----|-----|------|-----|-----|-----|-----|-----|----|---------|
| 98 | 100 | 40.5 | 330 | 278 | 255 | 395 | 134 | 57 | max 620 |



Accessories




Speed control switches

| Name | Photo | Description |
|-----------------------|---|--|
| P2-10 |  | Turning fan on/off and speed switching for multispeed fans |


Other accessories

| Name | Photo | Description |
|-------------------------------|---|--------------------------------|
| MVM 102 bVs N |  | Supply and exhaust metal hoods |


Other accessories

| Name | Photo | Description |
|---------------|---|---|
| MV 102 V ASA |  | Supply and exhaust hoods |
| TP CBF |  | Motion sensor |
| CH-PLC-10WG23 |  | 10 W LED light with colour temperature 3000 K |


Flexible ducts

| Name | Photo | Description |
|------------------------------|---|---|
| Polyvent 660 |  | Flexible PVC film non-insulated air ducts with steel wire frame (65 µm) |

Fittings

| Name | Photo | Description |
|---------------------------|---|--|
| CB 60-110 |  | The clamps are designed for quick and reliable mounting and connection of various round ventilation system components. Clamps are the stainless steel quick-release clamps equipped with a stainless steel swing screw |

Ecodesign

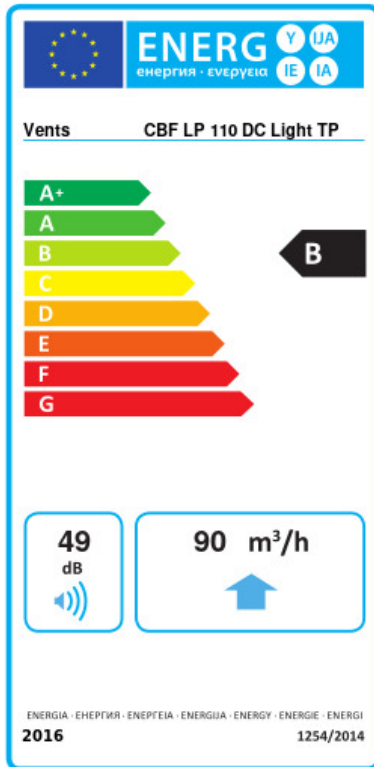

| | | | | | | |
|---|------------------------|----|---------|---|-------|---|
| Trademark | Vents | | | | | |
| Model | CBF LP 110 DC Light TP | | | | | |
| Specific energy consumption (SEC) (kWh/(m ² /a)) | Cold | | Average | | Warm | |
| | -53.9 | A+ | -26.9 | B | -11.4 | E |
| Type of ventilation unit | Unidirectional | | | | | |
| Type of drive installed | Variable speed | | | | | |
| Type of heat recovery system | None | | | | | |
| Maximum flow rate (m ³ /h) | 90 | | | | | |
| Electric power input (W) | 14 | | | | | |
| Reference flow rate (m ³ /s) | 0.037 | | | | | |
| Reference pressure difference (Pa) | 50 | | | | | |
| Specific power input (SPI) (W/(m ³ /h)) | 0.109 | | | | | |
| Control typology | Local demand control | | | | | |
| Maximum external leakage rates (%) | 2.7 | | | | | |
| Declared typology | RVU UVU | | | | | |
| Sound power level (dB(A)) | 49 | | | | | |
| The annual electricity consumption (AEC) (kWh/a) | Cold | | Average | | Warm | |
| | 58 | | 58 | | 58 | |
| The annual heating saved (AHS) (kWh/a) | Cold | | Average | | Warm | |
| | 5536 | | 2830 | | 1280 | |