

CBF LP 200 T




Centrifugal ceiling fans

- Maximum airflow: 210
- Sound pressure level LpA at 3 m: 27
- Motor type: AC
- Control: Built-in control panel
- Casing material: Galvanized steel
- Backdraft protection: Backdraft damper
- Timer: Turn off timer, Turn on timer

	Unit of measurement	CBF LP 200 T	
Connected air duct size	mm	100	
Phases	-	1	
Minimum supply voltage	V	220	
Maximum supply voltage	V	240	
Power supply frequency	Hz	50/60	
Rated power	W	20	29
Unit current	A	0.1	0.13
Maximum airflow	m ³ /h	130	210
Sound pressure level LpA at 3 m	dB(A)	24	27
Weight	kg	5.3	
ambient air temperature min	°C	1	
ambient air temperature max	°C	40	
Ingress protection rating	-	IPX4	

Dimensions

d	L1	L2	A	B	C	E	H	h	G
98	100	40.5	330	278	255	395	134	18	max 620

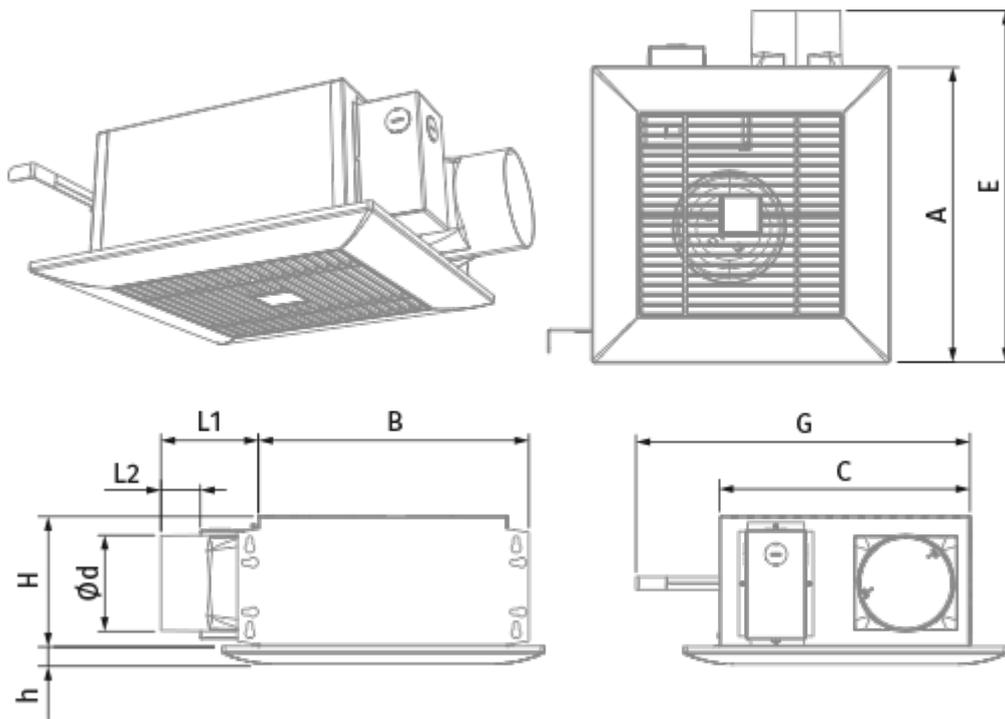

Accessories

Speed control switches

Name	Photo	Description
P2-10		Turning fan on/off and speed switching for multispeed fans

Sensors

Name	Photo	Description
TH CBF		Humidity sensor

Other accessories

Name	Photo	Description
MV 102 bVs N		Supply and exhaust metal hoods
MV 102 V ASA		Supply and exhaust hoods

Other accessories

Name	Photo	Description
------	-------	-------------

Polyvent 660		Flexible PVC film non-insulated air ducts with steel wire frame (65 µm)
------------------------------	---	---

Other accessories

Name	Photo	Description
CB 60-110		The clamps are designed for quick and reliable mounting and connection of various round ventilation system components. Clamps are the stainless steel quick-release clamps equipped with a stainless steel swing screw