

DVUT 500 PB EC A21 V.2


Suspension-mounted single-room air handling units in a heat- and sound insulated casing




- Maximum airflow: 510
- Sound pressure level LpA at 3 m: 34
- Sound pressure level LpA at 1 m: 44
- Heat exchanger type: Counter flow
- Extract filter: ISO Coarse >60% (G4)
- Supply filter: ISO ePM1 60% (F7)
- Sound insulation
- Motor type: EC
- Bypass: Auto
- BMS protocol: ModBus
- Control: Smartphone
- Casing material: Galvanized steel
- Humidity sensor: Optional
- CO2 sensor: Optional
- VOC sensor: Optional
- Temperature sensor: Built-in

	Unit of measurement	DVUT 500 PB EC A21 V.2
Connected air duct size	mm	250
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	143
Unit current	A	1.1
Maximum airflow	m ³ /h	510
Sound pressure level LpA at 3 m	dB(A)	34
Sound pressure level LpA at 1 m	dB(A)	44
Heat recovery efficiency, max	%	96
Heat exchanger type	-	Counter flow
Heat exchanger material	-	Polystyrene
Weight	kg	126
Extract filter	-	ISO Coarse >60% (G4)
Supply filter	-	ISO ePM1 60% (F7)
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40


Ambient air humidity max	%	60
Ingress protection rating	-	IP20
Ingress protection rating of the drive	-	IP44

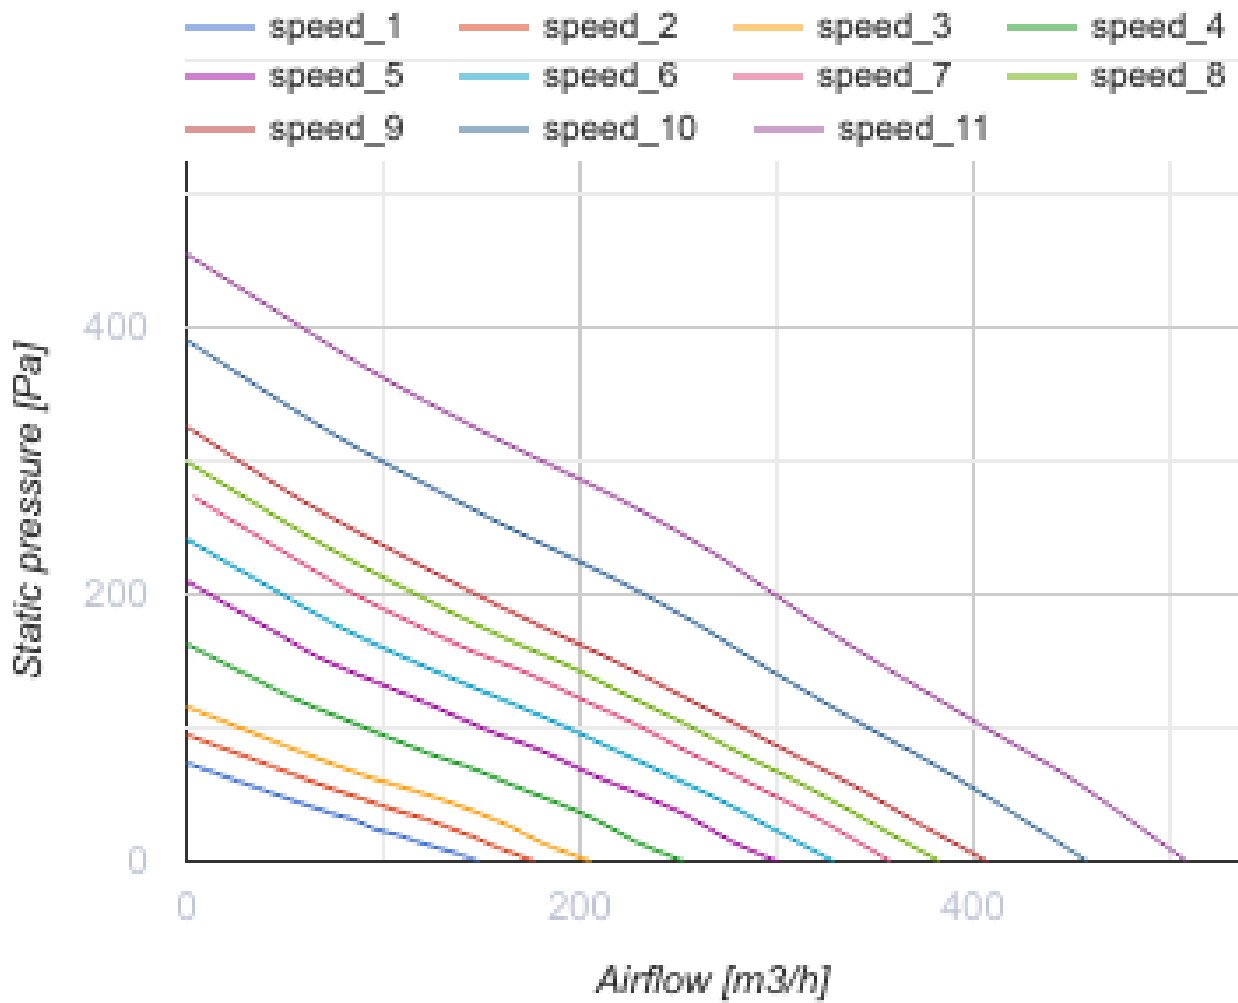

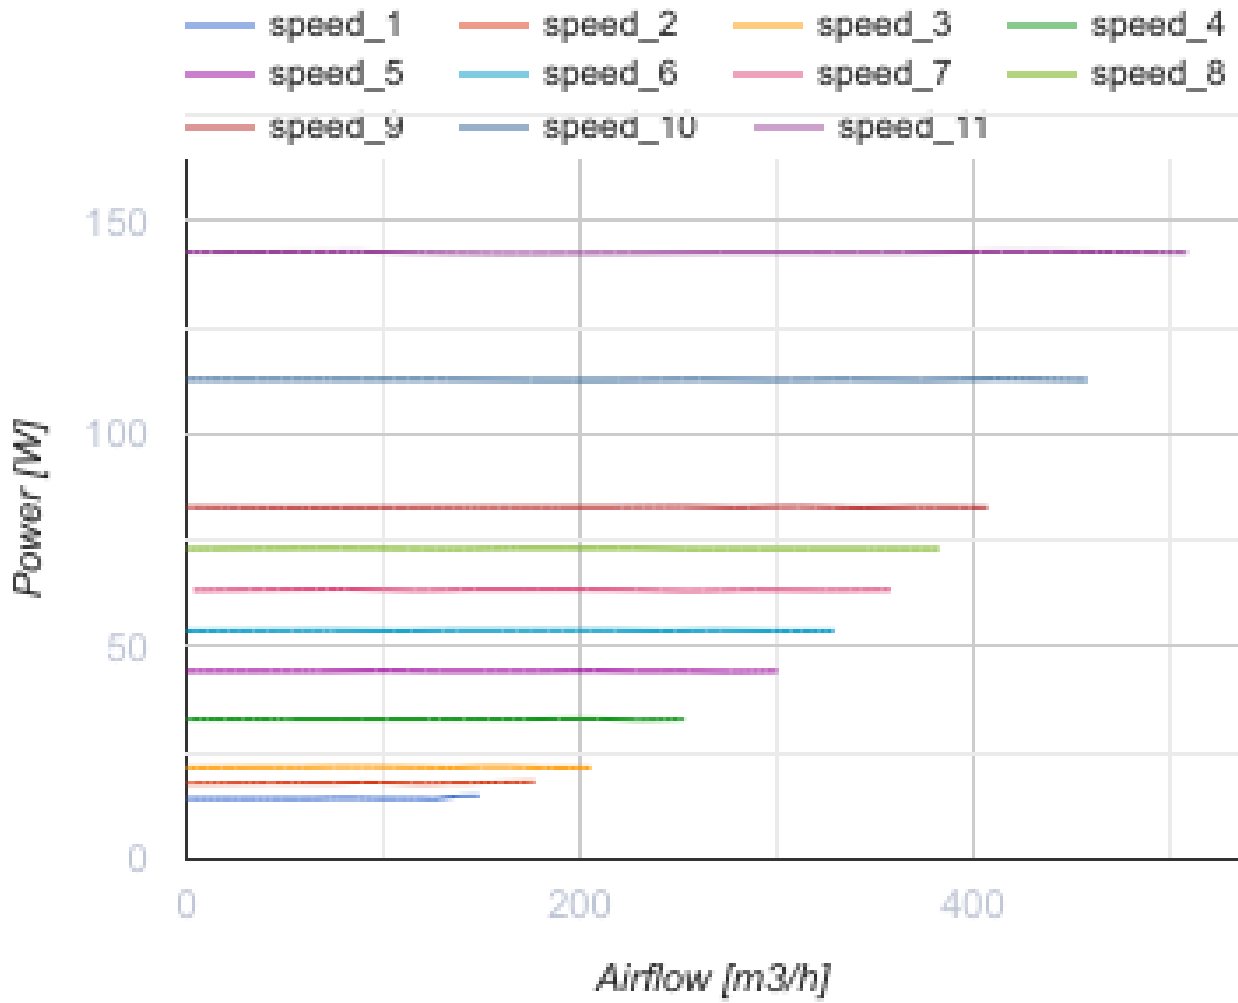





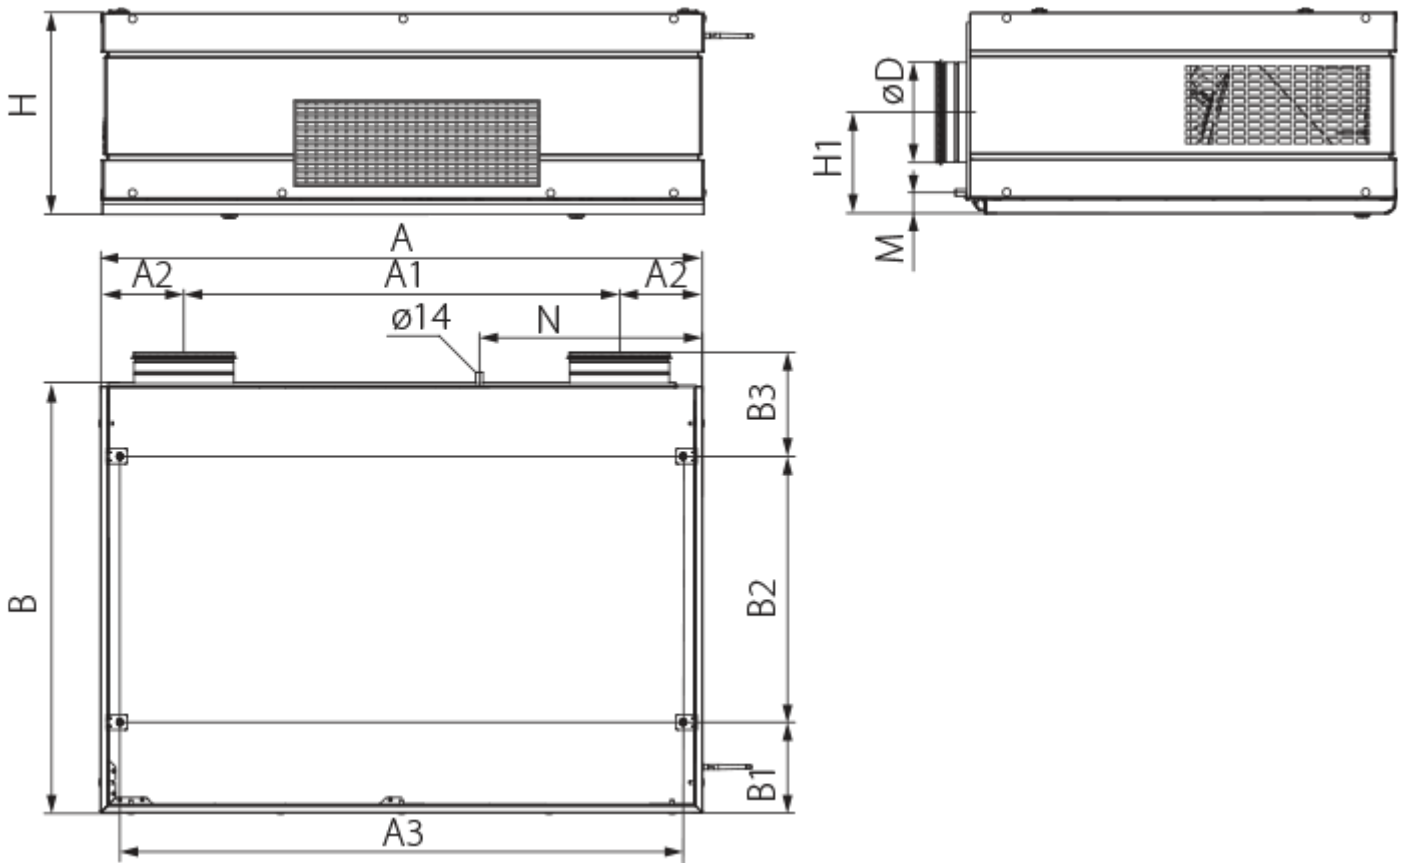

Dimensions

ØD	A	A1	A2	A3	B	B1	B2	B3	H	H1	N	M
250	1500	1135	186	1422	850	181	530	207	458	221	504	41





Accessories

Sensors

Name	Photo	Description
CO2-1		CO2 sensors
CO2-2		CO2 sensors
HR-S		Electro-mechanical humidistats
HV2		Humidity sensor
DPWC11200		Humidity sensor
CO2-3		CO2 sensor




VOC sensors

Name	Photo	Description
DPWQ30600		VOC sensors
DPWQ40200		CO2 sensor

Metal

Name	Photo	Description
MVMA 250 bVn Al		Supply and exhaust metal grille

Condensation drainage

Name	Photo	Description
SH-32		The hydraulic U-trap for condensate drainage from heat exchangers and coolers in ventilation and air conditioning systems
DN-2		The drain pump provides extraction and discharge of condensate in ventilation systems
DN-2-DVUT P		Drain pump kit box