

Enave 181 P A14



Heat recovery air handling unit in sound- and heat-insulated casing made of expanded polypropylene


- Maximum airflow: 181
- Sound pressure level LpA at 3 m: 29
- Heat exchanger type: Counter flow
- Extract filter: Coarse > 60 % (G4)
- Supply filter: Coarse > 60 % (G4) (option ePM1 60 % (F7))
- Sound insulation
- Motor type: EC
- Bypass: Manual
- Control: Wired control panel
- Casing material: EPP
- Humidity sensor: Optional
- CO2 sensor: Optional

| | Unit of measurement | Enave 181 P A14 |
|-----------------------------------|---------------------|--|
| Connected air duct size | mm | 160 |
| Phases | - | 1 |
| Minimum supply voltage | V | 230 |
| Maximum supply voltage | V | 230 |
| Power supply frequency | Hz | 50/60 |
| Rated power | W | 53 |
| Unit current | A | 0.49 |
| Maximum airflow | m ³ /h | 181 |
| Sound pressure level LpA at 3 m | dB(A) | 29 |
| Heat recovery efficiency, max | % | 91 |
| Heat exchanger type | - | Counter flow |
| Heat exchanger material | - | Polystyrene |
| Weight | kg | 12 |
| Extract filter | - | Coarse > 60 % (G4) |
| Supply filter | - | Coarse > 60 % (G4) (option ePM1 60 % (F7)) |
| Transported air temperature (max) | °C | 45 |
| Ambient air temperature min | °C | 1 |
| Ambient air temperature max | °C | 40 |
| Ambient air humidity max | % | 60 |
| Ingress protection rating | - | IP22 |

| | | |
|--|---|------|
| Ingress protection rating of the drive | - | IP44 |
|--|---|------|



Dimensions
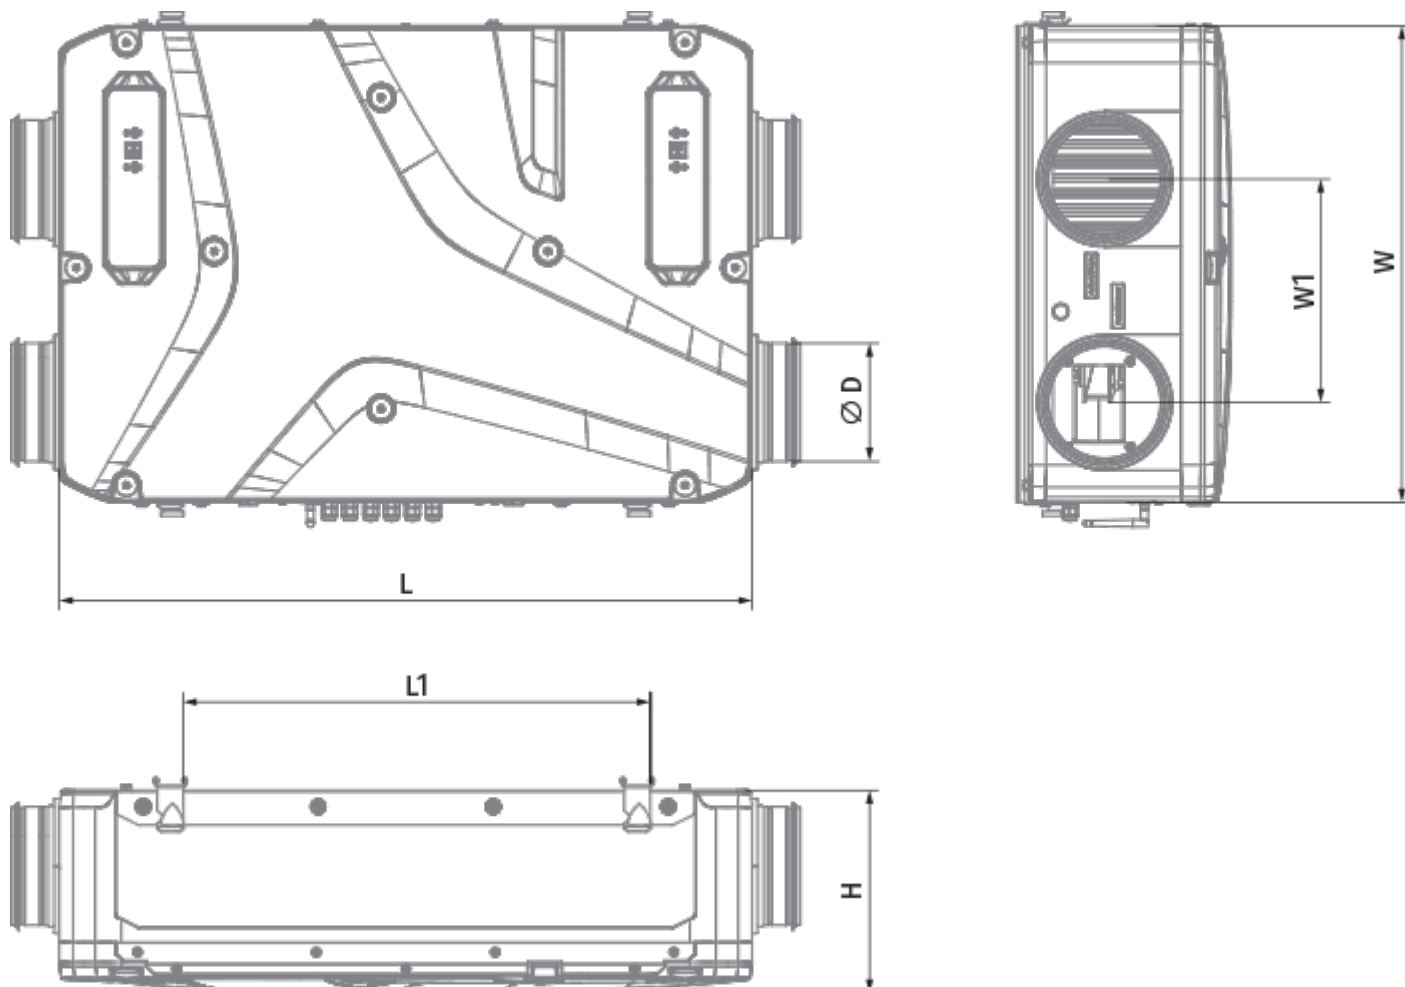
| H | W | L | D | W1 | L1 |
|-----|-----|-----|-----|-----|-----|
| 272 | 640 | 930 | 160 | 300 | 627 |



Accessories

Other accessories






| Name | Photo | Description |
|-----------------------------|---|-----------------|
| SF 205x200x48 Coarse 90% G4 |  | Panel filter G4 |
| SF 205x200x48 ePM1 60% F7 |  | F7 panel filter |

Cooker Hoods


| Name | Photo | Description |
|------|-------|-------------|
|------|-------|-------------|

| | | |
|--------------------------------|---|------------------|
| PD-Enave 181 P |  | Decorative panel |
|--------------------------------|---|------------------|




Sensors

| Name | Photo | Description |
|-----------------------|--|--------------------------------|
| HV2 |  | Humidity sensor |
| CO2-3 |  | CO2 sensor |
| CO2-1 |  | CO2 sensors |
| CO2-2 |  | CO2 sensors |
| HR-S |  | Electro-mechanical humidistats |

Condensation drainage


| Name | Photo | Description |
|-----------------------|---|---|
| SH-32 |  | The hydraulic U-trap for condensate drainage from heat exchangers and coolers in ventilation and air conditioning systems |

For round ducts


| Name | Photo | Description |
|-----------------------------|---|---|
| SR 160/600 |  | Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems |
| SR 160/900 |  | Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems |
| SR 160/1200 |  | Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems |

For round ducts

| Name | Photo | Description |
|------|-------|-------------|
|------|-------|-------------|

| | | |
|-------------------------|---|--|
| KRV 160 |  | Air damper for air flow cut-off in round air ducts |
|-------------------------|---|--|


Electric actuators

| Name | Photo | Description |
|------------------------------|---|--|
| Belimo TF230 |  | The actuators are designed for controlling air dampers with cross section up to 0.4 m ² performing protection functions |

Flanges

| Name | Photo | Description |
|--------------------------------|---|------------------|
| PD-Enave 181 P |  | Decorative panel |

Ecodesign

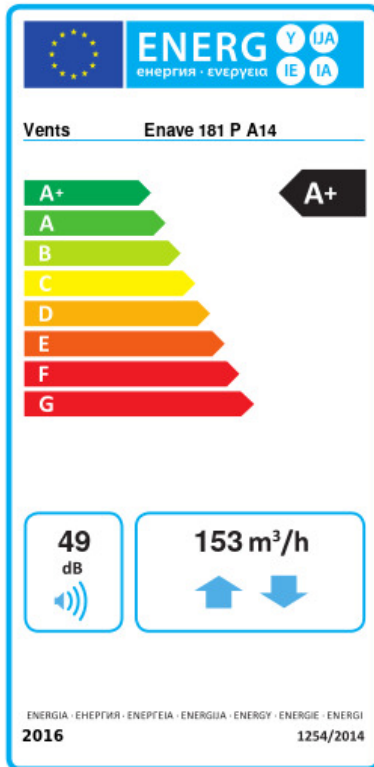

| | | | | | | |
|---|----------------------|----|---------|----|------|---|
| Trademark | Vents | | | | | |
| Model | Enave 181 P A14 | | | | | |
| Specific energy consumption (SEC) (kWh/(m ² /a)) | Cold | | Average | | Warm | |
| | 82.1 | A+ | 43.2 | A+ | 18.2 | E |
| Type of ventilation unit | Bidirectional | | | | | |
| Type of drive installed | Variable speed | | | | | |
| Type of heat recovery system | Recuperative | | | | | |
| Thermal efficiency of heat recovery (%) | 87 | | | | | |
| Maximum flow rate (m ³ /h) | 153 | | | | | |
| Electric power input (W) | 53 | | | | | |
| Reference flow rate (m ³ /s) | 0.03 | | | | | |
| Reference pressure difference (Pa) | 50 | | | | | |
| Specific power input (SPI) (W/(m ³ /h)) | 0.204 | | | | | |
| Control typology | Local demand control | | | | | |
| Maximum internal leakage rates (%) | 2.7 | | | | | |
| Maximum external leakage rates (%) | 2.7 | | | | | |
| Declared typology | RVU BVU | | | | | |
| Sound power level (dB(A)) | 49 | | | | | |
| The annual electricity consumption (AEC) (kWh/a) | Cold | | Average | | Warm | |
| | 690 | | 153 | | 108 | |
| The annual heating saved (AHS) (kWh/a) | Cold | | Average | | Warm | |
| | 9060 | | 4631 | | 2094 | |