

HBF 250 Square




Vents HBF is a series of designer ceiling-mounted centrifugal extract fans

- Maximum airflow: 482
- Sound pressure level LpA at 3 m: 36
- Backdraft protection: Backdraft damper


| | Unit of measurement | HBF 250 Square |
|---------------------------------|---------------------|----------------|
| Speed | - | 1 |
| Minimum supply voltage | V | 220 |
| Maximum supply voltage | V | 240 |
| Power supply frequency | Hz | 50 |
| Rated power | W | 57 |
| Unit current | A | 0.25 |
| Maximum airflow | m ³ /h | 482 |
| rotation speed at 50hz | - | 1085 |
| Sound pressure level LpA at 3 m | dB(A) | 36 |
| Ingress protection rating | - | IPX4 |

Dimensions

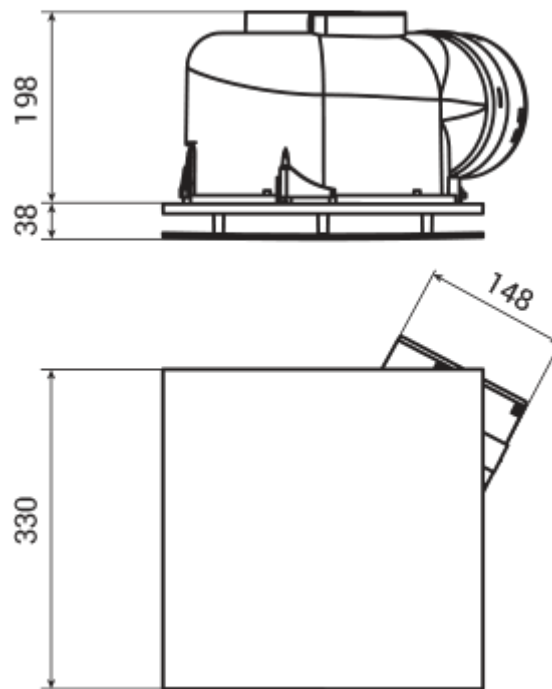

Accessories

Speed controllers

| Name | Photo | Description |
|--------------------------|---|--|
| RS-1-0,5 |  | Used in ventilation systems for switching on/off and speed control of single-phase fan motors with voltage control |

Other accessories

| Name | Photo | Description |
|--------------|---|--------------------------|
| MV 152 V ASA |  | Supply and exhaust hoods |

Plastic

| Name | Photo | Description |
|--------------------------|---|------------------------------------|
| MV 150 V |  | Supply and exhaust plastic grilles |