


KSA 100-2E




Centrifugal fans in heat-and sound-insulated casing

- Maximum airflow: 425
- Sound pressure level LpA at 3 m: 36.1
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal forward curved blades
- Casing material: Galvanized steel
- Installation in any position

| | Unit of measurement | KSA 100-2E |
|----------------------------------------|---------------------|------------|
| Connected air duct size | mm | 100 |
| Speed | - | 1 |
| Minimum supply voltage | V | 230 |
| Maximum supply voltage | V | 230 |
| Power supply frequency | Hz | 50 |
| Rated power | W | 130 |
| Unit current | A | 0.6 |
| Maximum airflow | m ³ /h | 425 |
| Sound pressure level LpA at 3 m | dB(A) | 36.1 |
| Weight | kg | 4.22 |
| Transported air temperature (max) | °C | 40 |
| Transported air temperature (min) | °C | -25 |
| Ingress protection rating | - | IPX2 |
| Ingress protection rating of the drive | - | IP44 |

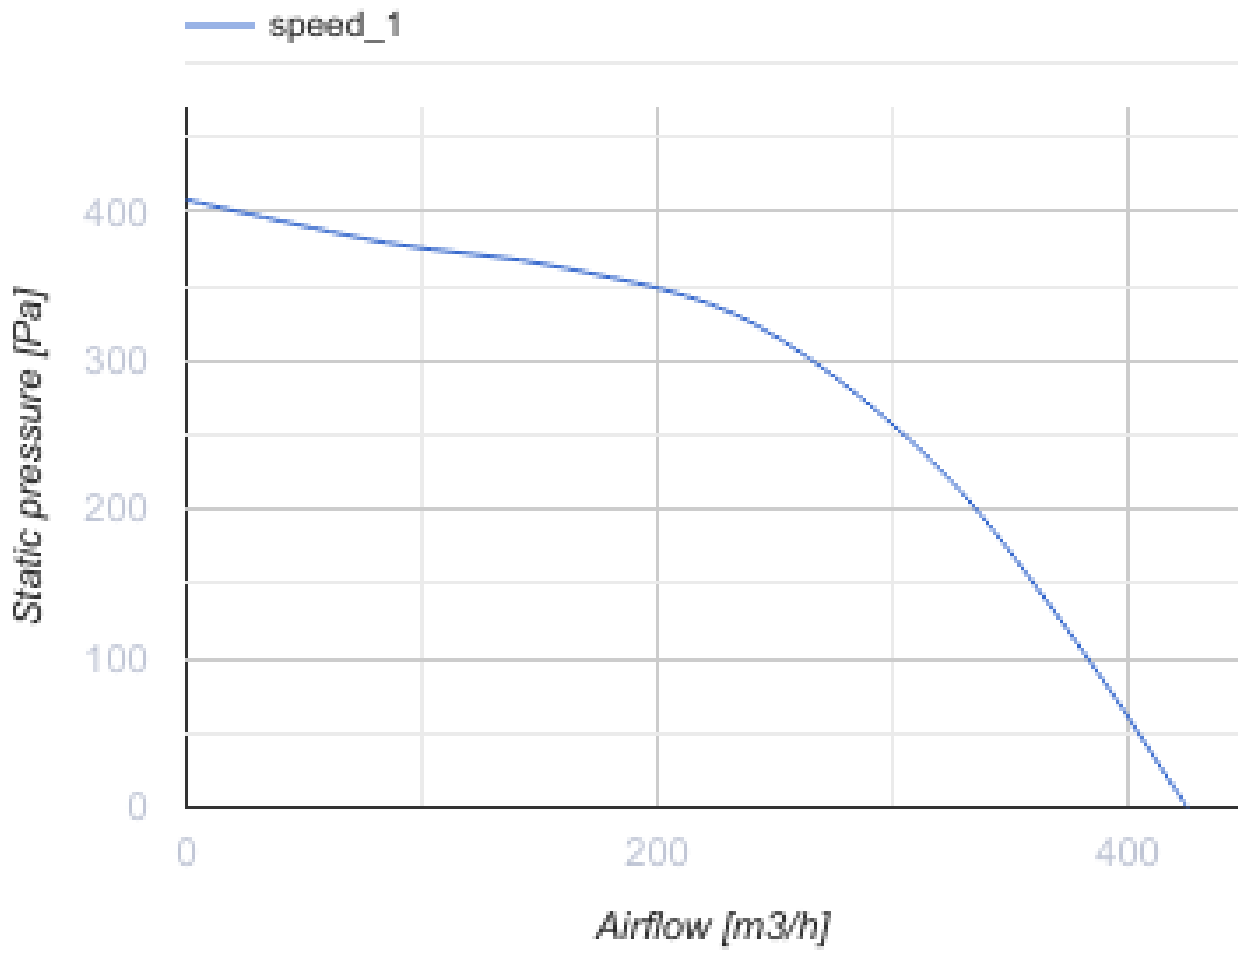

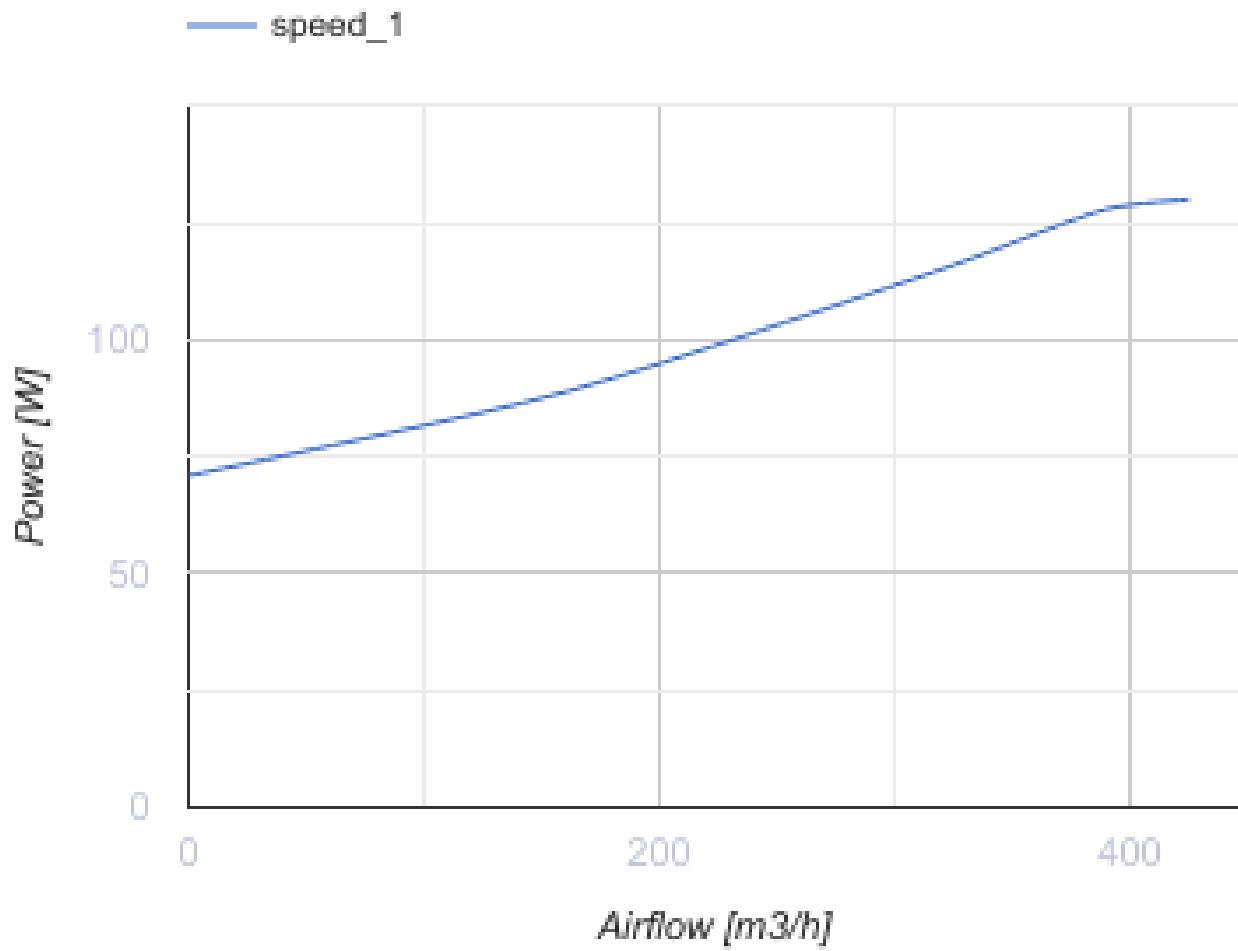

Dimensions

| ØD | B | H | L | P |
|----|-----|-----|-----|----|
| 99 | 184 | 308 | 310 | 48 |

