



KSA 125-2E



Centrifugal fans in heat-and sound-insulated casing

- Maximum airflow: 505
- Sound pressure level LpA at 3 m: 38.3
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal forward curved blades
- Casing material: Galvanized steel
- Installation in any position

	Unit of measurement	KSA 125-2E
Connected air duct size	mm	125
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50
Rated power	W	155
Unit current	A	0.7
Maximum airflow	m ³ /h	505
Sound pressure level LpA at 3 m	dB(A)	38.3
Weight	kg	4.57
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX2
Ingress protection rating of the drive	-	IP44

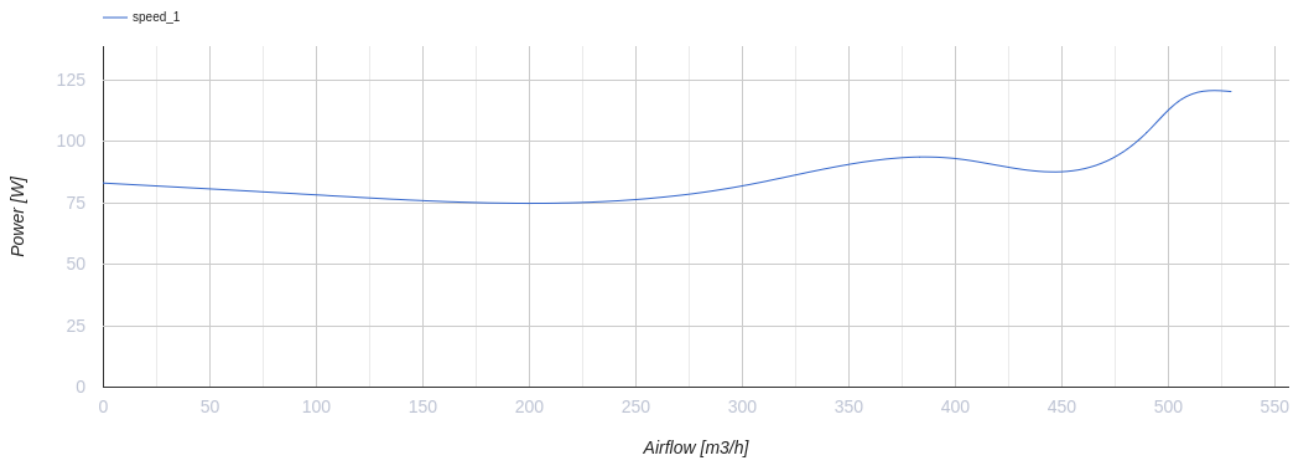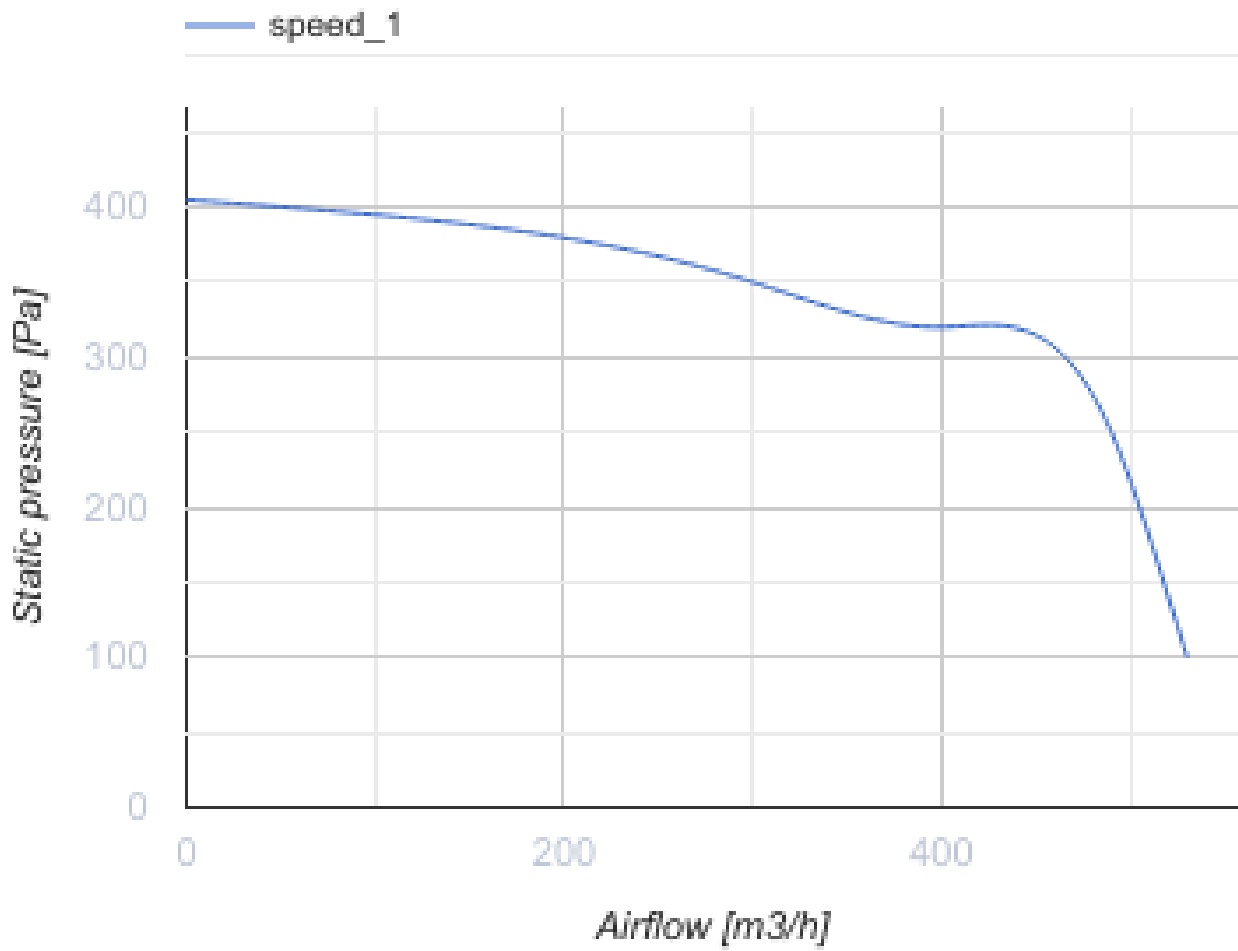

Dimensions

ØD	B	H	L	P
123	204	308	310	48

