



## KSA 160-2E



Centrifugal inline fans with forward curved blades in sound-insulated casings

- Maximum airflow: 750
- Sound pressure level LpA at 3 m: 37.9
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal forward curved blades
- Casing material: Galvanized steel
- Installation in any position

	Unit of measurement	KSA 160-2E
Connected air duct size	mm	160
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50
Rated power	W	335
Unit current	A	1.5
Maximum airflow	m <sup>3</sup> /h	750
Sound pressure level LpA at 3 m	dB(A)	37.9
Weight	kg	6.28
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX2
Ingress protection rating of the drive	-	IP44

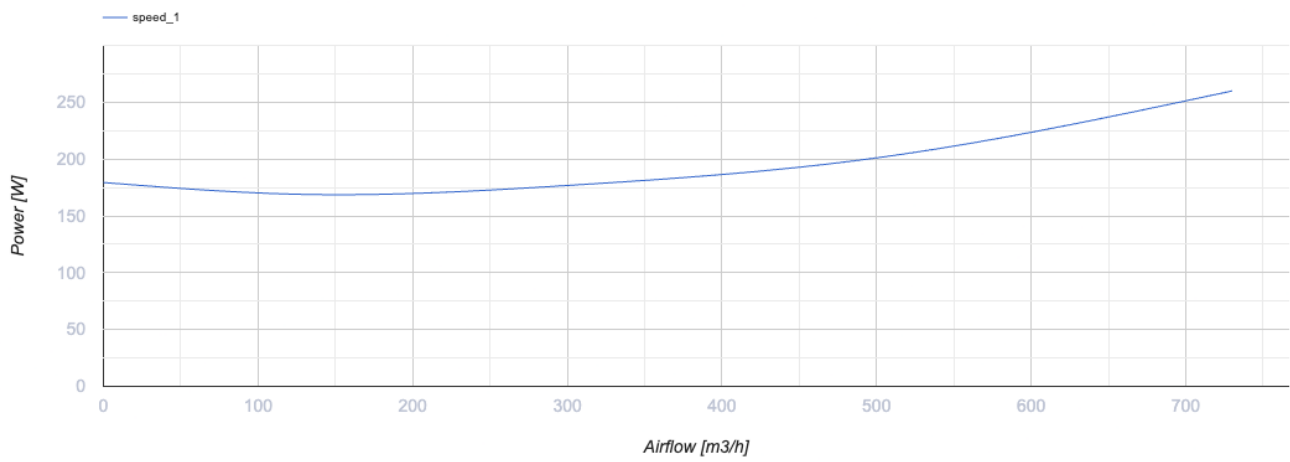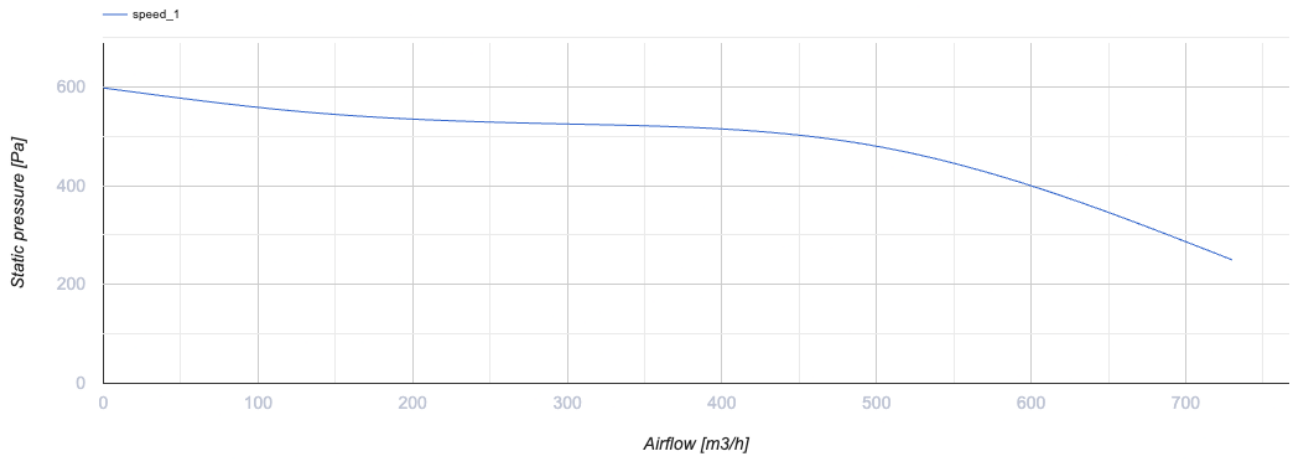

## Dimensions

$\varnothing D$	B	H	L	P
158	231	343	358	48

