



## KSA 200-4E



Centrifugal inline fans with forward curved blades in sound-insulated casings

- Maximum airflow: 640
- Sound pressure level LpA at 3 m: 29.1
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal forward curved blades
- Casing material: Galvanized steel
- Installation in any position

|  | Unit of measurement | KSA 200-4E |
|--|---------------------|------------|
| Connected air duct size                | mm                  | 200        |
| Speed                                  | -                   | 1          |
| Minimum supply voltage                 | V                   | 230        |
| Maximum supply voltage                 | V                   | 230        |
| Power supply frequency                 | Hz                  | 50         |
| Rated power                            | W                   | 115        |
| Unit current                           | A                   | 0.5        |
| Maximum airflow                        | m <sup>3</sup> /h   | 640        |
| Sound pressure level LpA at 3 m        | dB(A)               | 29.1       |
| Weight                                 | kg                  | 8.25       |
| Transported air temperature (max)      | °C                  | 40         |
| Transported air temperature (min)      | °C                  | -25        |
| Ingress protection rating              | -                   | IPX2       |
| Ingress protection rating of the drive | -                   | IP44       |

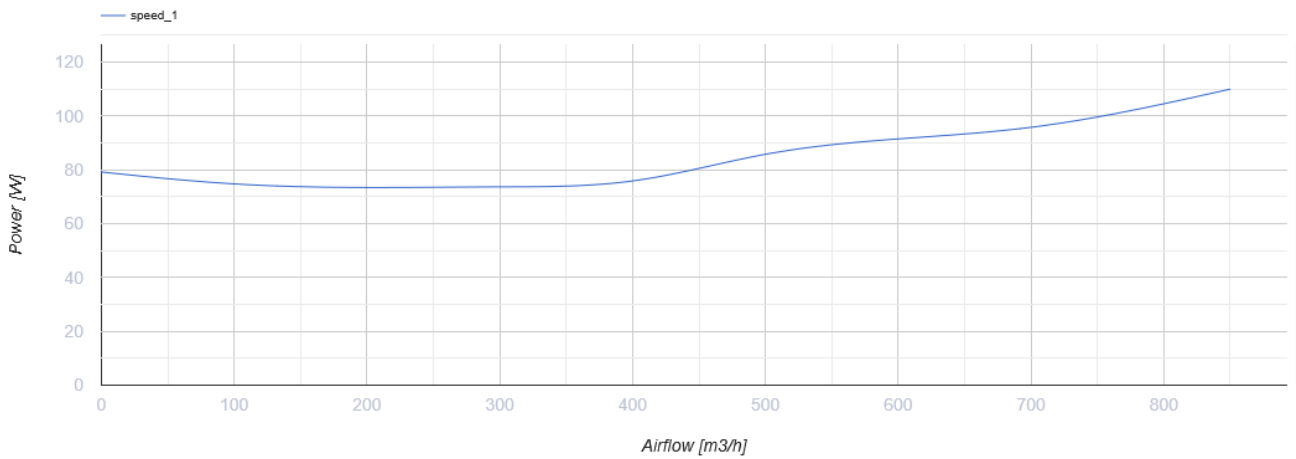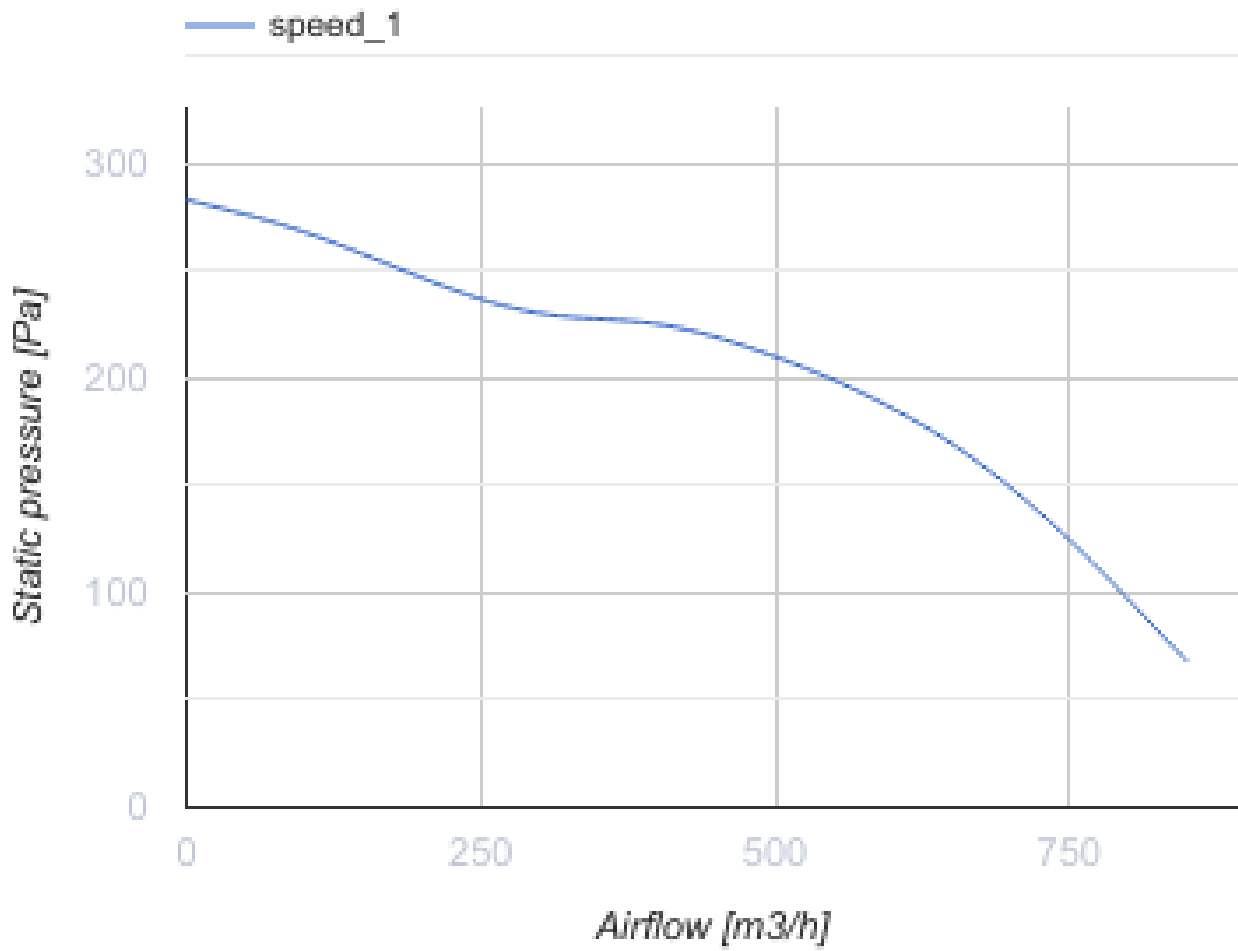

## Dimensions

| ØD  | B   | H   | L   | P  |
|-----|-----|-----|-----|----|
| 198 | 282 | 408 | 445 | 48 |

