


# KSB 100 K2 EC

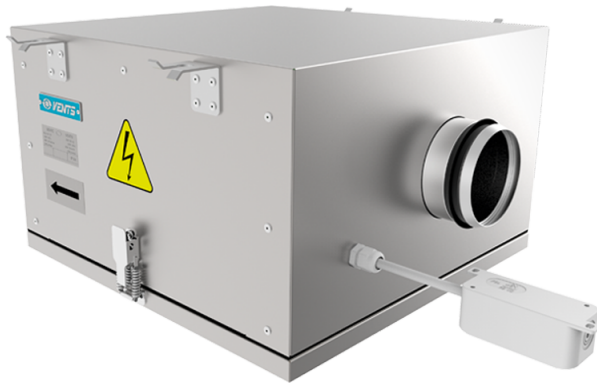


Centrifugal inline fans with backward curved blades in cases with improved sound insulation properties with EC-motors

- Maximum airflow: 341
- Sound pressure level LpA at 3 m: 37
- Sound insulation
- Motor type: EC
- Impeller type: Centrifugal backward curved blades
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position

	Unit of measurement	KSB 100 K2 EC
Connected air duct size	mm	100
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	69
Unit current	A	0.55
Maximum airflow	m <sup>3</sup> /h	341
Sound pressure level LpA at 3 m	dB(A)	37
Weight	kg	12
Transported air temperature (max)	°C	55
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP55



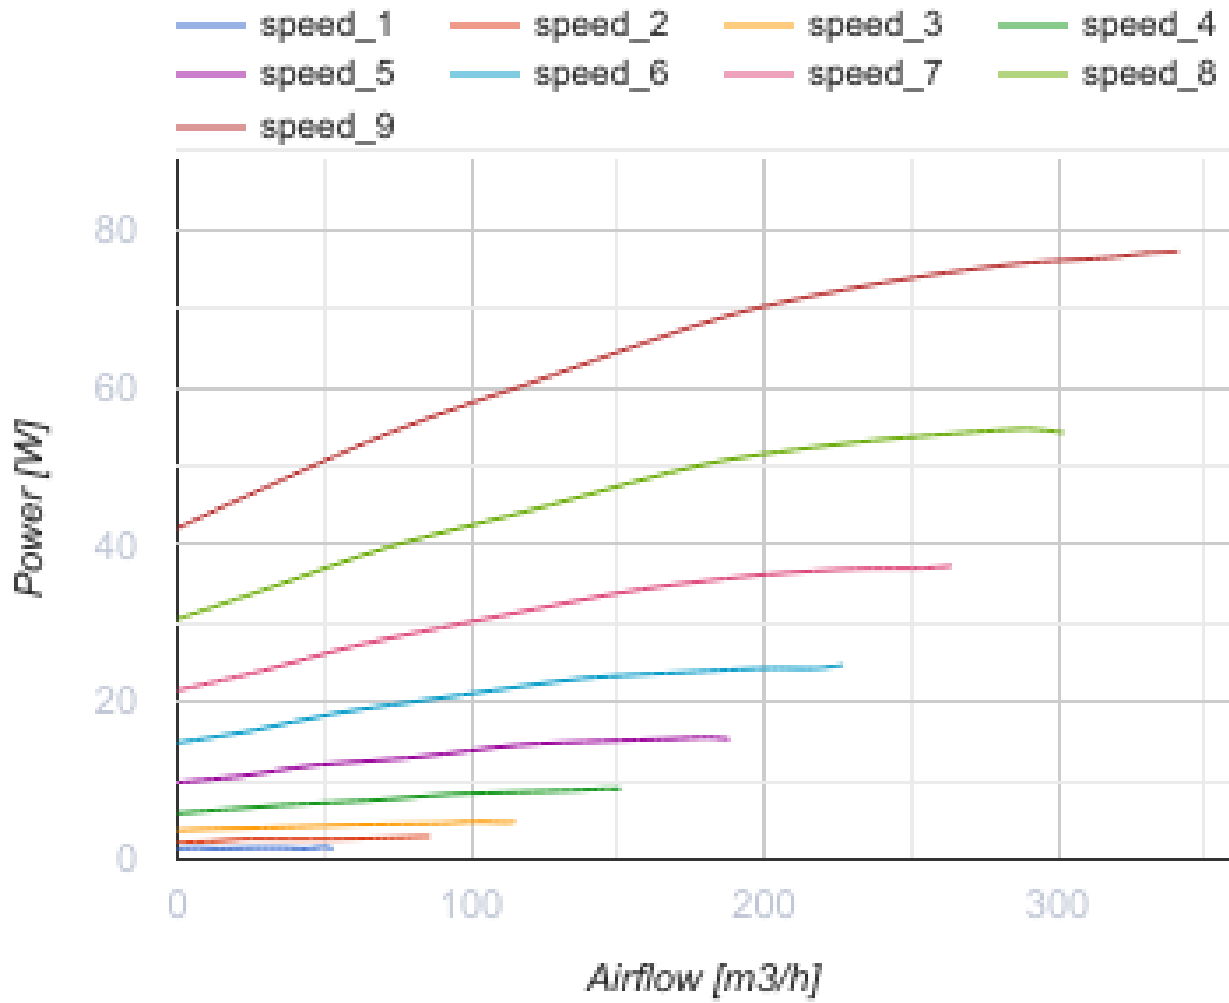

## Dimensions

ØD	B	B1	B2	H	L1	L2
99	420	228	517	270	507	414

