


KSB 100



Inline centrifugal fans in heat- and sound-insulated casing


- Maximum airflow: 240
- Sound pressure level LpA at 3 m: 33
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Galvanized steel
- Installation in any position

	Unit of measurement	KSB 100
Connected air duct size	mm	100
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50/60
Rated power	W	73
Unit current	A	0.32
Maximum airflow	m³/h	240
Sound pressure level LpA at 3 m	dB(A)	33
Weight	kg	5.4
Transported air temperature (max)	°C	55
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4

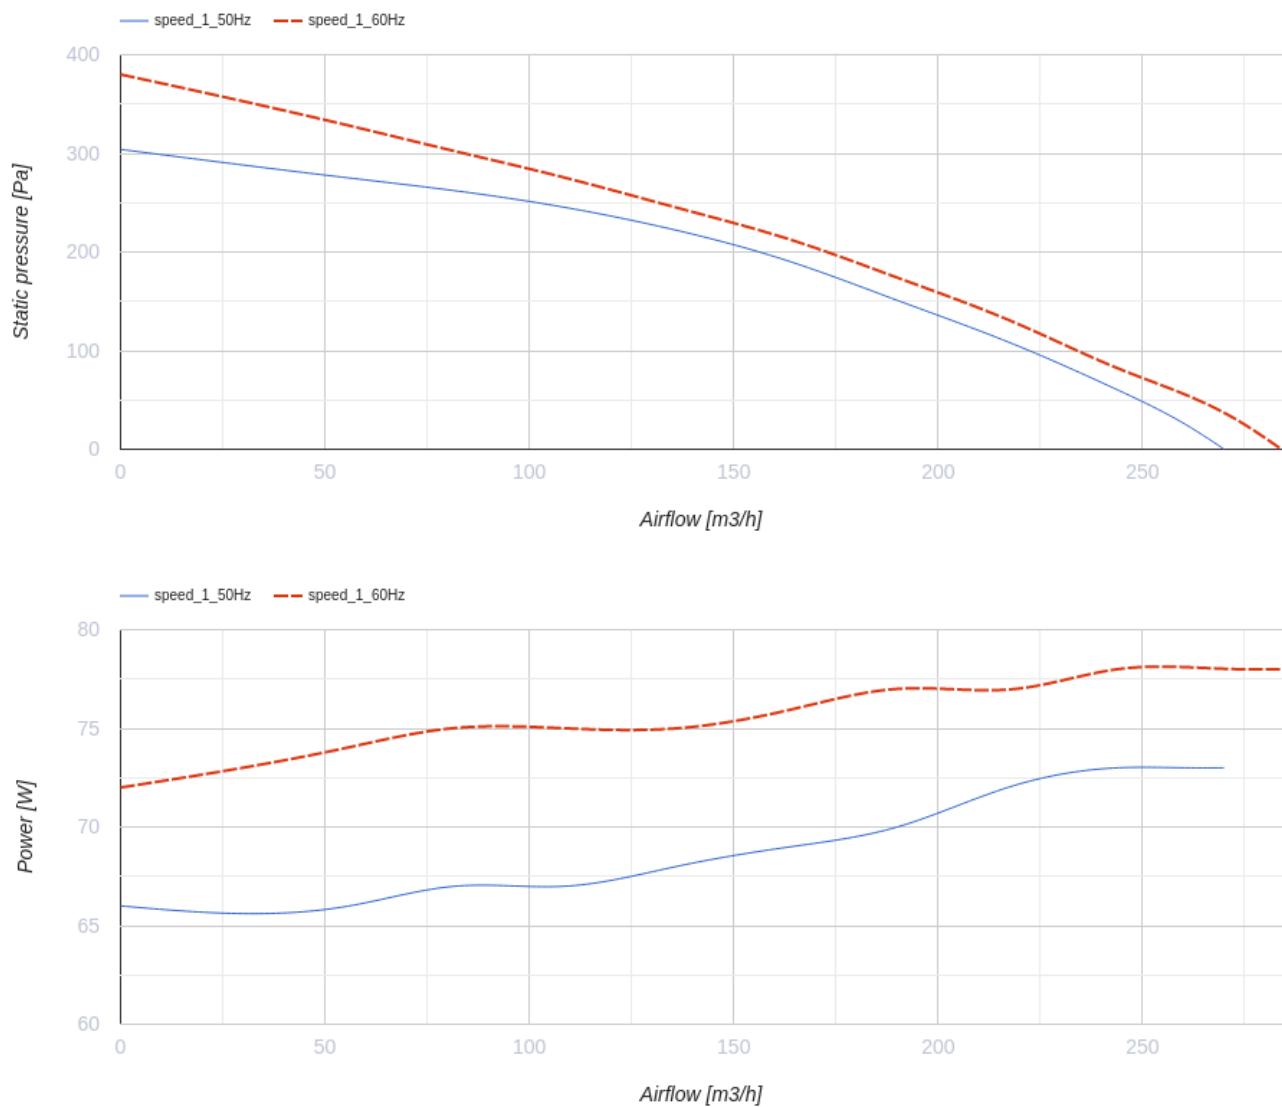


Dimensions

ØD	B	B1	H	L	L1	L2
99	322	280	192	447	380	350

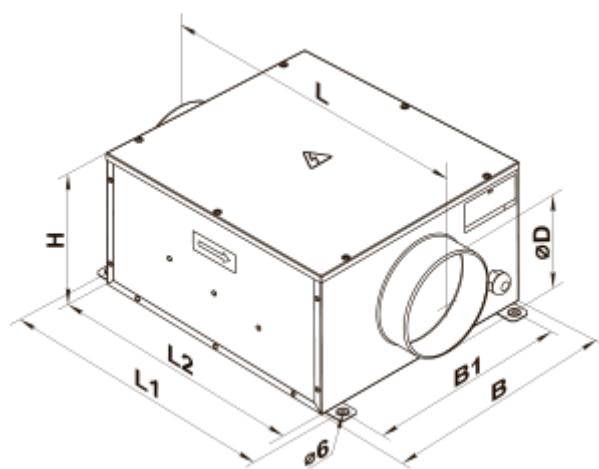

Ecodesign

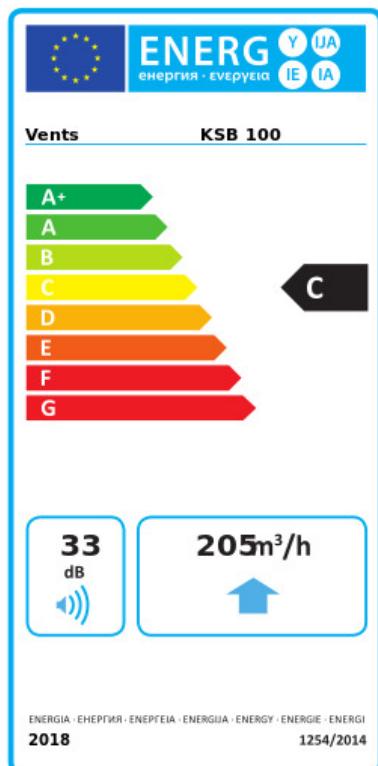

Trademark	Vents		
Model	KSB 100		
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold	Average	Warm
	50.1	A+	23.1 C 7.6 F
Type of ventilation unit	Unidirectional		
Type of drive installed	Multi-speed		
Type of heat recovery system	None		
Maximum flow rate (m ³ /h)	205		
Electric power input (W)	73		
Reference flow rate (m ³ /s)	0.04		
Reference pressure difference (Pa)	50		
Specific power input (SPI) (W/(m ³ /h))	0.28		
Control typology	Local demand control		
Maximum external leakage rates (%)	2.7		
Declared typology	RVU UVU		
Sound power level (dB(A))	33		
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm
	209	209	209
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm
	5536	2830	1280