


KSB 125 K2 EC



Centrifugal inline fans with backward curved blades in cases with improved sound insulation properties with EC-motors

- Maximum airflow: 444
- Sound pressure level LpA at 3 m: 39
- Sound insulation
- Motor type: EC
- Impeller type: Centrifugal backward curved blades
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position

	Unit of measurement	KSB 125 K2 EC
Connected air duct size	mm	125
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	78
Unit current	A	0.59
Maximum airflow	m ³ /h	444
Sound pressure level LpA at 3 m	dB(A)	39
Weight	kg	12
Transported air temperature (max)	°C	55
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP55

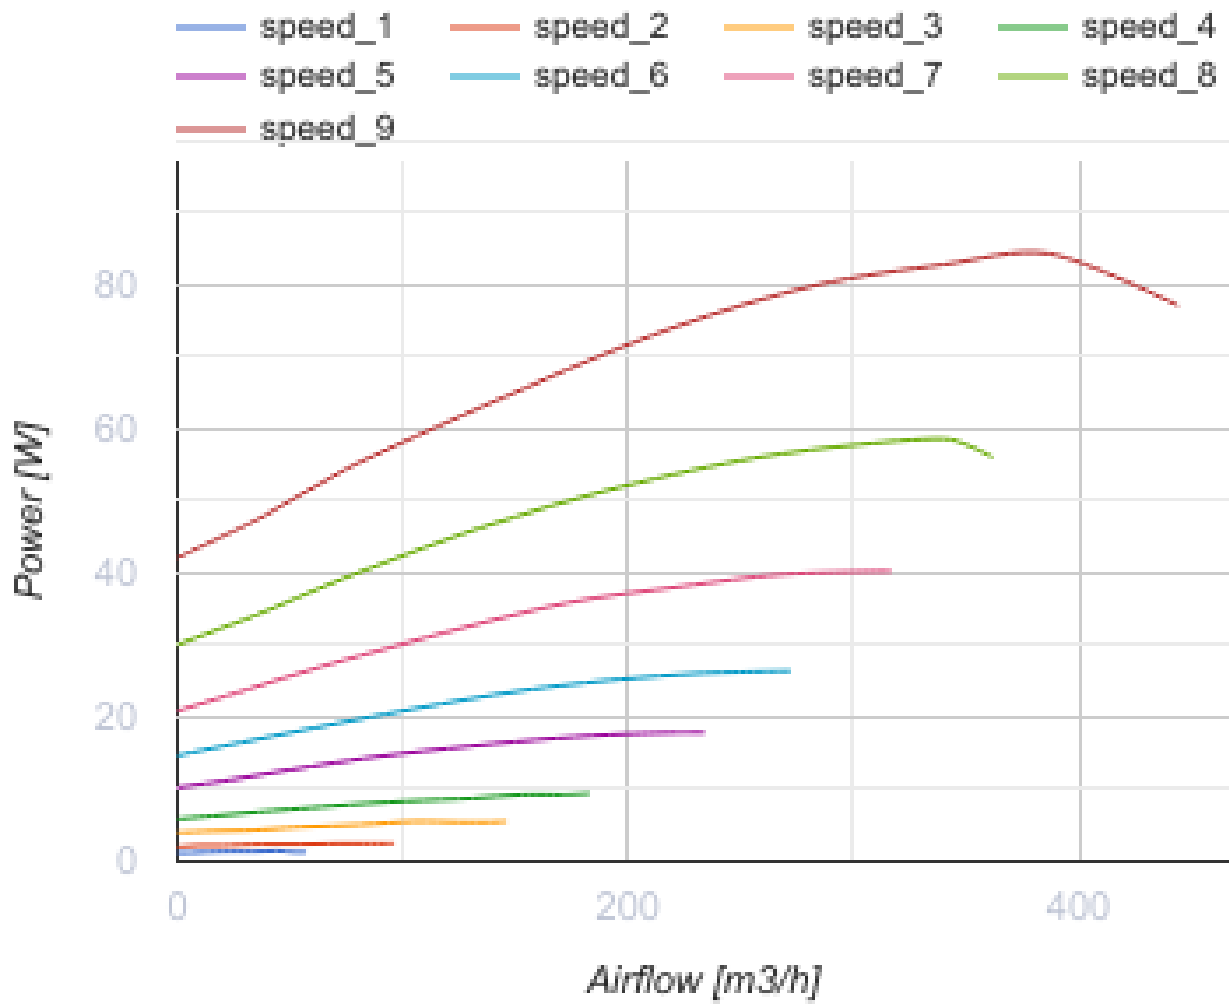

Dimensions

ØD	B	B1	B2	H	L1	L2
124	420	228	517	270	507	414

