

# KSB 150 K2 EC




Centrifugal duct fans in a heat- and sound-insulated casing

- Maximum airflow: 495
- Sound pressure level LpA at 3 m: 40
- Sound insulation
- Motor type: EC
- Impeller type: Centrifugal backward curved blades
- Casing material: Aluzinc
- Installation in any position

|  | Unit of measurement | KSB 150 K2 EC |
|--|---------------------|---------------|
| Connected air duct size                | mm                  | 150           |
| Speed                                  | -                   | 1             |
| Minimum supply voltage                 | V                   | 230           |
| Maximum supply voltage                 | V                   | 230           |
| Power supply frequency                 | Hz                  | 50/60         |
| Rated power                            | W                   | 81            |
| Unit current                           | A                   | 0.61          |
| Maximum airflow                        | m <sup>3</sup> /h   | 495           |
| Sound pressure level LpA at 3 m        | dB(A)               | 40            |
| Weight                                 | kg                  | 12            |
| Transported air temperature (max)      | °C                  | 55            |
| Transported air temperature (min)      | °C                  | -25           |
| Ingress protection rating              | -                   | IPX4          |
| Ingress protection rating of the drive | -                   | IP55          |



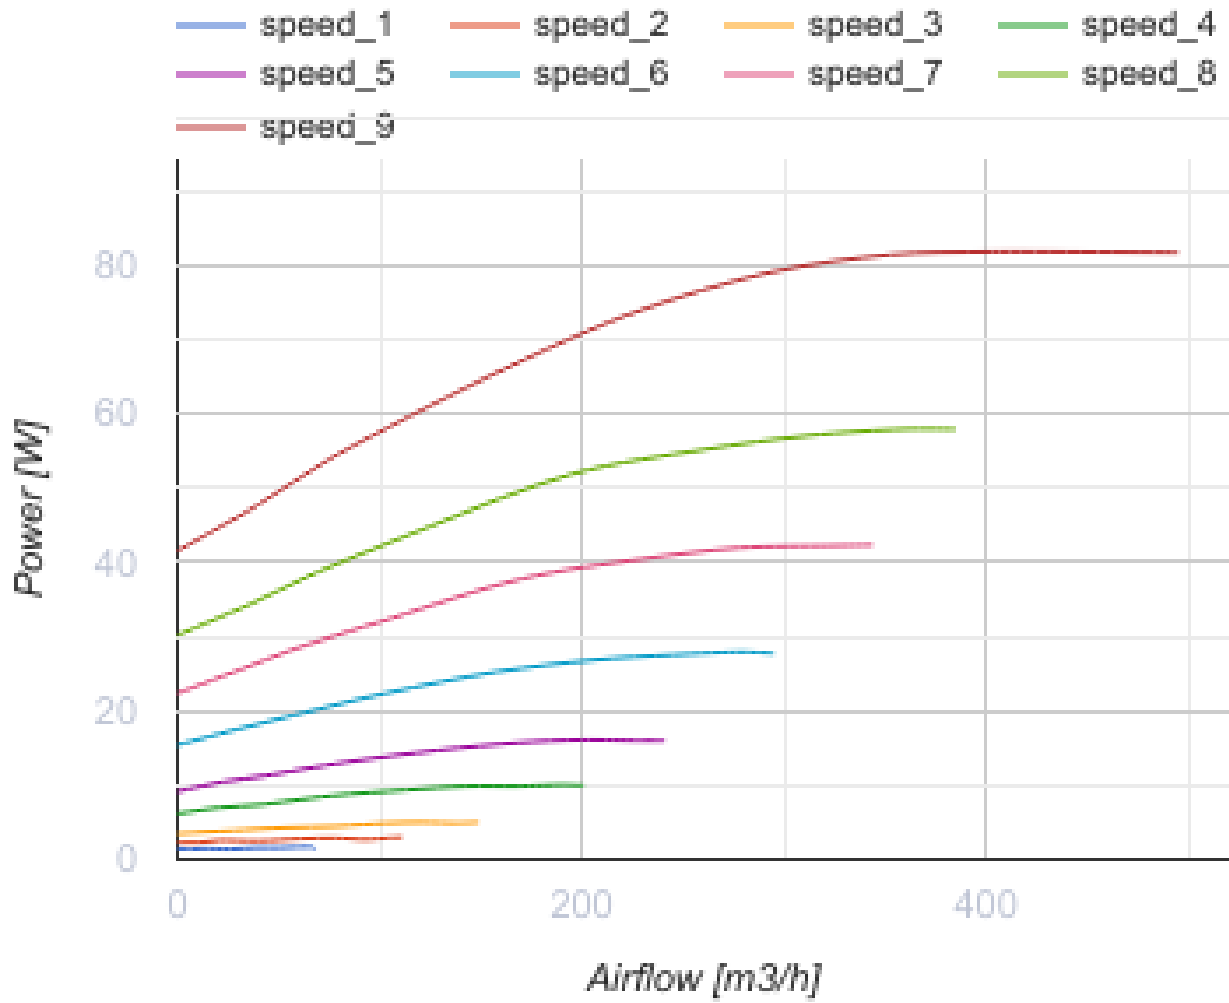

## Dimensions

| ØD  | B   | B1  | B2  | H   | L1  | L2  |
|-----|-----|-----|-----|-----|-----|-----|
| 149 | 420 | 228 | 517 | 270 | 507 | 414 |

