



KSB 160 EC



Centrifugal inline fans in insulated casing

- Maximum airflow: 425
- Sound pressure level LpA at 3 m: 35
- Sound insulation
- Motor type: EC
- Impeller type: Centrifugal backward curved blades
- Casing material: Galvanized steel
- Installation in any position

	Unit of measurement	KSB 160 EC
Connected air duct size	mm	160
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	94.8
Unit current	A	0.77
Maximum airflow	m ³ /h	425
Sound pressure level LpA at 3 m	dB(A)	35
Transported air temperature (max)	°C	60
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP55

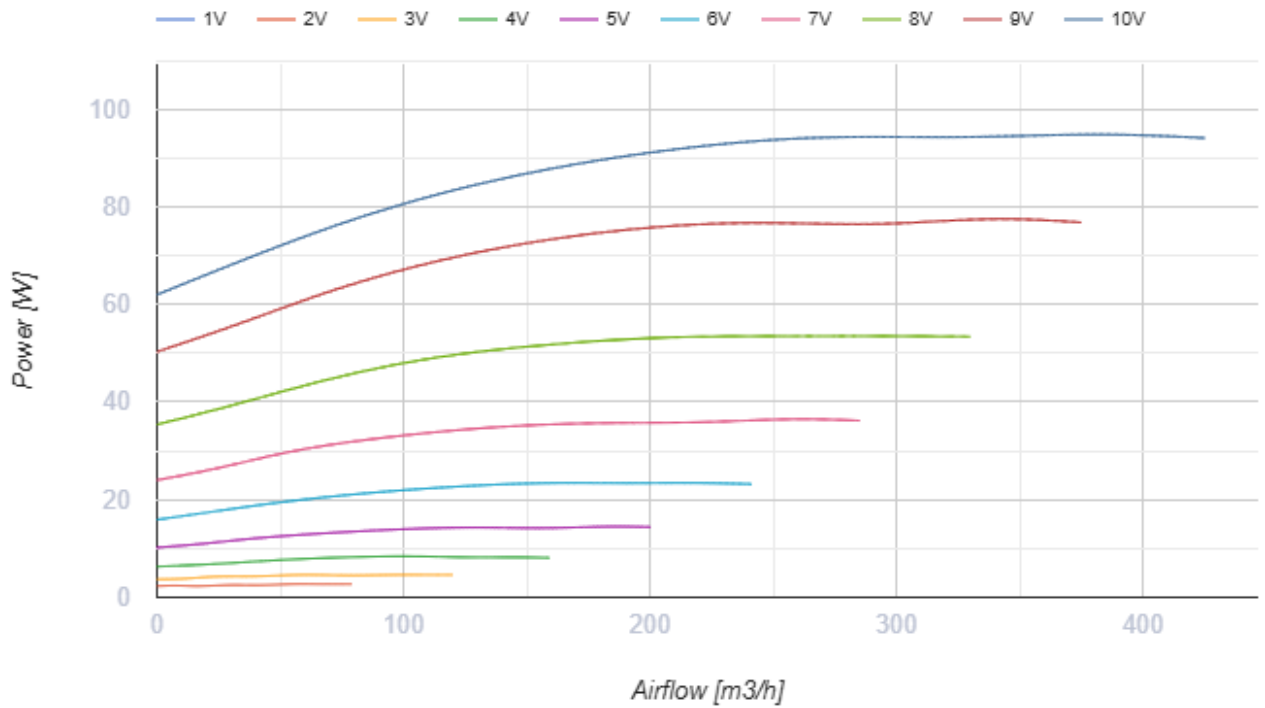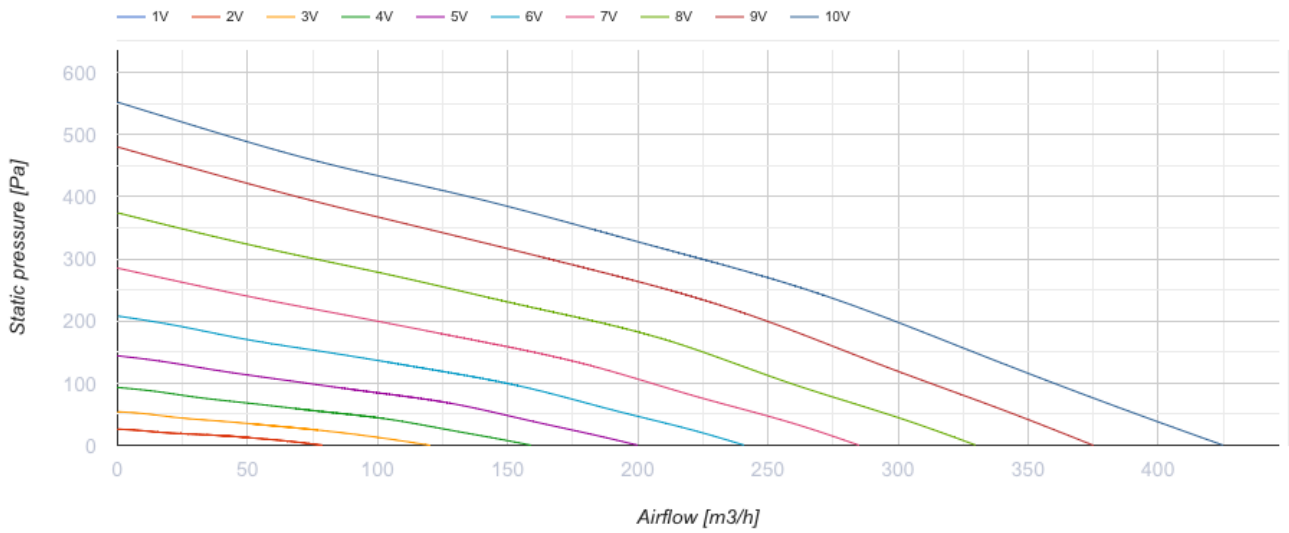

Dimensions

ØD	L	B	H	L1	B1	L2	B2
159	355	385	220	405	477	310	410

