




KSB 160 K2 EC

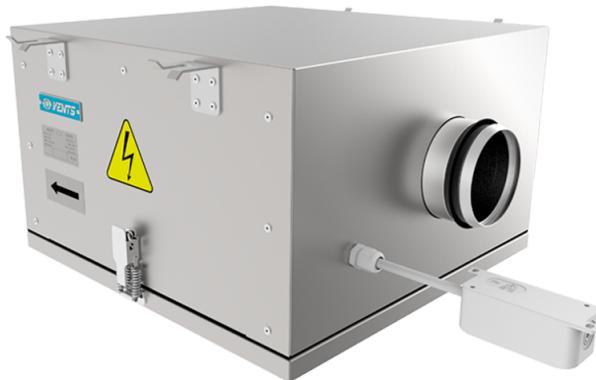

Centrifugal duct fans in a heat- and sound-insulated casing


- Maximum airflow: 454
- Sound pressure level LpA at 3 m: 40
- Sound insulation
- Motor type: EC
- Impeller type: Centrifugal backward curved blades
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position

	Unit of measurement	KSB 160 K2 EC
Connected air duct size	mm	160
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	85
Unit current	A	0.76
Maximum airflow	m³/h	454
Sound pressure level LpA at 3 m	dB(A)	40
Weight	kg	12
Transported air temperature (max)	°C	55
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP55

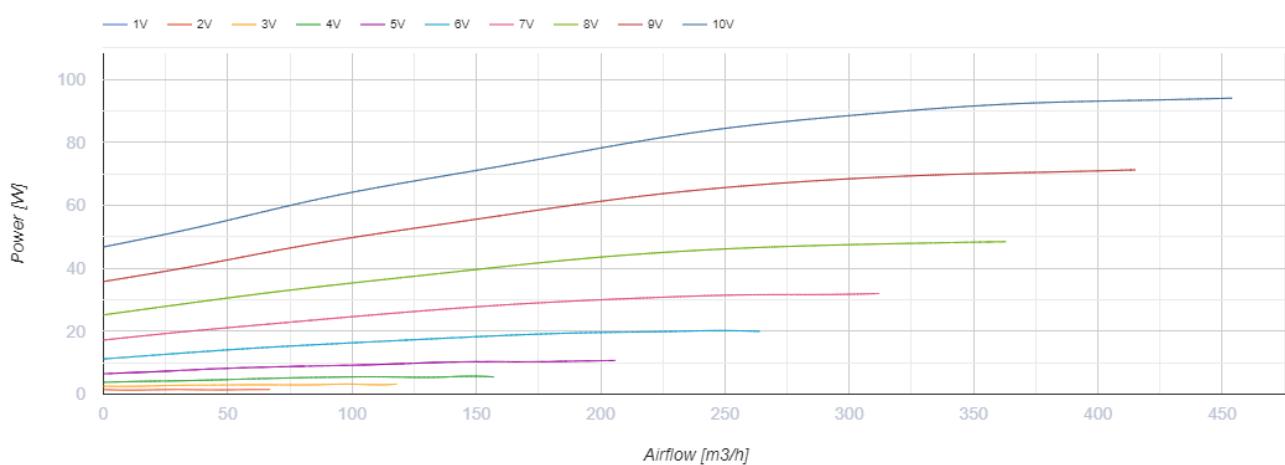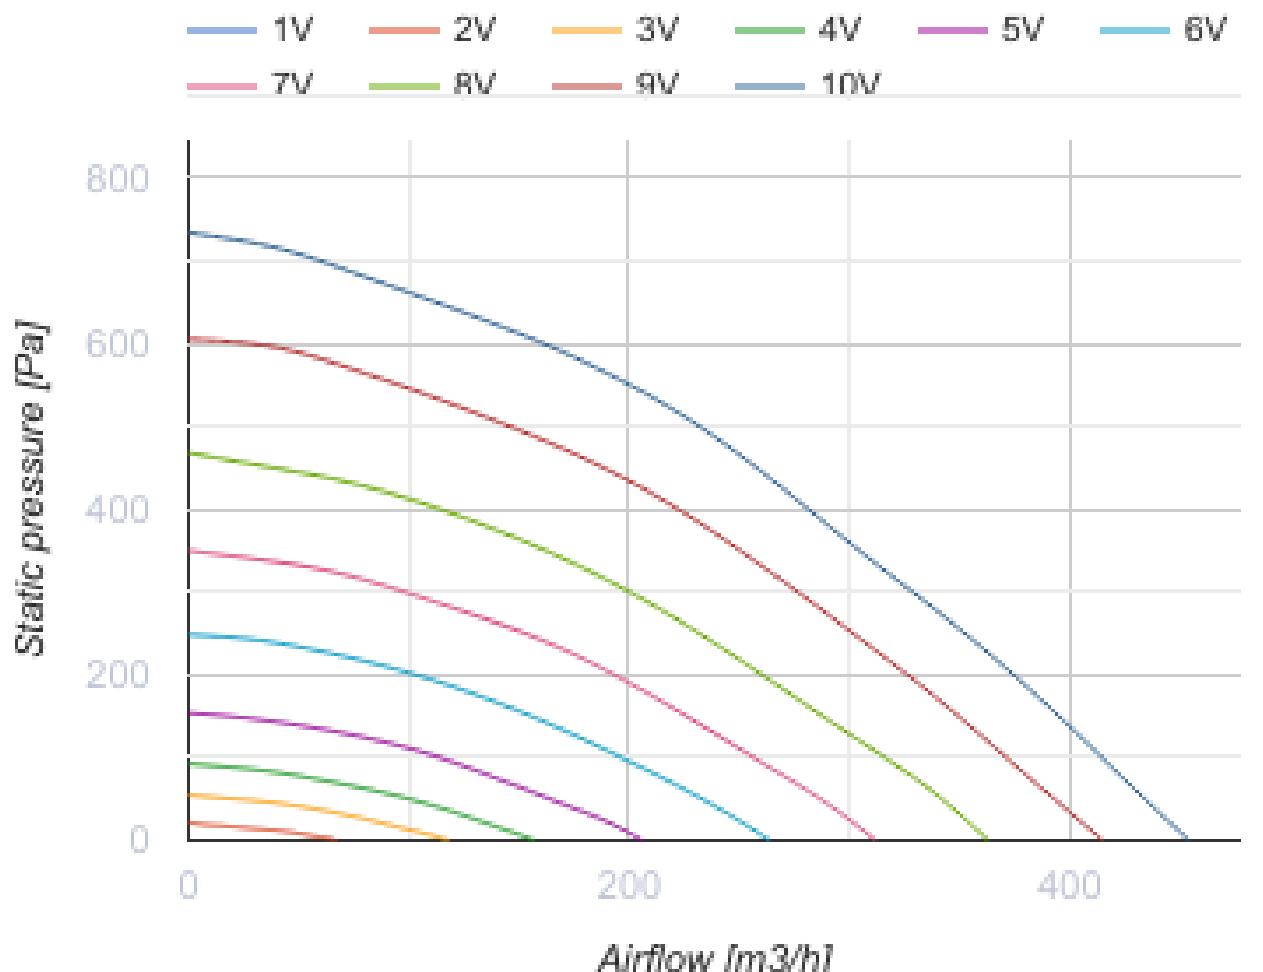


Dimensions

ØD	B	B1	B2	H	L1	L2
159	420	228	517	270	507	414

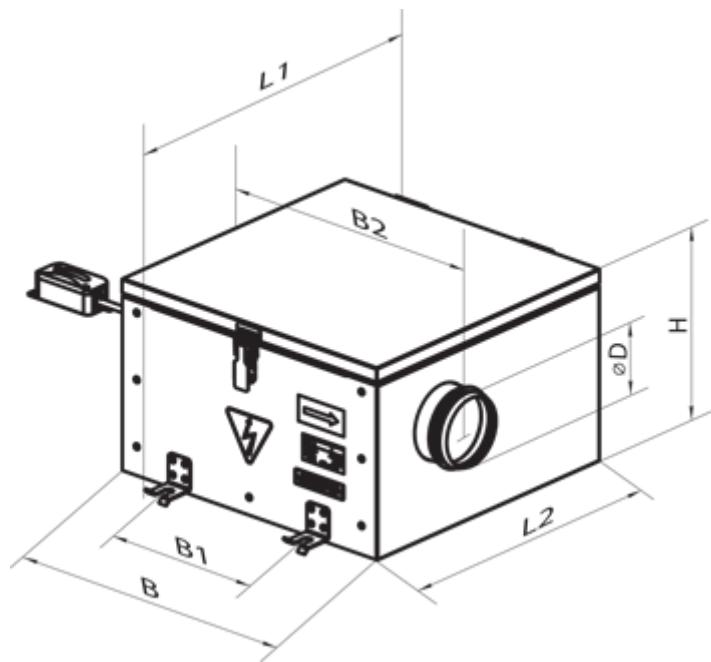

Ecodesign

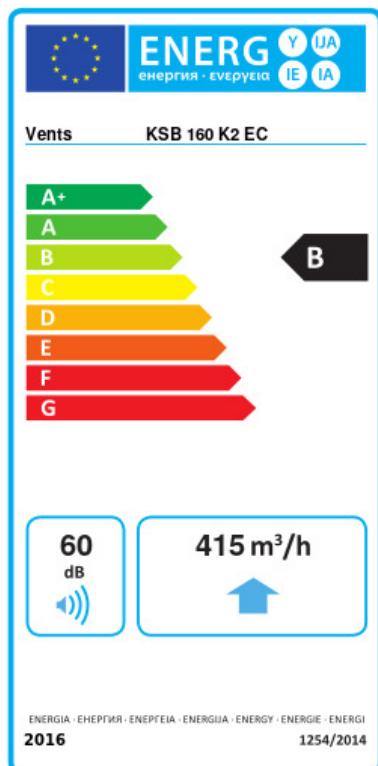

Trademark	Vents			
Model	KSB 160 K2 EC			
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold	Average	Warm	-53.9 A+ -26.9 B -11.4 E
	-53.9	A+	-26.9	B
Type of ventilation unit	Unidirectional			
Type of drive installed	Variable speed			
Type of heat recovery system	None			
Maximum flow rate (m ³ /h)	415			
Electric power input (W)	93.4			
Reference flow rate (m ³ /s)	0.081			
Reference pressure difference (Pa)	50			
Specific power input (SPI) (W/(m ³ /h))	0.108			
Control typology	Local demand control			
Maximum external leakage rates (%)	2.7			
Declared typology	RVU UVU			
Sound power level (dB(A))	60			
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm	57 57 57
	57	57	57	
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm	5536 2830 1280
	5536	2830	1280	