


KSB 200



Inline centrifugal fans in heat- and sound-insulated casing


- Maximum airflow: 730
- Sound pressure level LpA at 3 m: 38
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Galvanized steel
- Installation in any position

	Unit of measurement	KSB 200
Connected air duct size	mm	200
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50/60
Rated power	W	103
Unit current	A	0.45
Maximum airflow	m³/h	730
Sound pressure level LpA at 3 m	dB(A)	38
Weight	kg	10
Transported air temperature (max)	°C	50
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4

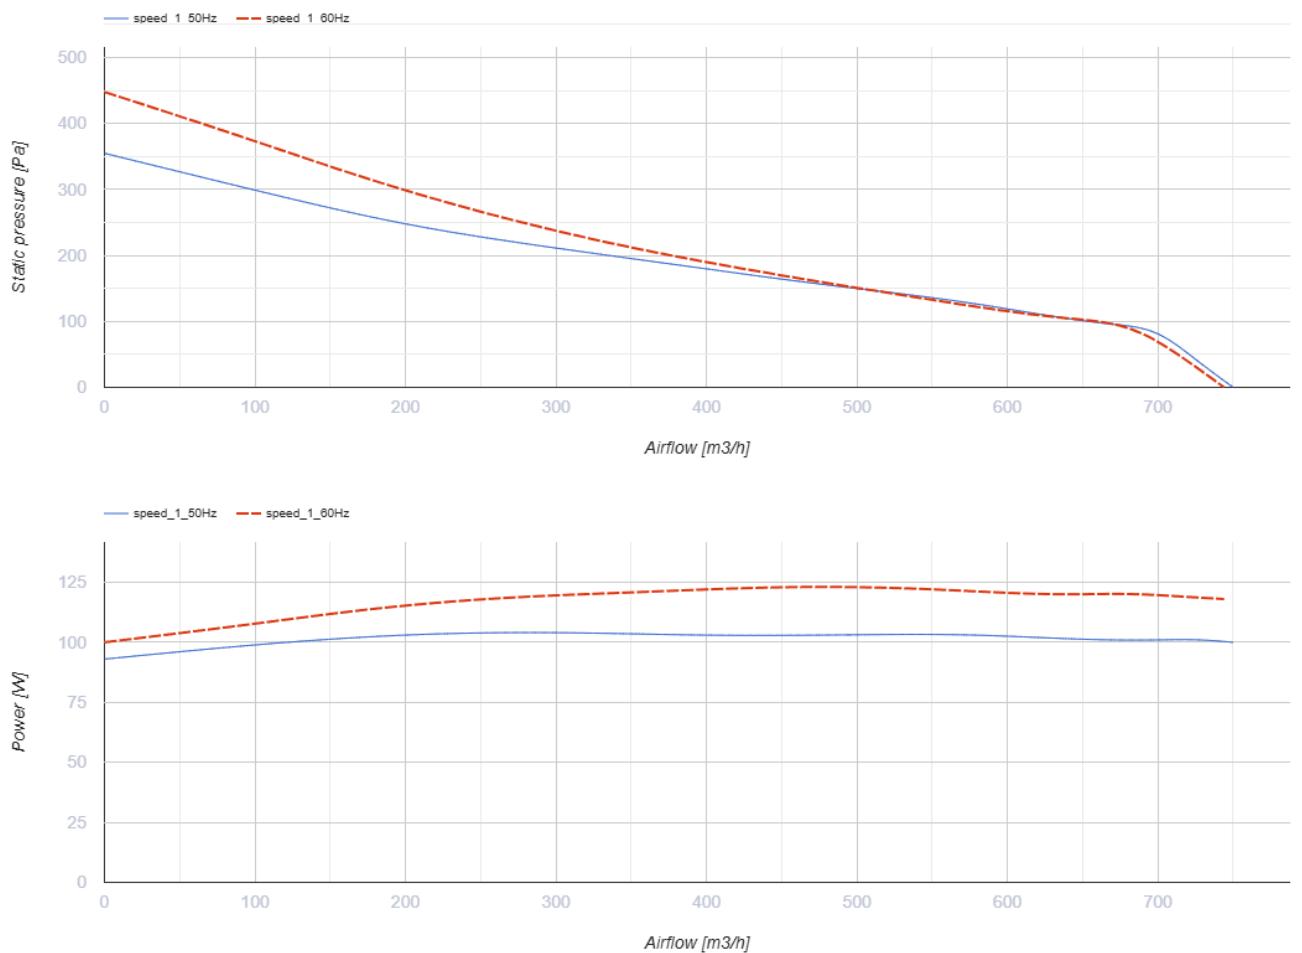


Dimensions

ØD	B	B1	H	L	L1	L2
199	432	368	287	588	506	480

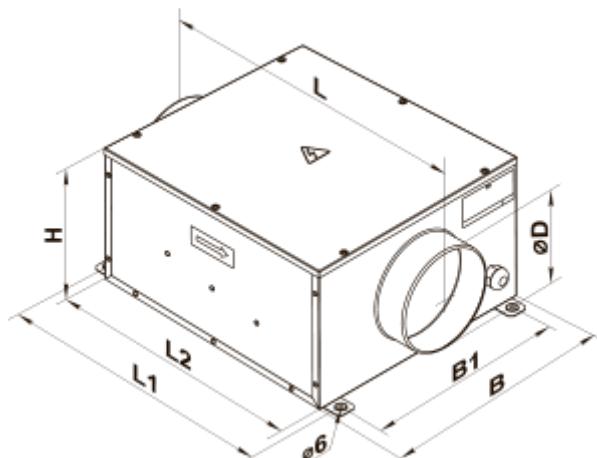

Ecodesign

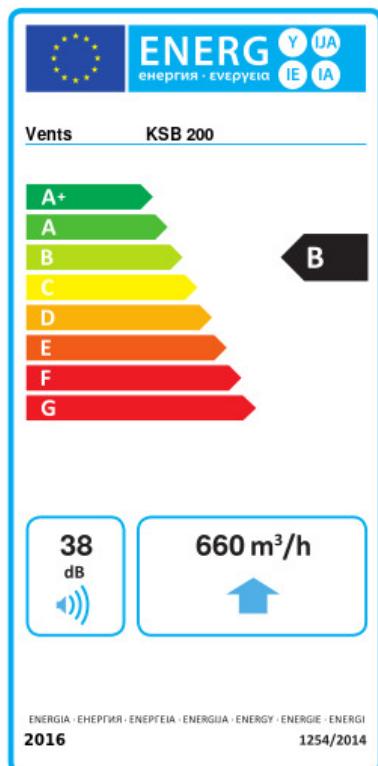

Trademark	Vents			
Model	KSB 200			
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold	Average	Warm	
-53.1	A+	-26	B	-10.5 E
Type of ventilation unit	Unidirectional			
Type of drive installed	Multi-speed			
Type of heat recovery system	None			
Maximum flow rate (m ³ /h)	660			
Electric power input (W)	103			
Reference flow rate (m ³ /s)	0.128			
Reference pressure difference (Pa)	50			
Specific power input (SPI) (W/(m ³ /h))	0.123			
Control typology	Local demand control			
Maximum external leakage rates (%)	2.7			
Declared typology	RVU UVU			
Sound power level (dB(A))	38			
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm	
92	92	92	92	
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm	
5536	2830	1280		