


# KSK 200 4E




Kitchen inline fans in sound-insulated casings with operational temperature of 120 °C

- Maximum airflow: 1600
- Sound pressure level LpA at 3 m: 45
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal forward curved blades
- Casing material: Galvanized steel


	Unit of measurement	KSK 200 4E
Connected air duct size	mm	200
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50
Rated power	W	550
Unit current	A	3
Maximum airflow	m <sup>3</sup> /h	1600
Sound pressure level LpA at 3 m	dB(A)	45
Weight	kg	25
Transported air temperature (max)	°C	120
Transported air temperature (min)	°C	-20
Ingress protection rating	-	IP54

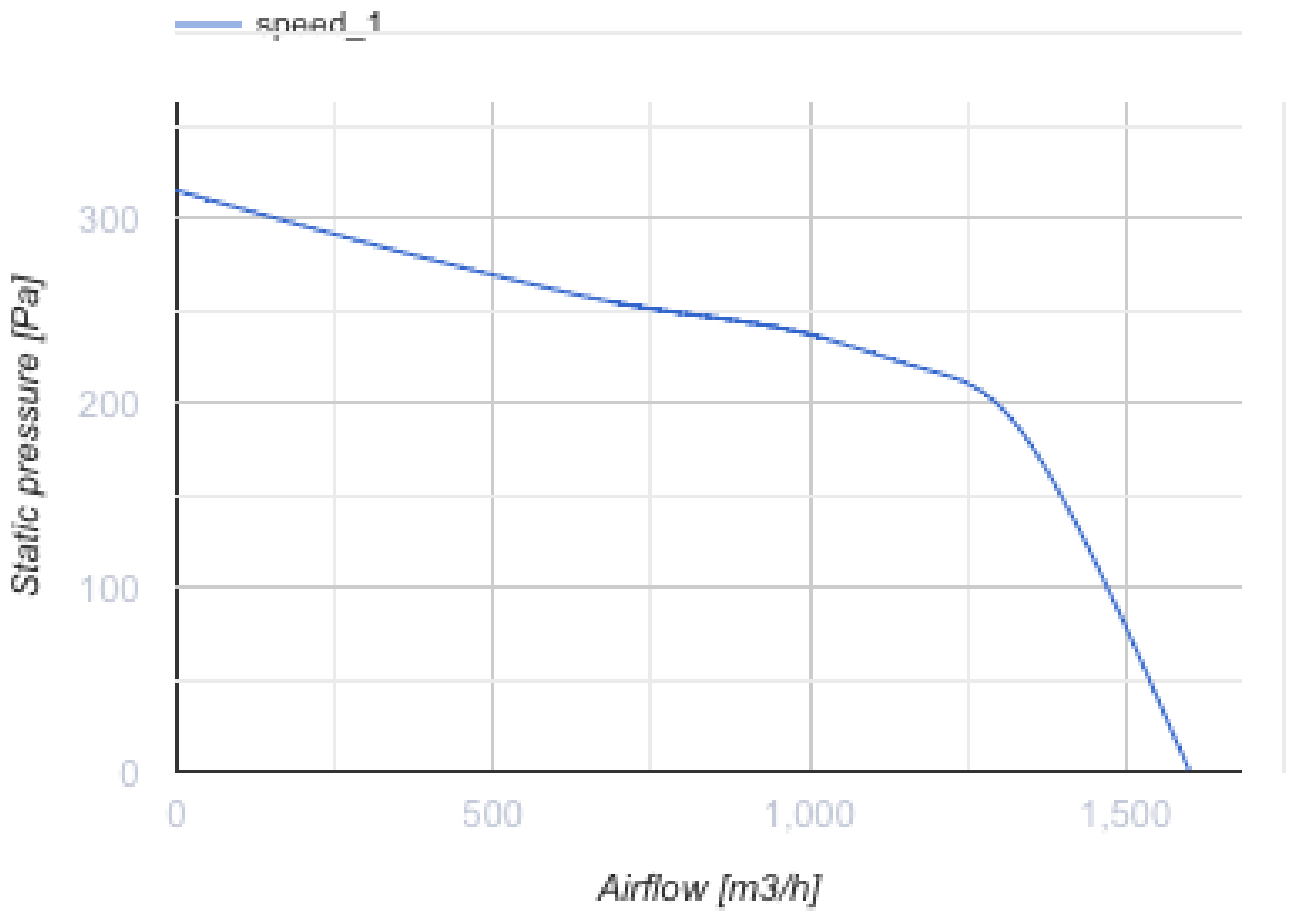


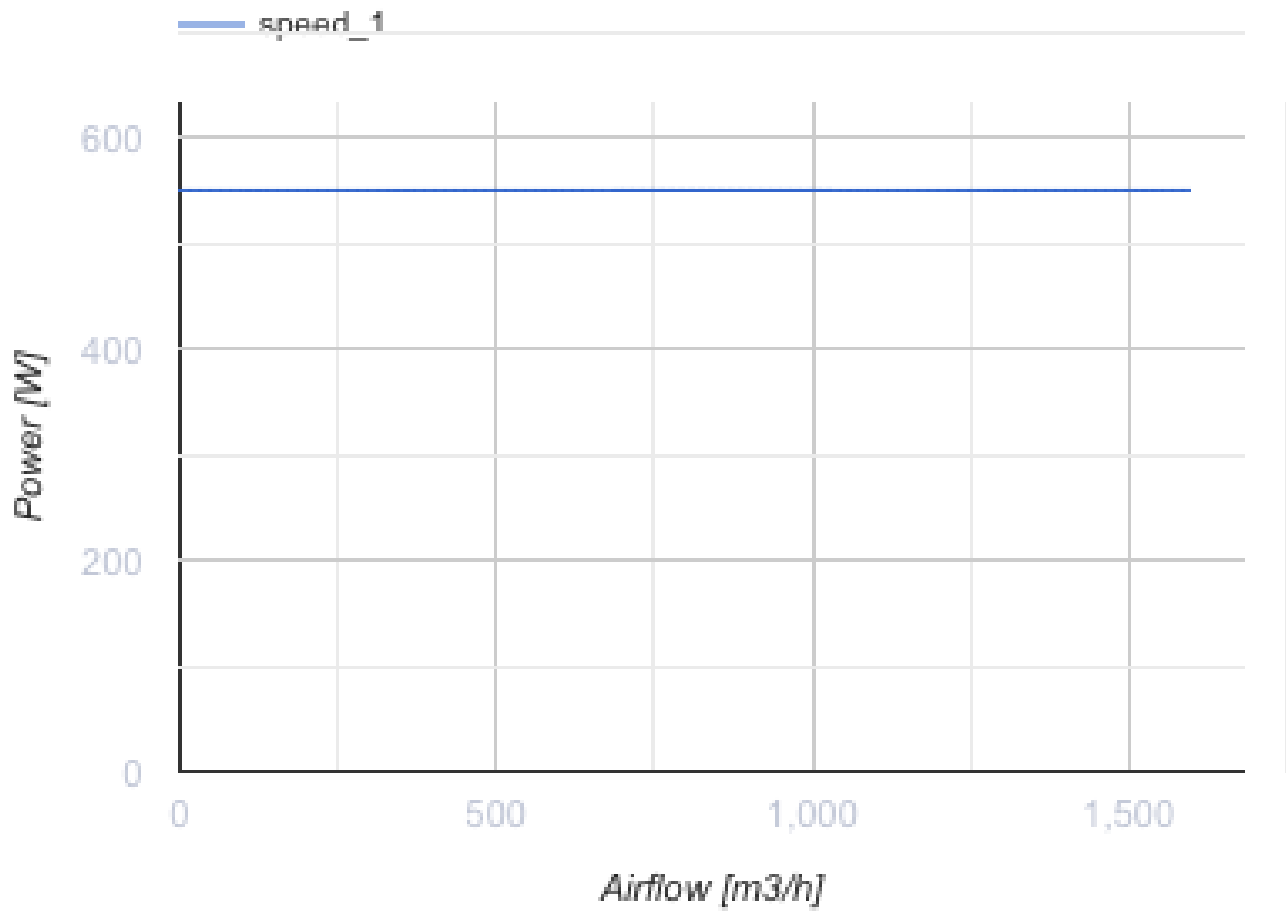

## Dimensions


ØD	B	B1	H	H1	L	L1	L2	L3	L4
200	485	365	600	425	625	600	570	515	235

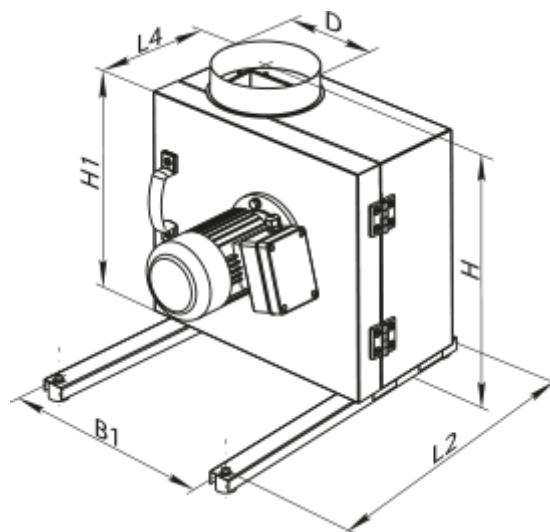

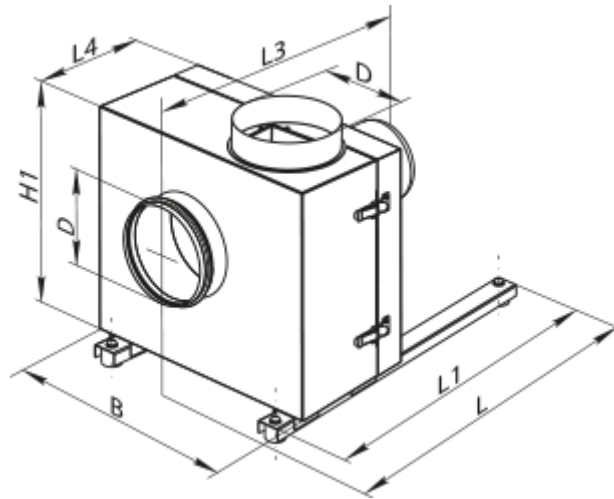


## Accessories

### For round ducts

Name	Photo	Description
<a href="#">KOM 200</a>		Backdraught damper with spring-loaded plates for shutting off air flow in round air ducts

### Other accessories

Name	Photo	Description
<a href="#">VVG 200</a>		Flexible anti-vibration inserts for round ducts