



KSK 355 2D



Centrifugal kitchen fan in sound-insulated casing


- Maximum airflow: 6185
- Sound pressure level LpA at 3 m: 54
- Fire resistance class: 120°C within 60 min
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Galvanized steel

| | Unit of measurement | KSK 355 2D |
|-----------------------------------|---------------------|------------|
| Connected air duct size | mm | 355 |
| Speed | - | 1 |
| Minimum supply voltage | V | 400 |
| Maximum supply voltage | V | 400 |
| Power supply frequency | Hz | 50 |
| Rated power | W | 3145 |
| Unit current | A | 6.12 |
| Maximum airflow | m ³ /h | 6185 |
| Sound pressure level LpA at 3 m | dB(A) | 54 |
| Weight | kg | 65 |
| Transported air temperature (max) | °C | 110 |
| Transported air temperature (min) | °C | -20 |
| Ingress protection rating | - | IP54 |

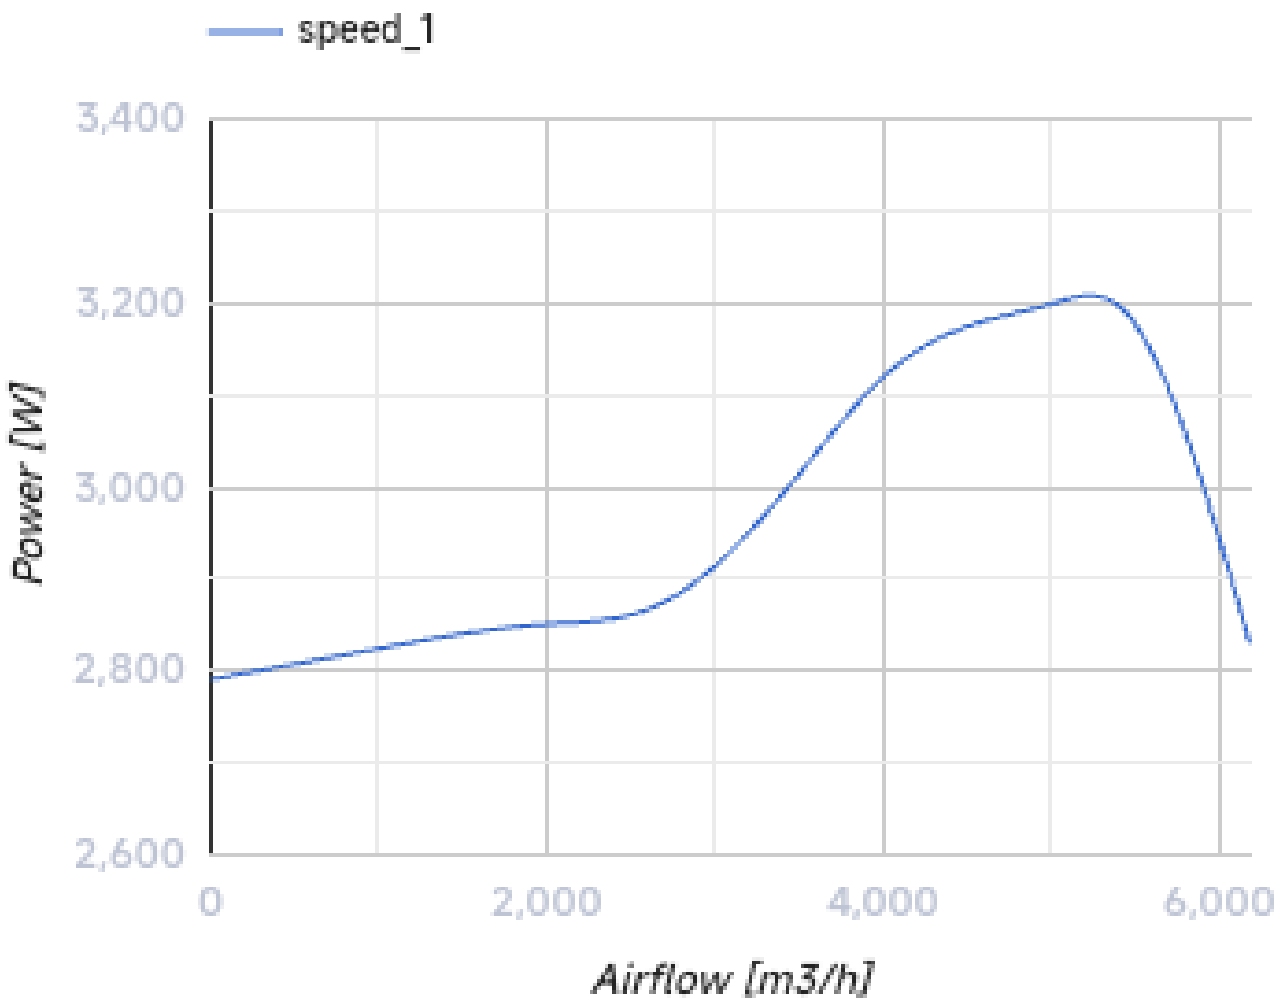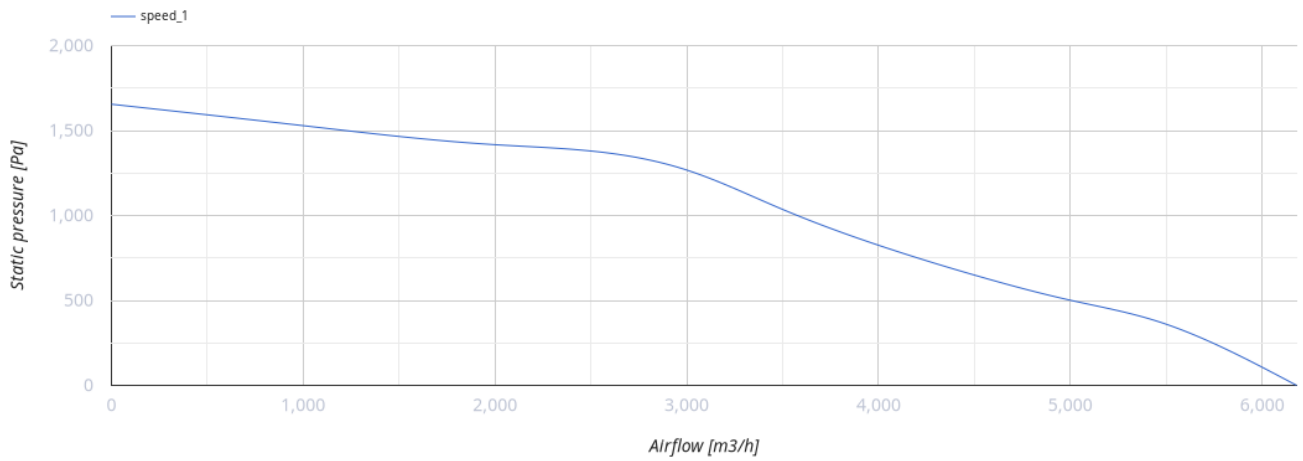


Dimensions

| ØD | B | B1 | H | H1 | L | L1 | L2 | L3 | L4 |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 355 | 740 | 600 | 764 | 655 | 727 | 700 | 650 | 737 | 352 |

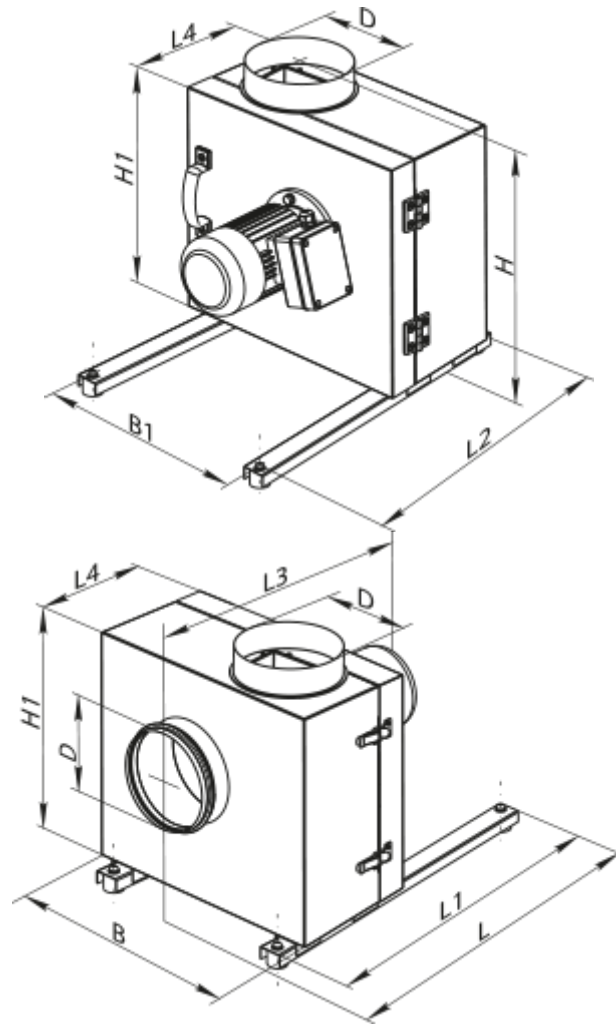

Accessories

Other accessories

| Name | Photo | Description |
|-------------------------|---|-----------------------------------|
| VVG 355 |  | Flexible anti-vibration connector |