



# KSK 400 4D



Centrifugal kitchen fan in sound-insulated casing

- Maximum airflow: 5098
- Sound pressure level LpA at 3 m: 53
- Fire resistance class: 120°C within 60 min
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Galvanized steel

|                                   | Unit of measurement | KSK 400 4D |
|-----------------------------------|---------------------|------------|
| Connected air duct size           | mm                  | 400        |
| Speed                             | -                   | 1          |
| Minimum supply voltage            | V                   | 400        |
| Maximum supply voltage            | V                   | 400        |
| Power supply frequency            | Hz                  | 50         |
| Rated power                       | W                   | 785        |
| Unit current                      | A                   | 2.25       |
| Maximum airflow                   | m <sup>3</sup> /h   | 5098       |
| Sound pressure level LpA at 3 m   | dB(A)               | 53         |
| Weight                            | kg                  | 92         |
| Transported air temperature (max) | °C                  | 110        |
| Transported air temperature (min) | °C                  | -20        |
| Ingress protection rating         | -                   | IP54       |

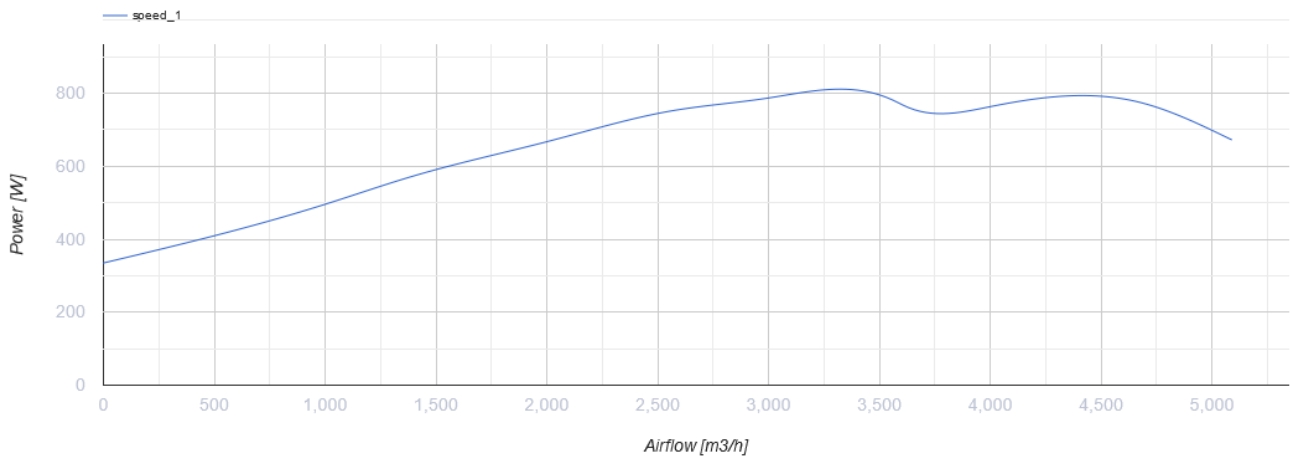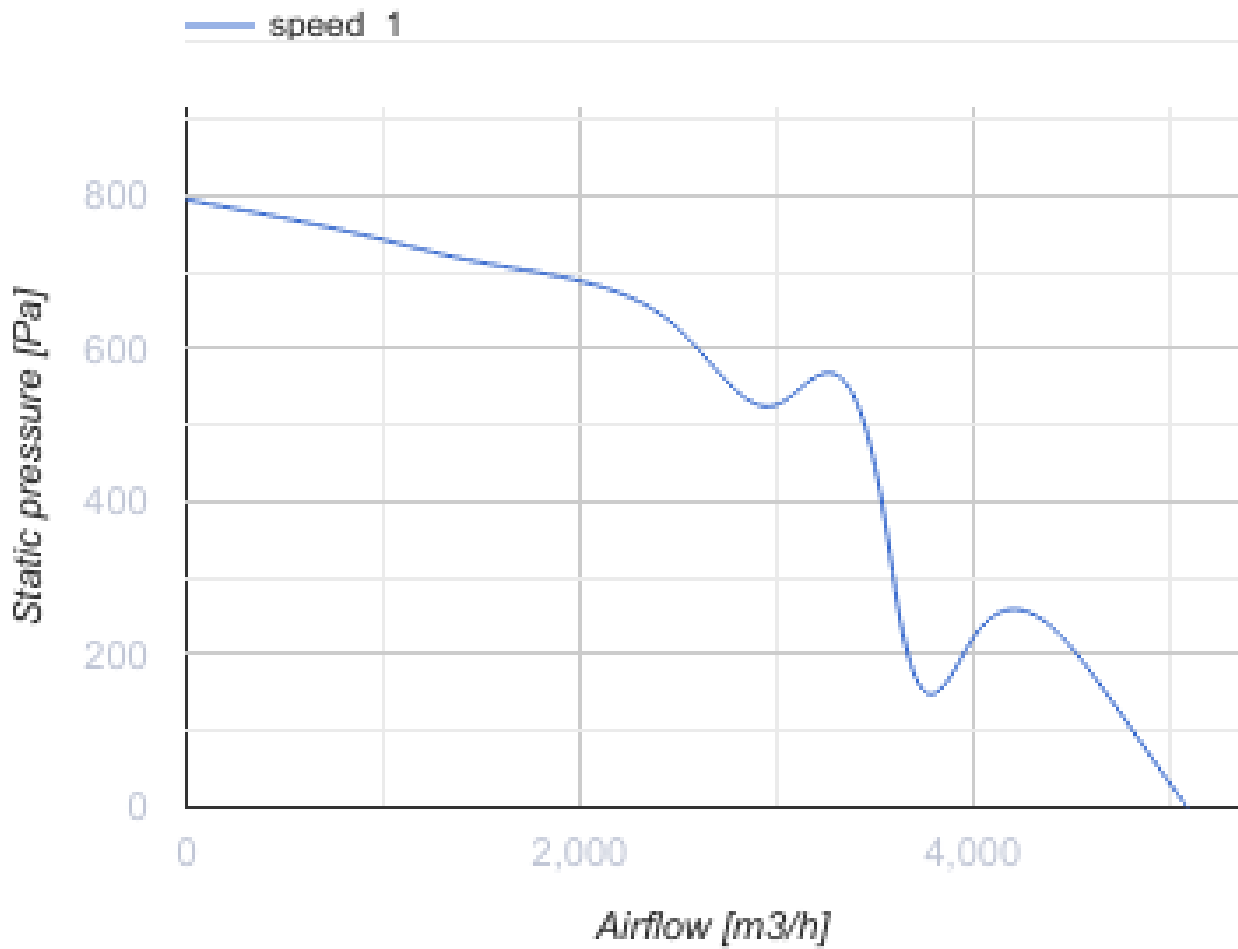


## Dimensions

| ØD  | B   | B1  | H   | H1  | L   | L1  | L2  | L3  | L4  |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 400 | 906 | 700 | 900 | 790 | 908 | 900 | 850 | 747 | 402 |



## Accessories

### Other accessories

| Name                    | Photo   | Description                       |
|-------------------------|---|-----------------------------------|
| <a href="#">VVG 400</a> |  | Flexible anti-vibration connector |