



# KSK 400 6E



Kitchen inline fans in sound-insulated casings with operational temperature of 120 °C


- Maximum airflow: 2915
- Sound pressure level LpA at 3 m: 48
- Fire resistance class: 120°C within 60 min
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Galvanized steel

	Unit of measurement	KSK 400 6E
Connected air duct size	mm	400
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50
Rated power	W	362
Unit current	A	1.71
Maximum airflow	m <sup>3</sup> /h	2915
Sound pressure level LpA at 3 m	dB(A)	48
Weight	kg	87
Transported air temperature (max)	°C	110
Transported air temperature (min)	°C	-20
Ingress protection rating	-	IP54

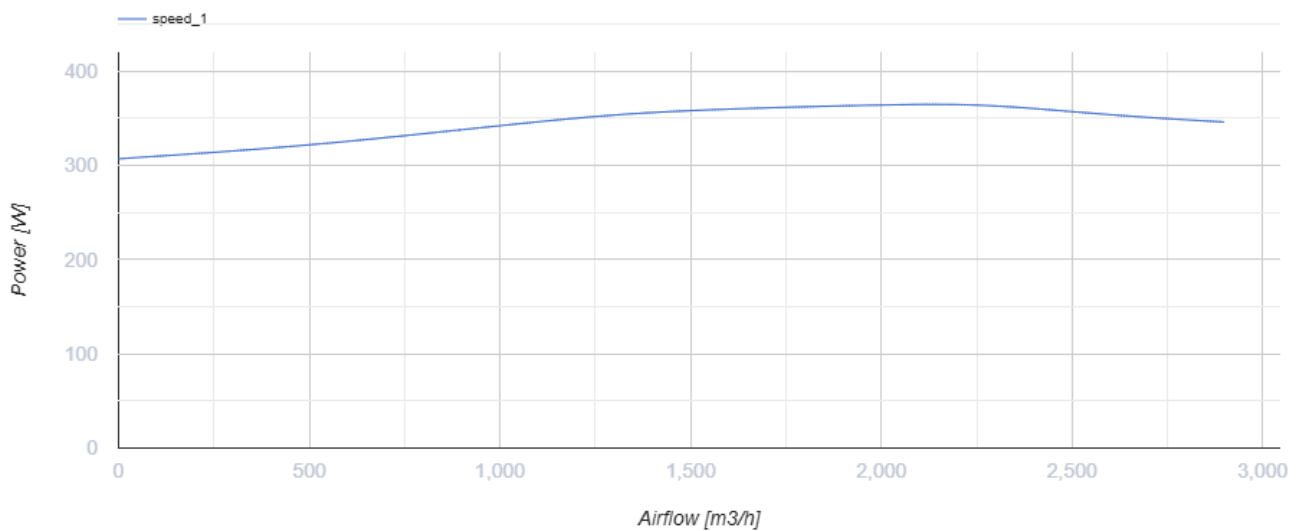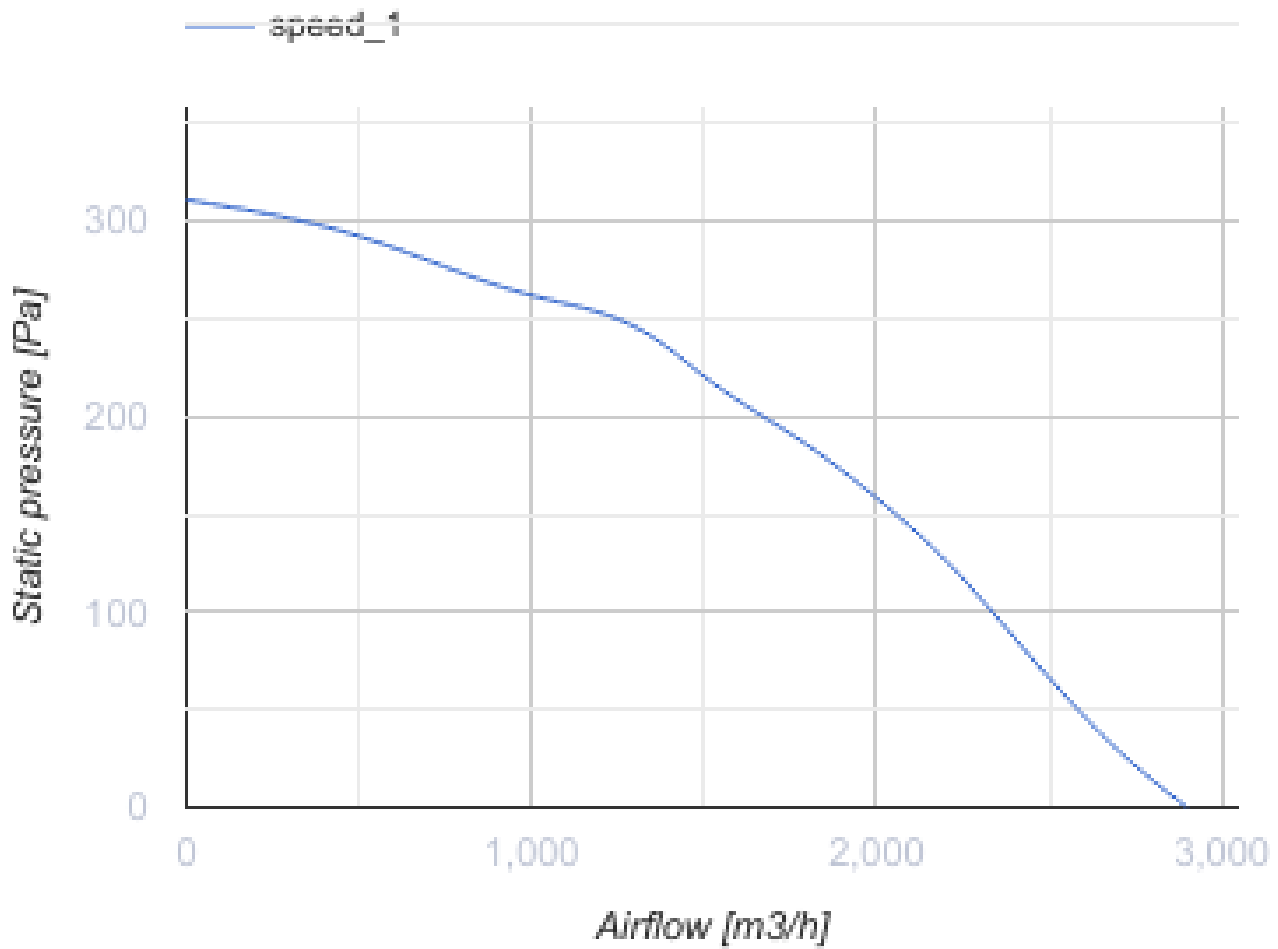

## Dimensions

ØD	B	B1	H	H1	L	L1	L2	L3	L4
400	906	700	900	790	908	900	850	687	402

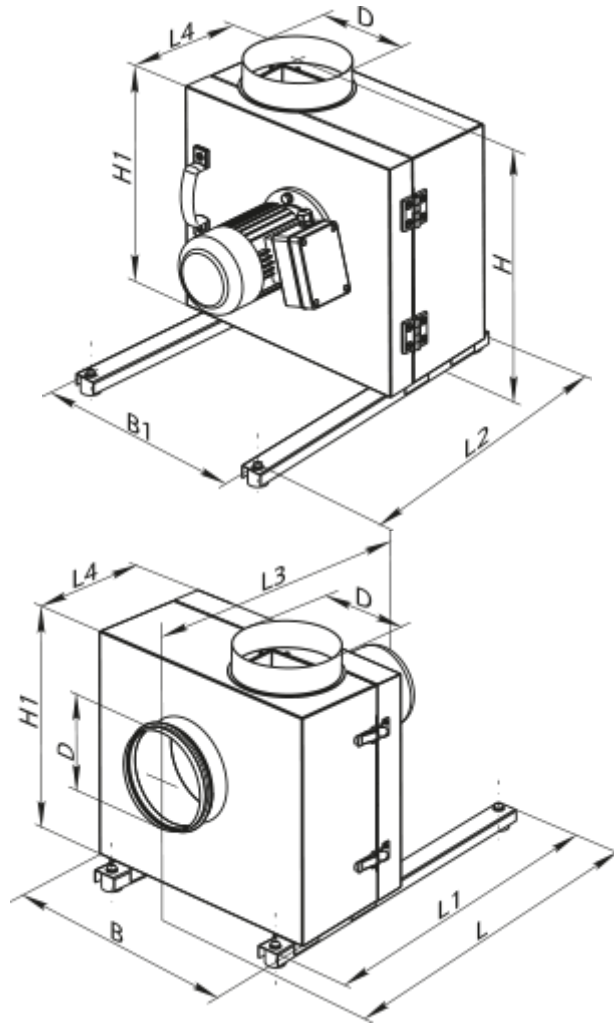

## Accessories

### Other accessories

Name	Photo	Description
<a href="#">VVG 400</a>		Flexible anti-vibration connector