



KSK 450 6E



Kitchen inline fans in sound-insulated casings with operational temperature of 120 °C


- Maximum airflow: 5299
- Sound pressure level LpA at 3 m: 50
- Fire resistance class: 120°C within 60 min
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Galvanized steel

| | Unit of measurement | KSK 450 6E |
|-----------------------------------|---------------------|------------|
| Connected air duct size | mm | 450 |
| Speed | - | 1 |
| Minimum supply voltage | V | 230 |
| Maximum supply voltage | V | 230 |
| Power supply frequency | Hz | 50 |
| Rated power | W | 594 |
| Unit current | A | 2.85 |
| Maximum airflow | m ³ /h | 5299 |
| Sound pressure level LpA at 3 m | dB(A) | 50 |
| Weight | kg | 105 |
| Transported air temperature (max) | °C | 110 |
| Transported air temperature (min) | °C | -20 |
| Ingress protection rating | - | IP54 |

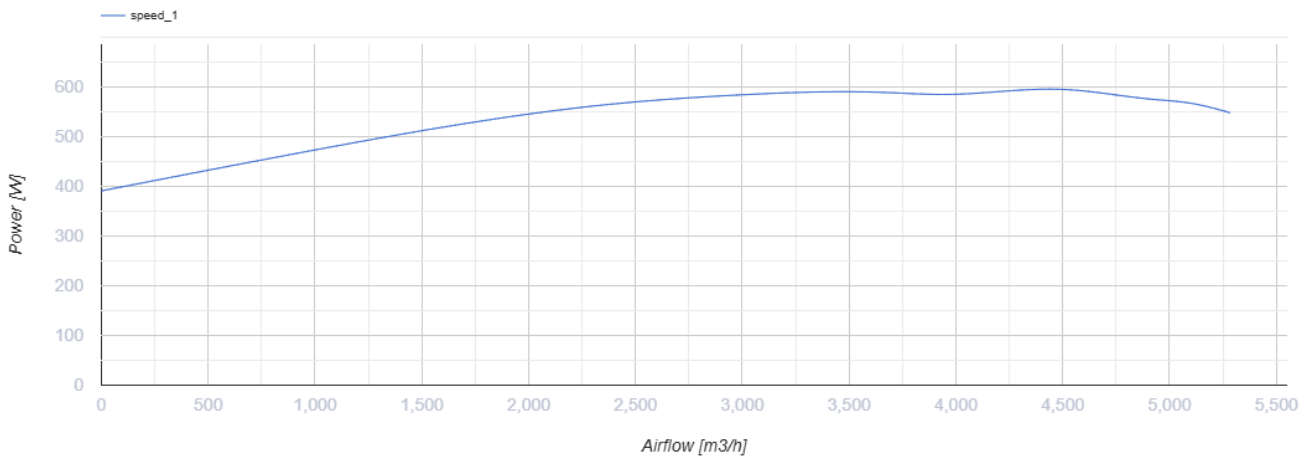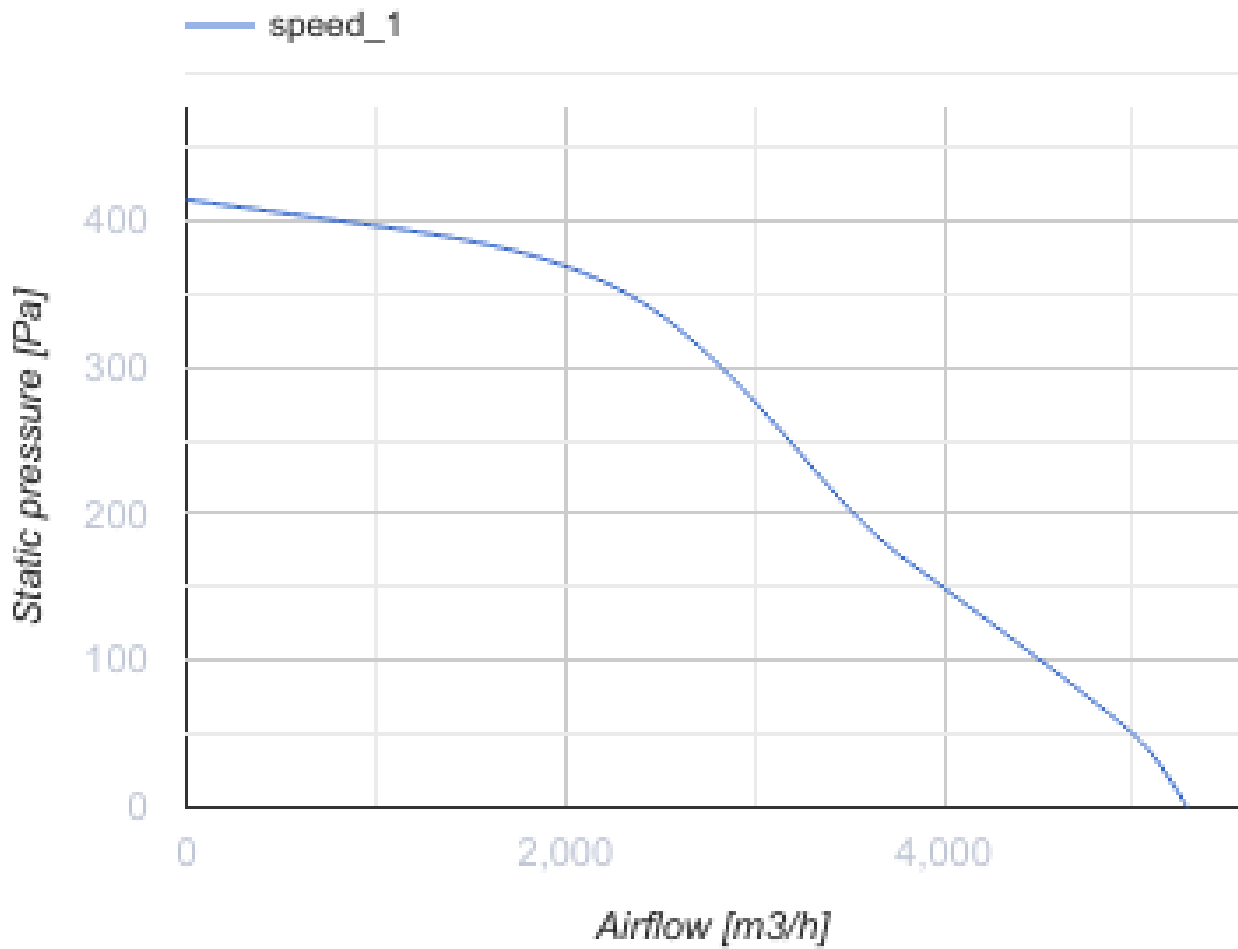


Dimensions

| ØD | B | B1 | H | H1 | L | L1 | L2 | L3 | L4 |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 450 | 996 | 750 | 980 | 870 | 925 | 900 | 850 | 739 | 437 |

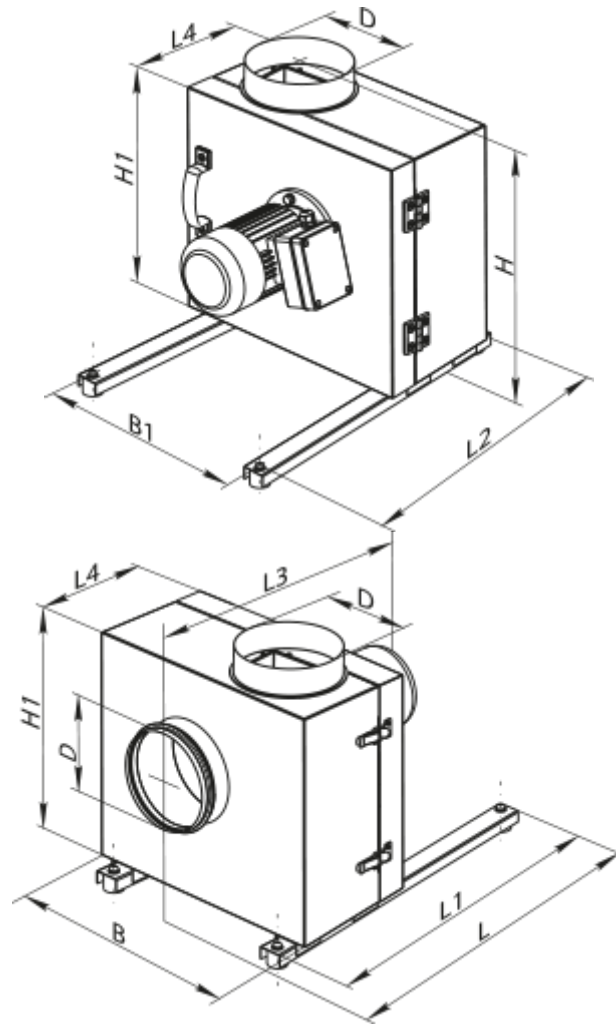

Accessories

Other accessories

| Name | Photo | Description |
|-------------------------|---|-----------------------------------|
| VVG 450 |  | Flexible anti-vibration connector |