


# KSV 100 Duo G4



Centrifugal fans in sound-insulated casing

- Maximum airflow: 190
- Sound pressure level LpA at 3 m: 23
- Filter: G4
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Coated steel
- Installation in any position

	Unit of measurement	KSV 100 Duo G4	
Connected air duct size	mm	100	
Speed	-	2	
Minimum supply voltage	V	230	
Maximum supply voltage	V	230	
Power supply frequency	Hz	50	
Rated power	W	34	42
Unit current	A	0.15	0.19
Maximum airflow	m <sup>3</sup> /h	160	190
Sound pressure level LpA at 3 m	dB(A)	14	23
Weight	kg	13.95	
Filter	-	G4	
Transported air temperature (max)	°C	40	
Transported air temperature (min)	°C	-25	
Ingress protection rating	-	IPX4	
Ingress protection rating of the drive	-	IP44	

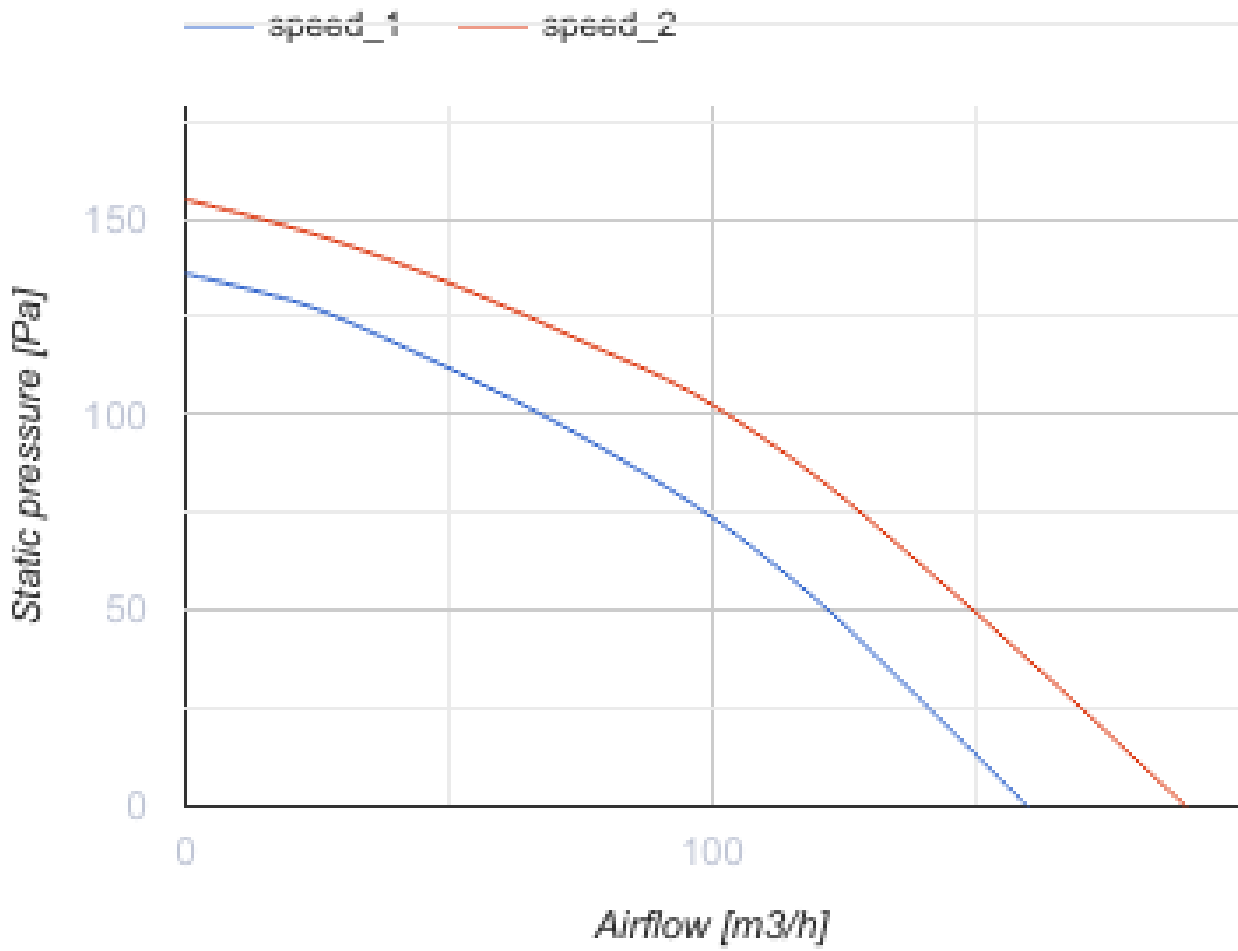


**Dimensions**

D	L	H	B	L1	B1	L2	B2
100	705	250	415	805	508	650	458



## Ecodesign

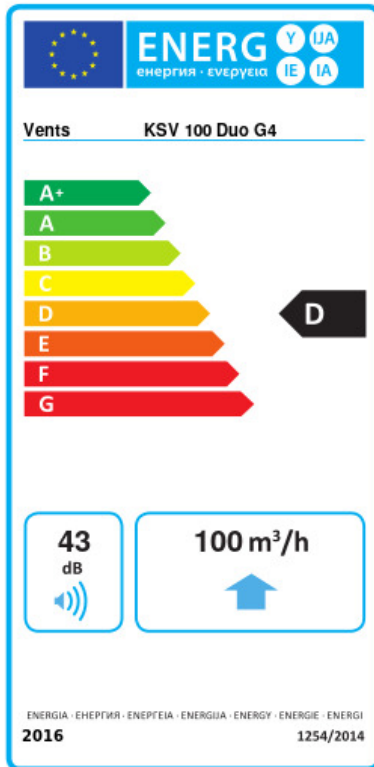

Trademark	Vents					
Model	KSV 100 Duo G4					
Specific energy consumption (SEC) (kWh/(m <sup>2</sup> /a))	Cold		Average		Warm	
	-48.3	A+	-21.2	D	-5.7	F
Type of ventilation unit	Unidirectional					
Type of drive installed	2-speed					
Type of heat recovery system	None					
Maximum flow rate (m <sup>3</sup> /h)	100					
Electric power input (W)	38					
Reference flow rate (m <sup>3</sup> /s)	0.034					
Reference pressure difference (Pa)	50					
Specific power input (SPI) (W/(m <sup>3</sup> /h))	0.38					
Control typology	Local demand control					
Maximum external leakage rates (%)	2.7					
Declared typology	RVU UVU					
Sound power level (dB(A))	43					
The annual electricity consumption (AEC) (kWh/a)	Cold	Average		Warm		
	284	284		284		
The annual heating saved (AHS) (kWh/a)	Cold	Average		Warm		
	5536	2830		1280		