


KSV 100 Duo G4/F8



Centrifugal fans in sound-insulated casing


- Maximum airflow: 175
- Sound pressure level LpA at 3 m: 23
- Filter: G4+F8
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Coated steel
- Installation in any position

	Unit of measurement	KSV 100 Duo G4/F8	
Connected air duct size	mm	100	
Speed	-	2	
Minimum supply voltage	V	230	
Maximum supply voltage	V	230	
Power supply frequency	Hz	50	
Rated power	W	33	41
Unit current	A	0.15	0.19
Maximum airflow	m ³ /h	150	175
Sound pressure level LpA at 3 m	dB(A)	14	23
Weight	kg	14.16	
Filter	-	G4+F8	
Transported air temperature (max)	°C	40	
Transported air temperature (min)	°C	-25	
Ingress protection rating	-	IPX4	
Ingress protection rating of the drive	-	IP44	

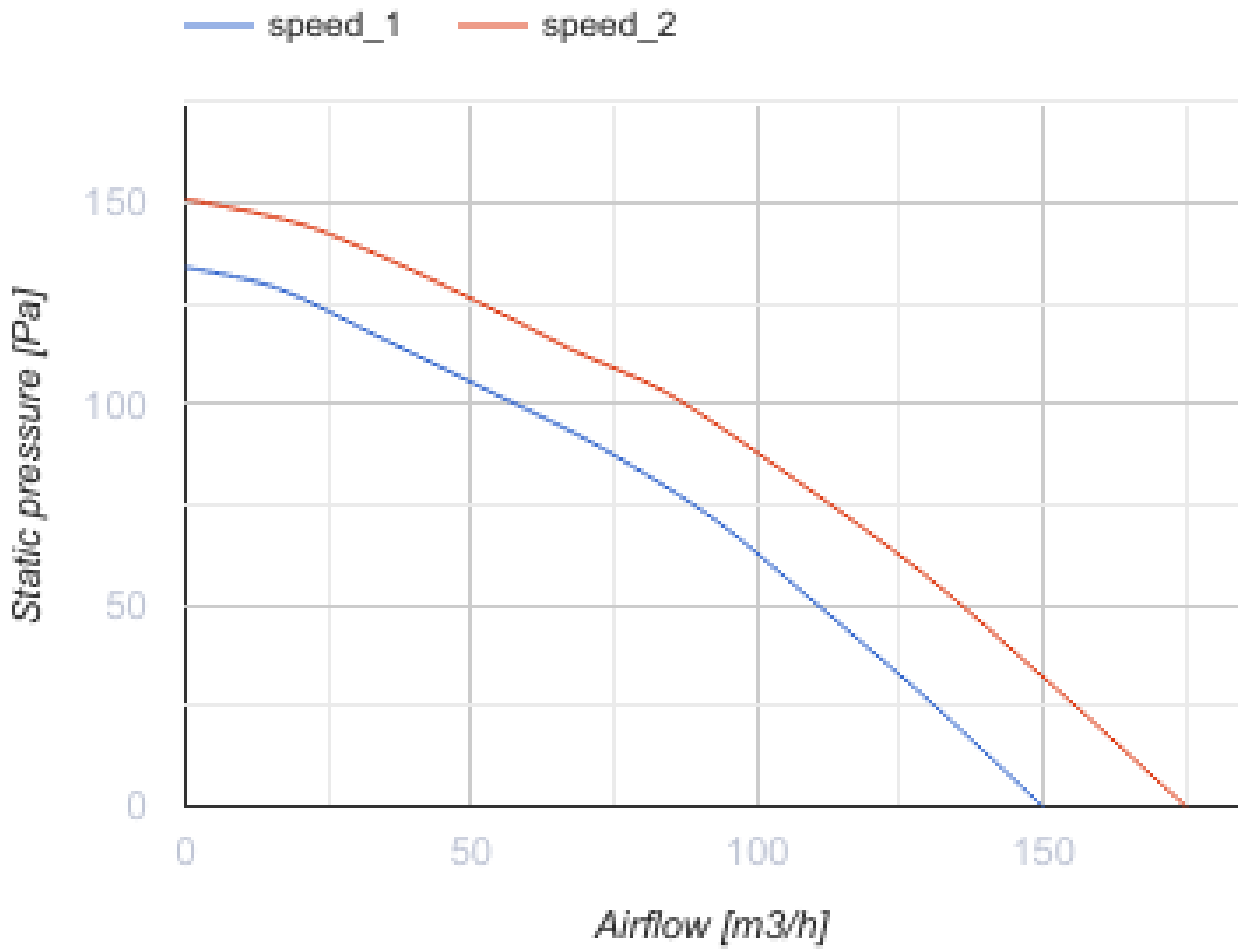


Dimensions

D	L	H	B	L1	B1	L2	B2
100	705	250	415	805	508	650	458

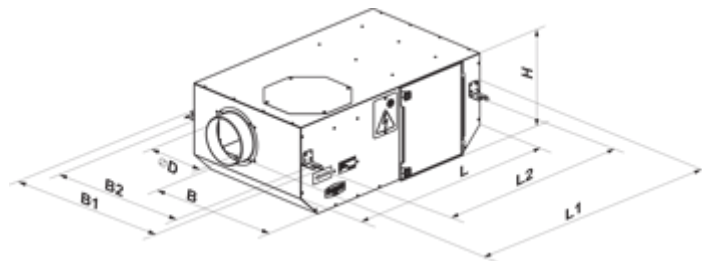

Ecodesign

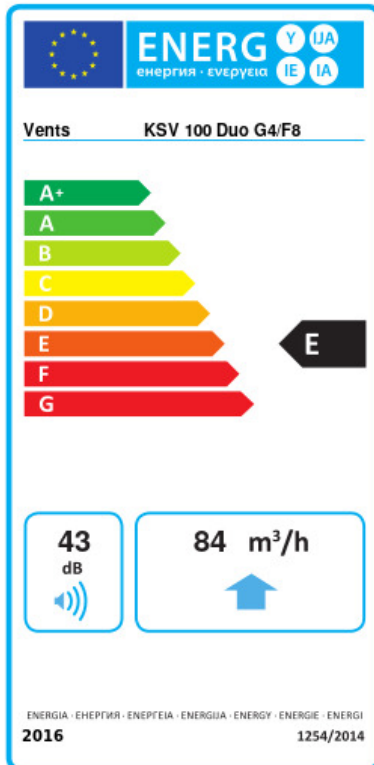

Trademark	Vents					
Model	KSV 100 Duo G4/F8					
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold		Average		Warm	
	-46.9	A+	-19.9	E	-4.3	F
Type of ventilation unit	Unidirectional					
Type of drive installed	2-speed					
Type of heat recovery system	None					
Maximum flow rate (m ³ /h)	84					
Electric power input (W)	38					
Reference flow rate (m ³ /s)	0.031					
Reference pressure difference (Pa)	50					
Specific power input (SPI) (W/(m ³ /h))	0.452					
Control typology	Local demand control					
Maximum external leakage rates (%)	2.7					
Declared typology	RVU UVU					
Sound power level (dB(A))	43					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	338		338		338	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	5536		2830		1280	