


KSV 150 Q

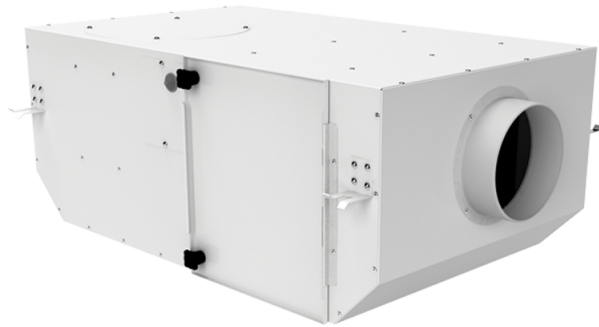

Centrifugal fans in sound-insulated casing

- Maximum airflow: 360
- Sound pressure level LpA at 3 m: 25
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Coated steel
- Installation in any position

| | Unit of measurement | KSV 150 Q |
|---|-------------------------|------------|
| Connected air duct size | mm | 150 |
| Speed | - | 1 |
| Minimum supply voltage | V | 230 |
| Maximum supply voltage | V | 230 |
| Power supply frequency | Hz | 50 |
| Rated power | W | 63 |
| Unit current | A | 0.29 |
| Maximum airflow | m ³ /h | 360 |
| Sound pressure level LpA at 3 m | dB(A) | 25 |
| Transported air temperature (max) | °C | 40 |
| Transported air temperature (min) | °C | -25 |
| Ingress protection rating | - | IPX4 |
| Ingress protection rating of the drive | - | IP44 |
| ErP compliance | - | 2016, 2018 |
| Cold - Specific energy consumption (SEC) | kWh/(m ² /a) | 52.1 |
| SEC Class Cold | - | A+ |
| Average - Specific energy consumption (SEC) | kWh/(m ² /a) | 25 |
| SEC Class Average | - | C |
| Warm - Specific energy consumption (SEC) | kWh/(m ² /a) | 9.5 |
| SEC Class Warm | - | F |
| Unit category | - | RVU |

| | | |
|--|-----------------------|----------------------|
| Type of ventilation unit | - | Unidirectional |
| Type of drive installed | - | Multi-speed |
| Type of heat recovery system | - | None |
| Maximum flow rate | m ³ /h | 300 |
| Electric power input | W | 75 |
| Reference flow rate | m ³ /s | 0.058 |
| Reference pressure difference | Pa | 50 |
| Specific power input (SPI) | W/(m ³ /h) | 0.25 |
| Control typology | - | Local demand control |
| Maximum external leakage rates | % | 2.7 |
| Cold - The annual electricity consumption (AEC) | kWh/a | 132 |
| Average - The annual electricity consumption (AEC) | kWh/a | 132 |
| Warm - Jährlicher Stromverbrauch (JSV) | kWh/a | 132 |
| Cold - The annual heating saved (AHS) | kWh/a | 5536 |
| The annual heating saved (AHS) Average | kWh/a | 2830 |
| The annual heating saved (AHS) Warm | kWh/a | 1280 |
| Sound power level | dB(A) | 45 |
| Declared typology | - | RVU UVU |

Dimensions

| D | L | H | B | L1 | B1 | L2 | B2 |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 150 | 705 | 250 | 415 | 805 | 508 | 650 | 458 |

