


# KSV 200 Duo G4/F8

Centrifugal fans in sound-insulated casing

- Maximum airflow: 590
- Sound pressure level LpA at 3 m: 38
- Filter: G4+F8
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Coated steel
- Installation in any position



	Unit of measurement	KSV 200 Duo G4/F8	
Connected air duct size	mm	200	
Speed	-	2	
Minimum supply voltage	V	230	
Maximum supply voltage	V	230	
Power supply frequency	Hz	50	
Rated power	W	103	121
Unit current	A	0.45	0.57
Maximum airflow	m <sup>3</sup> /h	380	590
Sound pressure level LpA at 3 m	dB(A)	22	38
Weight	kg	19.1	
Filter	-	G4+F8	
Transported air temperature (max)	°C	40	
Transported air temperature (min)	°C	-25	
Ingress protection rating	-	IPX4	
Ingress protection rating of the drive	-	IP44	

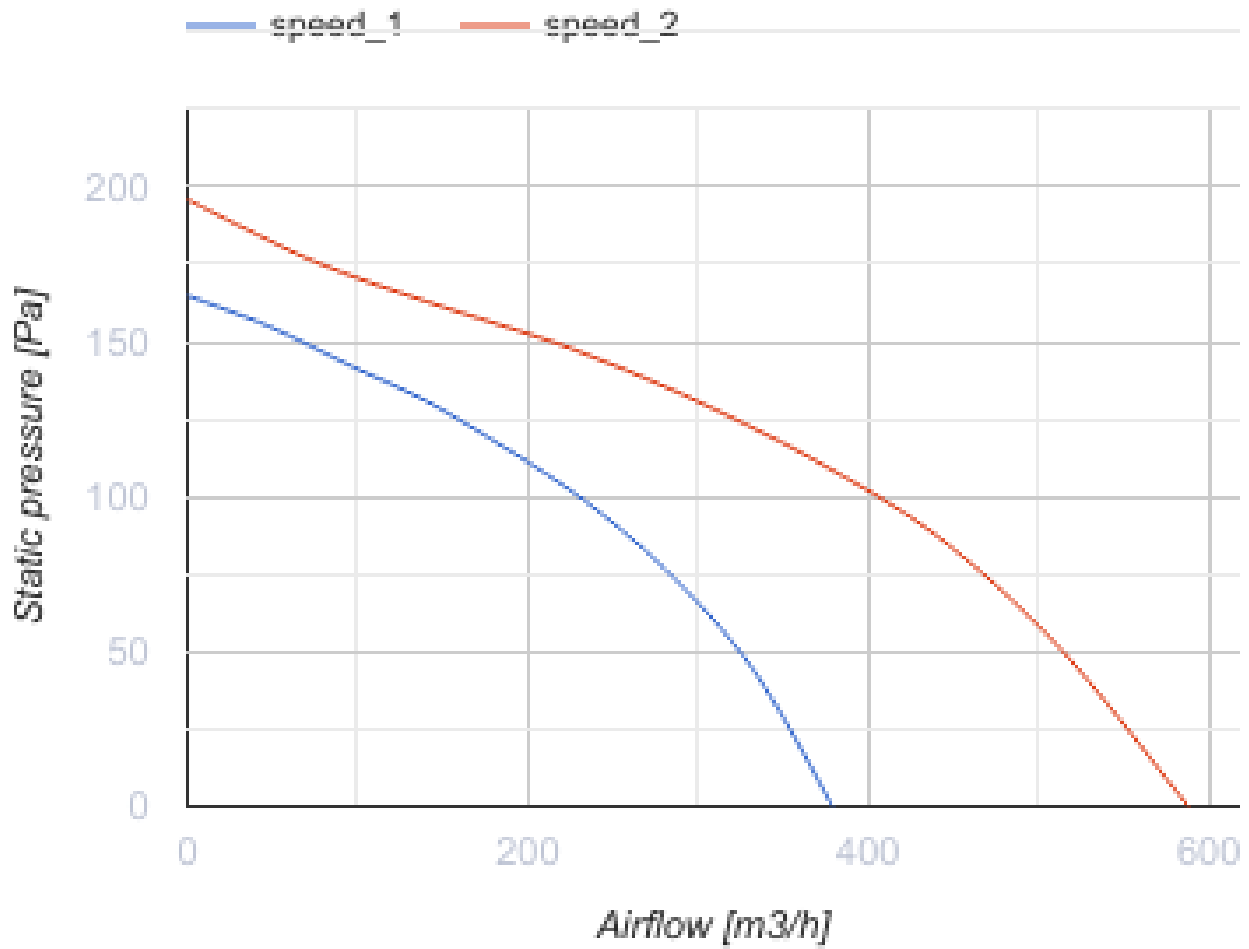


### Dimensions

D	L	H	B	L1	B1	L2	B2
200	735	300	605	835	698	680	648



## Ecodesign

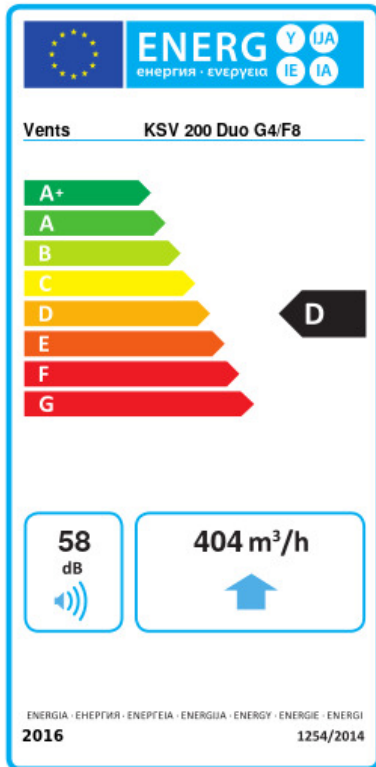

Trademark	Vents					
Model	KSV 200 Duo G4/F8					
Specific energy consumption (SEC) (kWh/(m <sup>2</sup> /a))	Cold		Average		Warm	
	-50	A+	-22.9	D	-7.4	F
Type of ventilation unit	Unidirectional					
Type of drive installed	2-speed					
Type of heat recovery system	None					
Maximum flow rate (m <sup>3</sup> /h)	404					
Electric power input (W)	116					
Reference flow rate (m <sup>3</sup> /s)	0.079					
Reference pressure difference (Pa)	50					
Specific power input (SPI) (W/(m <sup>3</sup> /h))	0.287					
Control typology	Local demand control					
Maximum external leakage rates (%)	2.7					
Sound power level (dB(A))	58					
Declared typology	RVU UVU					
The annual electricity consumption (AEC) (kWh/a)	Cold	Average		Warm		
	214	214		214		
The annual heating saved (AHS) (kWh/a)	Cold	Average		Warm		
	5536	2830		1280		