


# KSV 200 G4



Centrifugal fans in sound-insulated casing

- Maximum airflow: 580
- Sound pressure level LpA at 3 m: 38
- Filter: G4
- Sound insulation
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position

	Unit of measurement	KSV 200 G4
Connected air duct size	mm	200
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50
Rated power	W	123
Unit current	A	0.56
Maximum airflow	m <sup>3</sup> /h	580
Sound pressure level LpA at 3 m	dB(A)	38
Weight	kg	18.78
Filter	-	G4
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP44

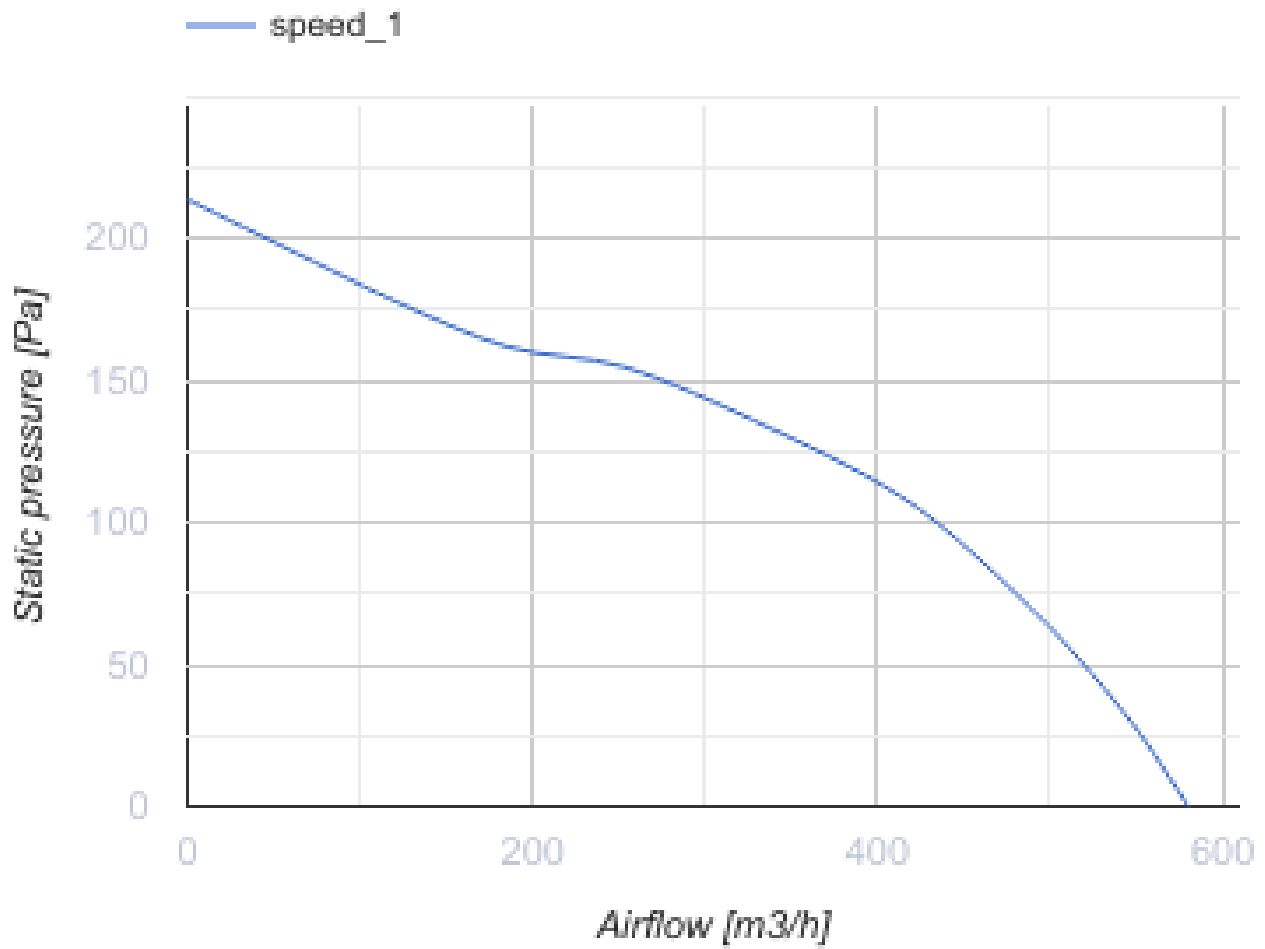


### Dimensions

<b>D</b>	<b>L</b>	<b>H</b>	<b>B</b>	<b>L1</b>	<b>B1</b>	<b>L2</b>	<b>B2</b>
200	735	300	605	835	698	680	648



## Ecodesign

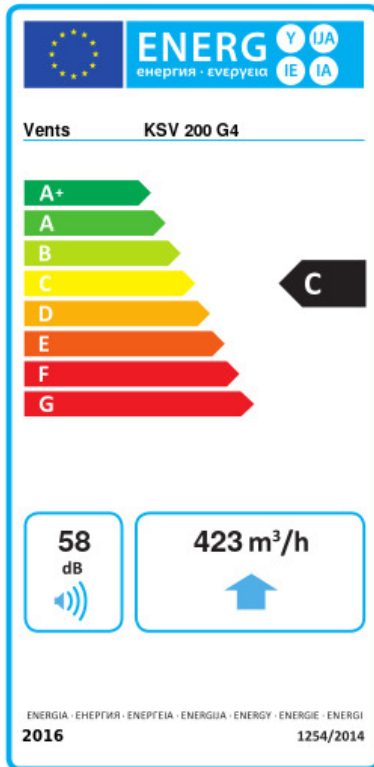

Trademark	Vents					
Model	KSV 200 G4					
Specific energy consumption (SEC) (kWh/(m <sup>2</sup> /a))	Cold		Average		Warm	
	-51.9	A+	-24.9	C	-9.4	F
Type of ventilation unit	Unidirectional					
Type of drive installed	Multi-speed					
Type of heat recovery system	None					
Maximum flow rate (m <sup>3</sup> /h)	423					
Electric power input (W)	110					
Reference flow rate (m <sup>3</sup> /s)	0.082					
Reference pressure difference (Pa)	50					
Specific power input (SPI) (W/(m <sup>3</sup> /h))	0.26					
Control typology	Local demand control					
Maximum external leakage rates (%)	2.7					
Declared typology	RVU UVU					
Sound power level (dB(A))	58					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	138		138		138	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	5536		2830		1280	