

Micra 60 A4



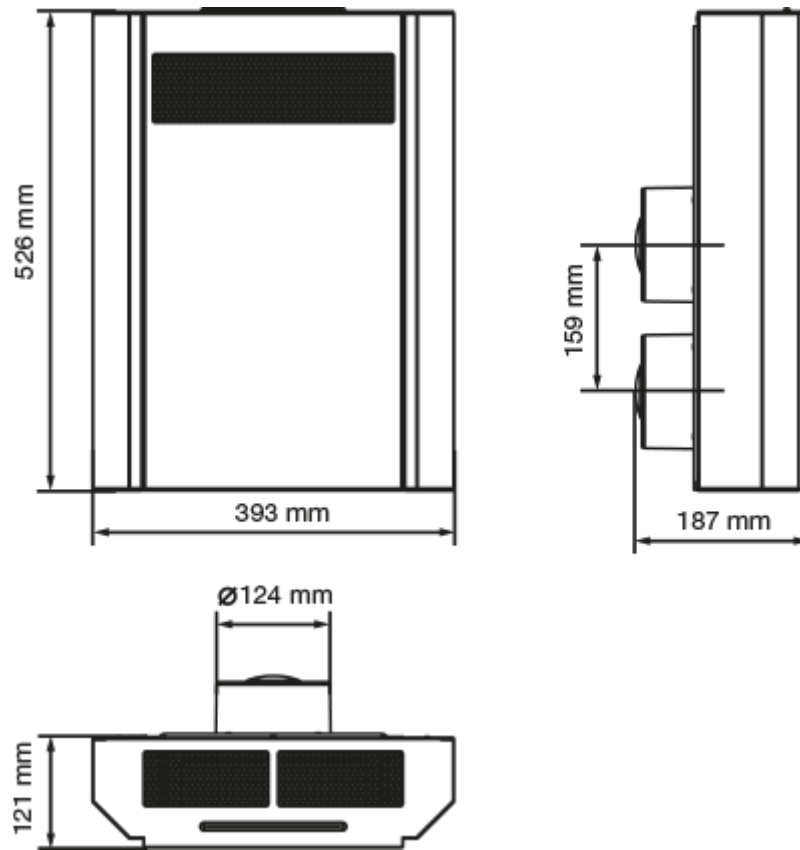
Micra 60 – is the single room air handling unit for balanced energy saving single room ventilation of flats, cottages, social and commercial premises. No need to connect air ducts. The best solution for simple and efficient ventilation in refurbished premises

- Maximum airflow: 60
- Sound pressure level LpA at 3 m: 29
- Heat recovery efficiency: 79
- Heat exchanger type: Counter flow
- Extract filter: G4
- Supply filter: G4
- Sound insulation
- Motor type: EC
- Bypass: Auto
- Casing material: Polypropylene/Thermoplastic elastomer
- Humidity sensor: Optional

	Unit of measurement	Micra 60 A4		
Connected air duct size	mm	125		
Speed	-	3		
Minimum supply voltage	V	100		
Maximum supply voltage	V	240		
Power supply frequency	Hz	50/60		
Rated power	W	4.2	9.6	15.4
Unit current	A	0.02	0.04	0.07
Maximum airflow	m ³ /h	30	45	60
Sound pressure level LpA at 3 m	dB(A)	22	25	29
Heat recovery efficiency	%	79	74	70
Heat exchanger type	-	Counter flow		
Heat exchanger material	-	Polystyrene		
Weight	kg	10.3		
Extract filter	-	G4		
Supply filter	-	G4		
Transported air temperature (max)	°C	50		
Transported air temperature (min)	°C	-20		
Ambient air temperature min	°C	1		
Ambient air temperature max	°C	40		
Ambient air humidity max	%	80		
Ingress protection rating	-	IP22		





Ingress protection rating of the drive	-	IP44
----------------------------------------	---	------

Dimensions



Accessories

Other accessories

Name	Photo	Description
MK1 Micra 60		Mounting kit
MK2 Micra 60		Mounting kit
NB Micra 60		Outer ventilation box
SF 216x147x10 G4		Panel filter G4

SF 279x88x10 G4



Panel filter G4