

MPA 1200 E3 LCD




Supply units in the compact sound- and heat-insulated casing with water or electric heater

- Power of electrical reheater: 9900
- Maximum airflow: 1200
- Sound pressure level LpA at 3 m: 38
- Filter: G4
- Sound insulation
- Motor type: AC
- Reheater: Electric
- Control: Remote Control
- Casing material: Galvanized steel

	Unit of measurement	MPA 1200 E3 LCD
Connected air duct size	mm	400x200
Speed	-	1
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	410
Power of electrical reheater	W	9900
Unit current	A	16.1
Maximum airflow	m ³ /h	1200
Sound pressure level LpA at 3 m	dB(A)	38
Weight	kg	38.9
Filter	-	G4
Transported air temperature (max)	°C	45
Transported air temperature (min)	°C	-25
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ambient air humidity max	%	80
Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP44

Dimensions

B	B1	B2	B3	H	H1	H2	L	L1	L2
400	420	549	500	200	220	352	650	530	-

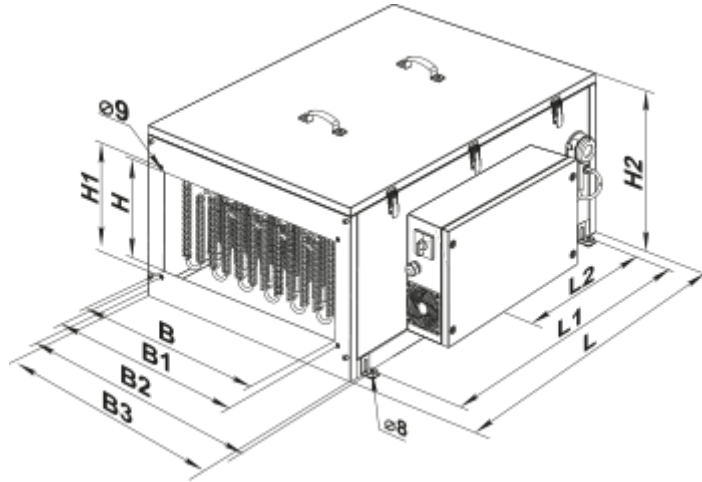

Accessories


For rectangular ducts

Name	Photo	Description
SR 400x200		Plate silencer for installation in rectangular ducts

Water coolers


Name	Photo	Description
OKW 400x200-3		Rectangular inline water coolers

Airflow regulators

Name	Photo	Description
RRV 400x200		Air flow controllers

Mixing chambers


Name	Photo	Description
------	-------	-------------

SKRA 400x200/24		Mixing chambers for mixing (recirculating) part of the exhaust air with the outdoor air in the appropriate proportion
---------------------------------	---	---

For rectangular ducts

Name	Photo	Description
VVG 400x200		Flexible anti-vibration inserts for round air ducts

Freon coolers

Name	Photo	Description
OKF 400x200-3		Rectangular inline direct evaporative coolers

Other accessories

Name	Photo	Description
SF 442x275x47 G4		Panel filter G4