

# MPA 1200 W LCD



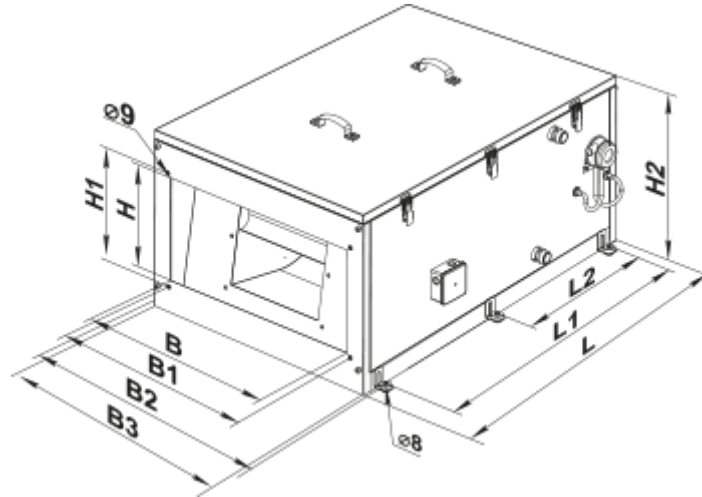
Supply units in the compact sound- and heat-insulated casing with water or electric heater

- Maximum airflow: 1200
- Sound pressure level LpA at 3 m: 38
- Filter: G4
- Sound insulation
- Motor type: AC
- Reheater: Water
- Control: Remote Control
- Casing material: Galvanized steel

	Unit of measurement	MPA 1200 W LCD
Connected air duct size	mm	400x200
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50
Rated power	W	410
Unit current	A	1.8
Maximum airflow	m <sup>3</sup> /h	1200
Sound pressure level LpA at 3 m	dB(A)	38
Weight	kg	42.8
Filter	-	G4
Transported air temperature (max)	°C	45
Transported air temperature (min)	°C	-40
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ambient air humidity max	%	80
Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP44



## Dimensions

B	B1	B2	B3	H	H1	H2	L	L1	L2
400	420	549	500	200	220	352	650	530	-



## Accessories


### Mixing chambers

Name	Photo	Description
<a href="#">USWK 3/4-4</a>		The mixing unit USWK is designed for smooth heat medium flow control in ventilation systems equipped with water heaters or coolers for supply air temperature regulation
<a href="#">USWK 3/4-6</a>		The mixing unit USWK is designed for smooth heat medium flow control in ventilation systems equipped with water heaters or coolers for supply air temperature regulation

### For rectangular ducts


Name	Photo	Description
<a href="#">SR 400x200</a>		Plate silencer for installation in rectangular ducts

### Water coolers


Name	Photo	Description
<a href="#">OKW 400x200-3</a>		Rectangular inline water coolers

### Airflow regulators


Name	Photo	Description
------	-------	-------------

<a href="#">RRV 400x200</a>		Air flow controllers
-----------------------------	---	----------------------


### Mixing chambers

Name	Photo	Description
<a href="#">SKRA 400x200/24</a>		Mixing chambers for mixing (recirculating) part of the exhaust air with the outdoor air in the appropriate proportion


### For rectangular ducts

Name	Photo	Description
<a href="#">VVG 400x200</a>		Flexible anti-vibration inserts for round air ducts

### Freon coolers

Name	Photo	Description
<a href="#">OKF 400x200-3</a>		Rectangular inline direct evaporative coolers

### Other accessories

Name	Photo	Description
SF 442x275x47 G4		Panel filter G4