

# MPA 2500 E3 LCD




Supply units in the compact sound- and heat-insulated casing with water or electric heater

- Power of electrical reheater: 18000
- Maximum airflow: 2500
- Sound pressure level LpA at 3 m: 45
- Filter: G4
- Sound insulation
- Motor type: AC
- Reheater: Electric
- Control: Remote Control
- Casing material: Galvanized steel

	Unit of measurement	MPA 2500 E3 LCD
Connected air duct size	mm	500x300
Speed	-	1
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	650
Power of electrical reheater	W	18000
Unit current	A	28.8
Maximum airflow	m <sup>3</sup> /h	2500
Sound pressure level LpA at 3 m	dB(A)	45
Weight	kg	62
Filter	-	G4
Transported air temperature (max)	°C	45
Transported air temperature (min)	°C	-25
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ambient air humidity max	%	80
Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP44

## Dimensions

B	B1	B2	B3	H	H1	H2	L	L1	L2
500	520	649	600	300	320	480	800	680	-

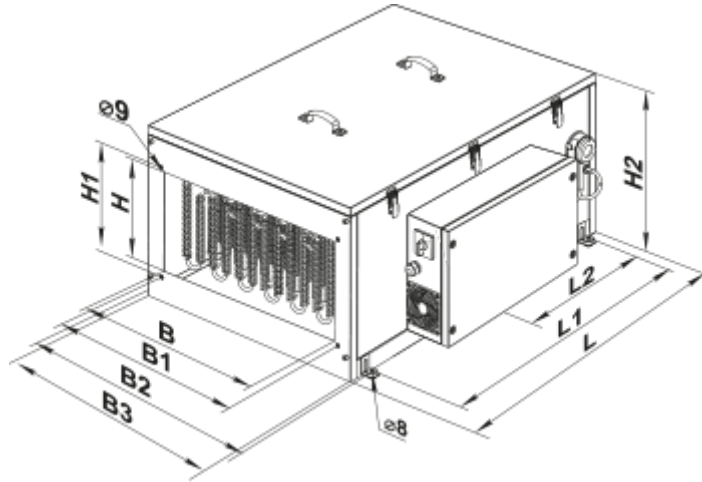

## Accessories


### For rectangular ducts

Name	Photo	Description
<a href="#">SR 500x300</a>		Plate silencer for installation in rectangular ducts

### Airflow regulators


Name	Photo	Description
<a href="#">RRV 500x300</a>		Air flow controllers

### Mixing chambers

Name	Photo	Description
<a href="#">SKRA 500x300/24</a>		Mixing chambers for mixing (recirculating) part of the exhaust air with the outdoor air in the appropriate proportion

### For rectangular ducts


Name	Photo	Description
------	-------	-------------

<a href="#">VVG 500x300</a>		Flexible anti-vibration inserts for round air ducts
-----------------------------	---	---

### Water coolers

Name	Photo	Description
<a href="#">OKW 500x300-3</a>		Rectangular inline water coolers

### Freon coolers

Name	Photo	Description
<a href="#">OKF 500x300-3</a>		Rectangular inline direct evaporative coolers

### Other accessories

Name	Photo	Description
SF 390x545x47 G4		Panel filter G4