




# MPA 300 E-1.7 EC A31

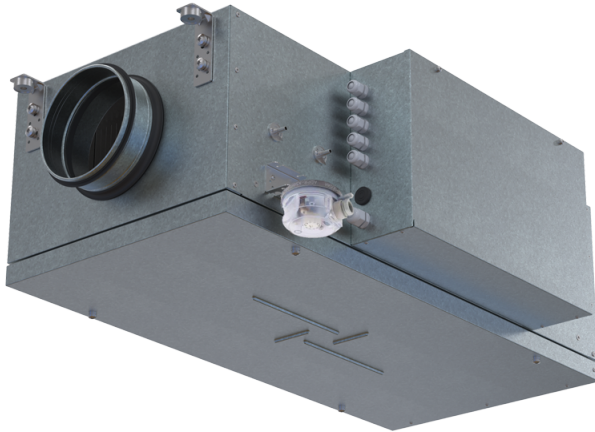

Air supply units in the sound- and heat-insulated casing


- Power of electrical reheater: 1700
- Maximum airflow: 365
- Sound pressure level LpA at 3 m: 35
- Filter: Coarse 90% / G4 (option ePM1 70% / F7)
- Sound insulation
- Motor type: EC
- Reheater: Electric
- BMS protocol: ModBus
- Control: Wired control panel
- Casing material: Aluzinc steel

	Unit of measurement	MPA 300 E-1.7 EC A31
Connected air duct size	mm	160
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50
Rated power	W	64
Power of electrical reheater	W	1700
Unit current	A	7.7
Maximum airflow	m <sup>3</sup> /h	365
Sound pressure level LpA at 3 m	dB(A)	35
Weight	kg	24
Filter	-	Coarse 90% / G4 (option ePM1 70% / F7)
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-30
Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP44

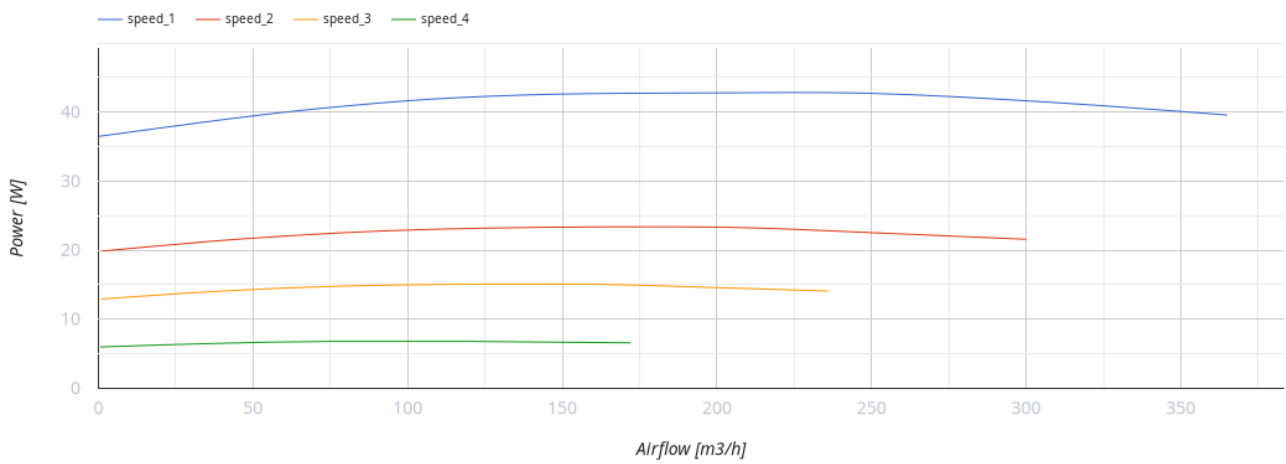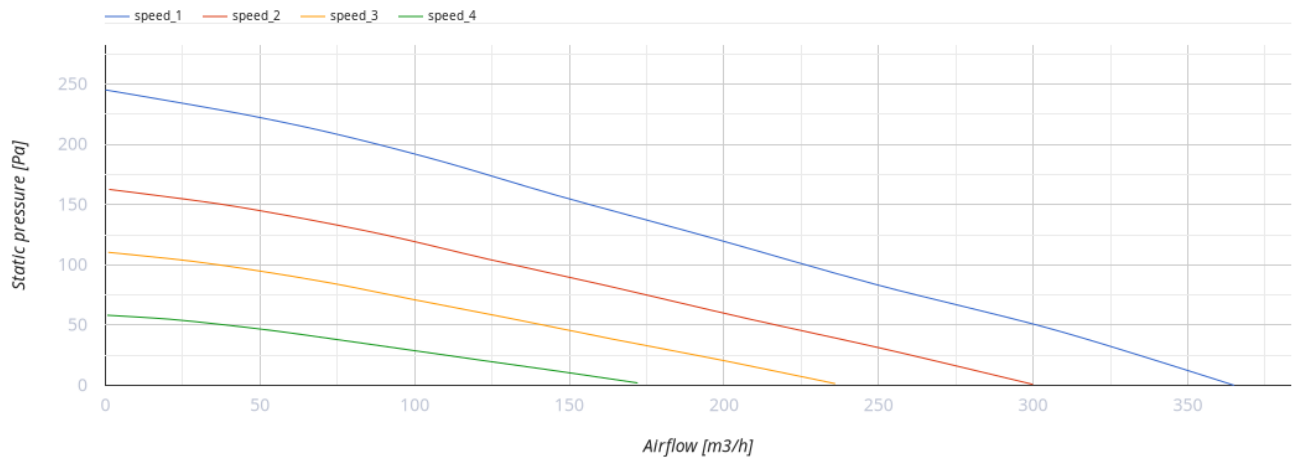



## Dimensions

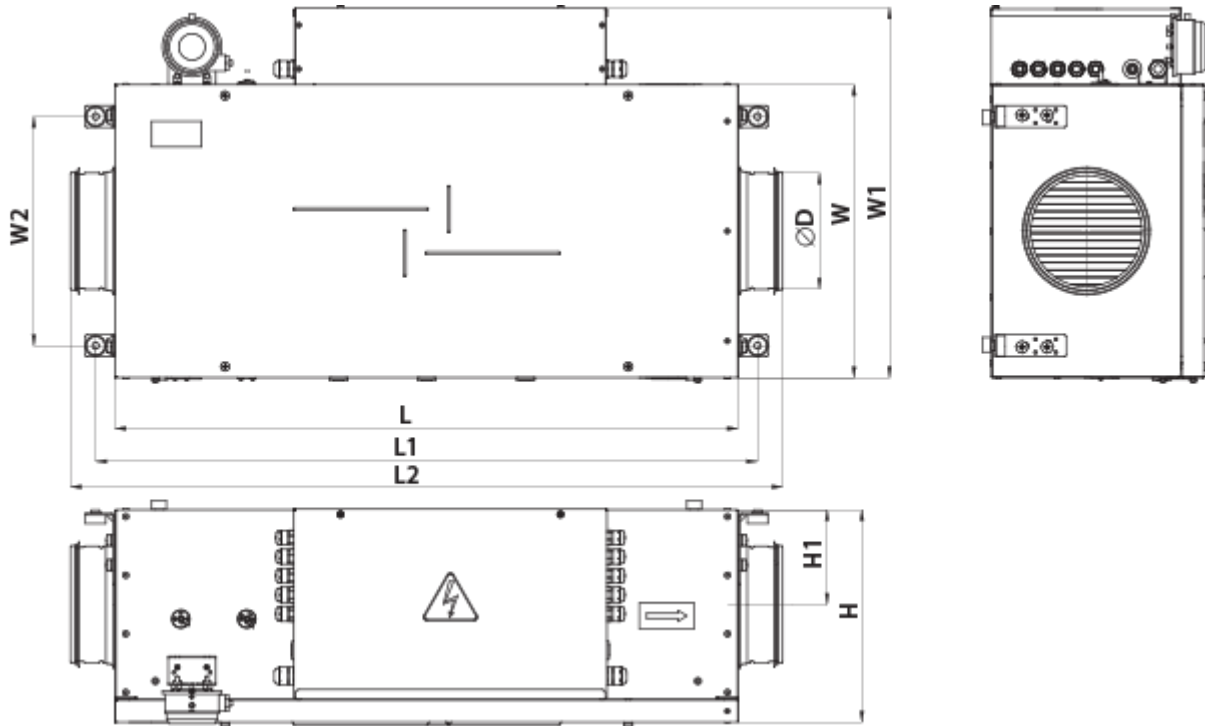D	H	L	L1	L2	W	W1	W2
160	290	850	903	950	400	514	313




## Accessories



### Other accessories


Name	Photo	Description
SF 334x226x48 G4		Panel filter G4
SF 334x226x48 F7		F7 panel filter

### Other accessories

Name	Photo	Description
<a href="#">VVG 125</a>		Flexible anti-vibration inserts for round ducts

### For round ducts



Name	Photo	Description
<a href="#">SR 125/600</a>		Silencers made of galvanized steel filled with non-combustible sound-absorbing material
<a href="#">SR 125/900</a>		Silencers made of galvanized steel filled with non-combustible sound-absorbing material

<a href="#">SR 125/1200</a>		Silencers made of galvanized steel filled with non-combustible sound-absorbing material
-----------------------------	---	---


### For round ducts

Name	Photo	Description
<a href="#">KRV 125</a>		Air dampers for automatic air flow control in round ducts

### Electric actuators

Name	Photo	Description
<a href="#">Belimo TF230</a>		The actuators are designed for controlling air dampers with cross section up to 0.4 m <sup>2</sup> performing protection functions
<a href="#">Belimo TF24</a>		The actuators are designed for controlling air dampers with cross section up to 0.4 m <sup>2</sup> performing protection functions

## Ecodesign

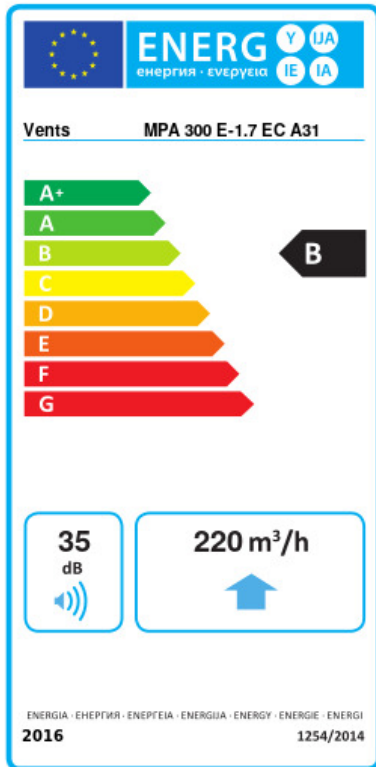

Trademark	Vents					
Model	MPA 300 E-1.7 EC A31					
Specific energy consumption (SEC) (kWh/(m²/a))	Cold		Average		Warm	
	53.9	A+	26.8	B	11.3	E
Type of ventilation unit	Unidirectional					
Type of drive installed	Variable speed					
Type of heat recovery system	None					
Maximum flow rate (m³/h)	220					
Electric power input (W)	64					
Reference flow rate (m³/s)	0.058					
Reference pressure difference (Pa)	50					
Specific power input (SPI) (W/(m³/h))	0.114					
Control typology	Local demand control					
Maximum internal leakage rates (%)	2.7					
Maximum external leakage rates (%)	2.7					
Declared typology	RVU UVU					
Sound power level (dB(A))	35					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	60		60		60	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	5536		2830		1280	